

Nyto Surface Adjustable 30 2x LED 1800-3000K Flood DE

139559XX


1

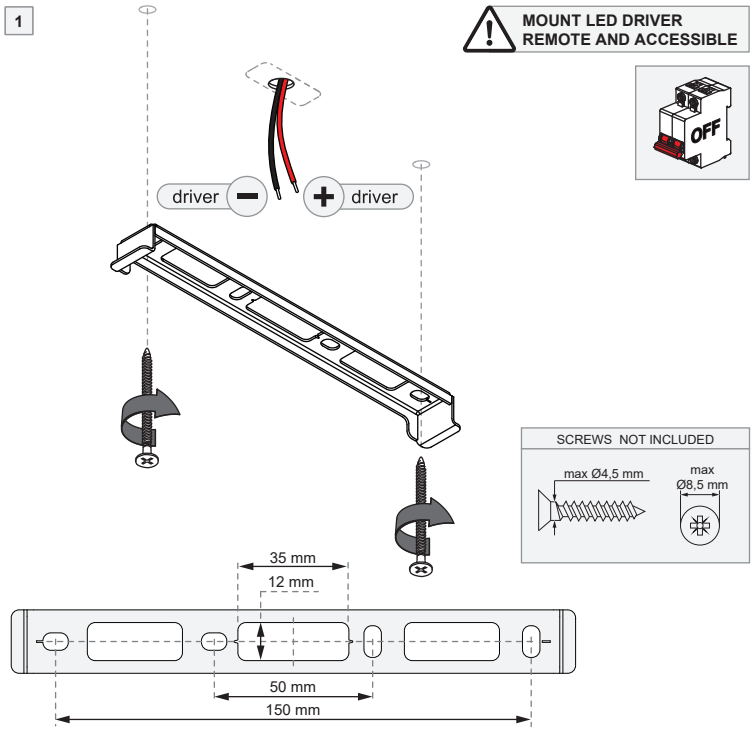

2

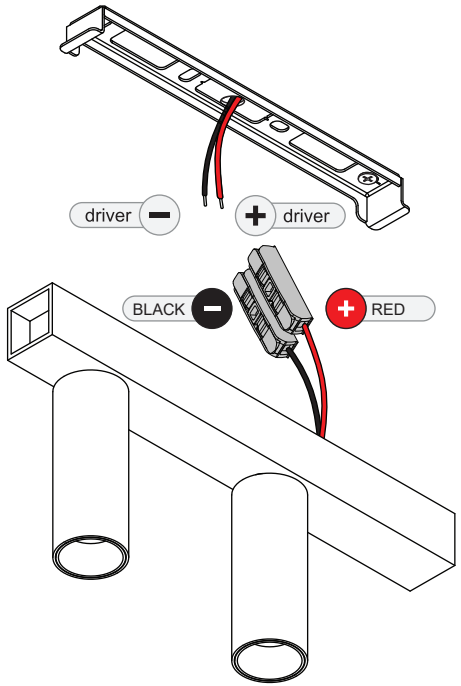

3

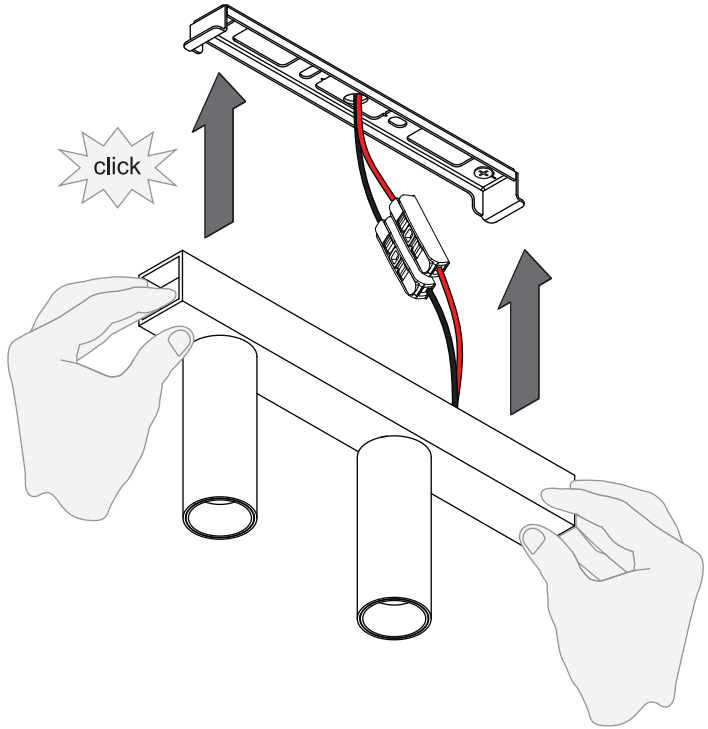


WARM DIM
ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage min (Vf)	Forward Voltage max (Vf)	Power (W)
350	31	37	12
RED		BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

SERIAL CONNECTION 1 DRIVER




Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

WARM DIM
ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage min (Vf)	Forward Voltage max (Vf)	Power (W)
350	15,5	18,5	6
RED		BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.


1 LED 1 DRIVER | 1 LED 1 DRIVER

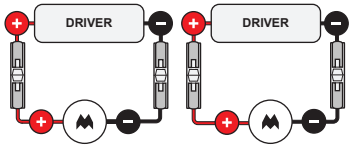


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

DRIVERS & ACCESSORIES	For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

4

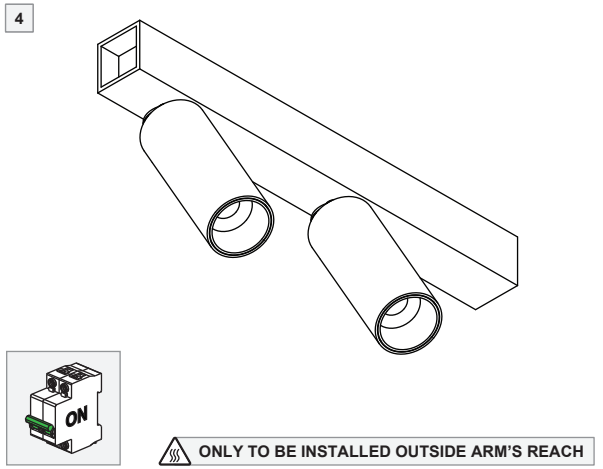

5 UNINSTALL

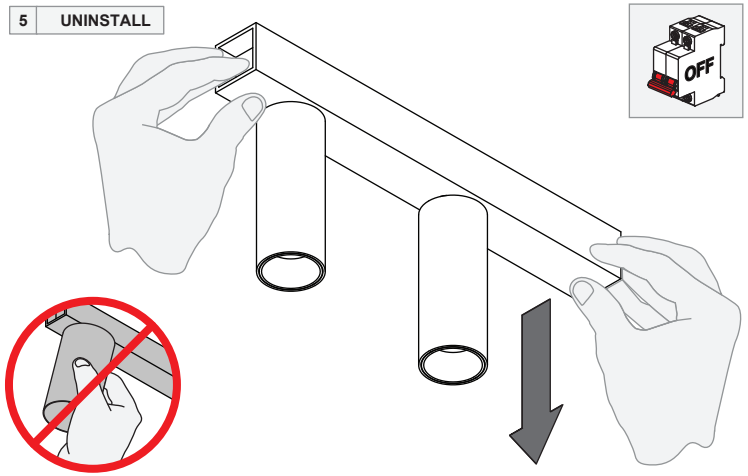

01 - 24/03/2025

III | IP 20 | UK CA | CE