

Nyto Surface Adjustable 40 2x LED Spot DE

139560XX_139564XX


1


MOUNT LED DRIVER REMOTE AND ACCESSIBLE



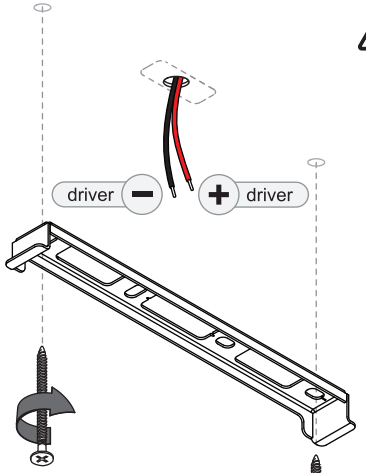

SCREWS NOT INCLUDED



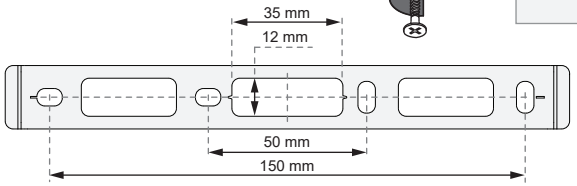


ELECTRICAL SPECS FIXTURE

Drive Current (mA)	Forward Voltage min (Vf)	Forward Voltage max (Vf)	Power (W)
350	22,8	24,4	8,2
500	23,8	25,4	12,2
RED		BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

SERIAL CONNECTION 1 DRIVER




Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

ELECTRICAL SPECS LED

Drive Current (mA)	Forward Voltage min (Vf)	Forward Voltage max (Vf)	Power (W)
350	11,4	12,2	4,1
500	11,9	12,7	6,1
RED		BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.


1 LED 1 DRIVER **1 LED 1 DRIVER**

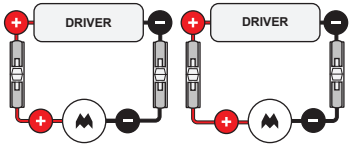


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

DRIVERS & ACCESSORIES	For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.


2

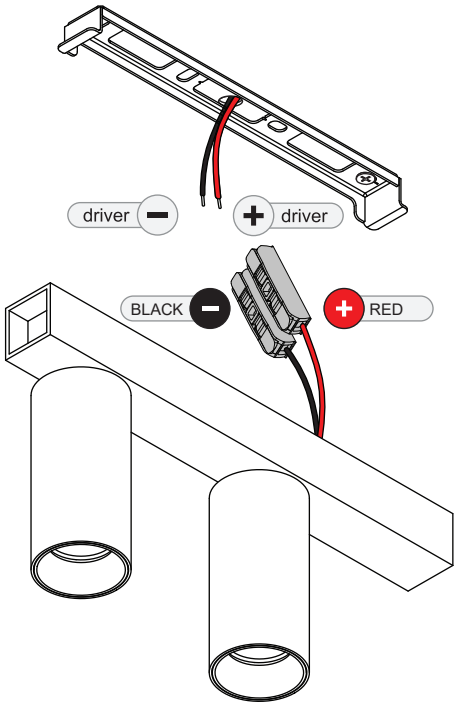


3

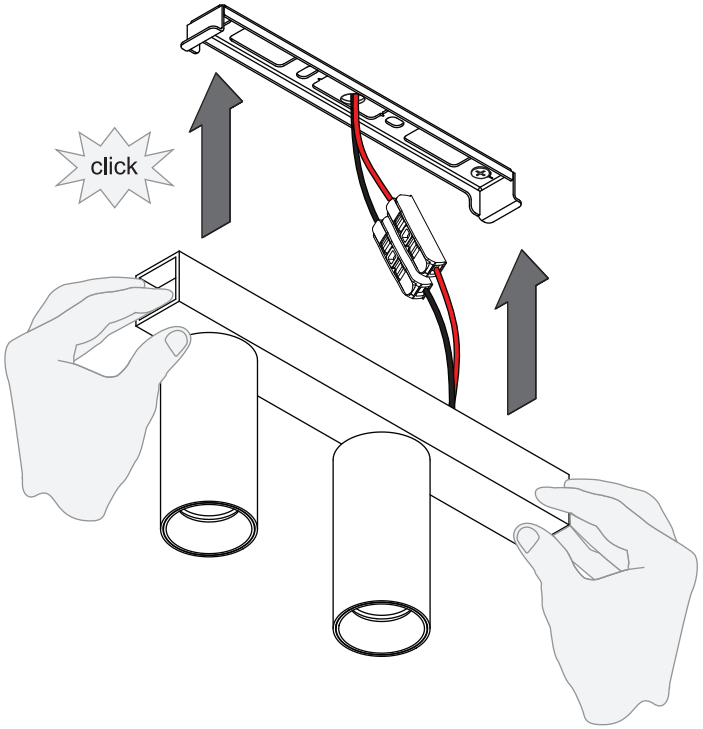


4

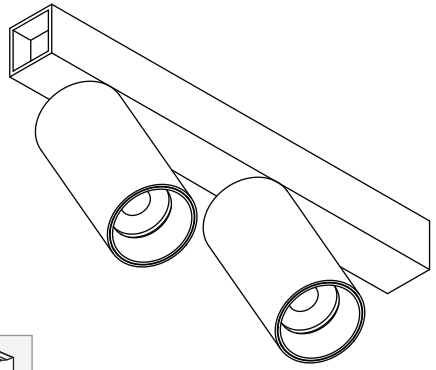



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

5 **UNINSTALL**

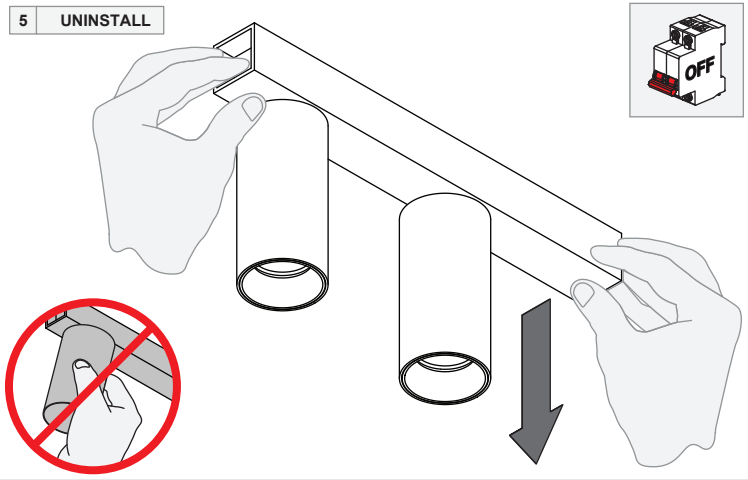

01 - 24/03/2022

III IP 20 UK CA CE