
Nyto Surface Adjustable 50 2x LED Spot DE


139581XX_139586XX

1

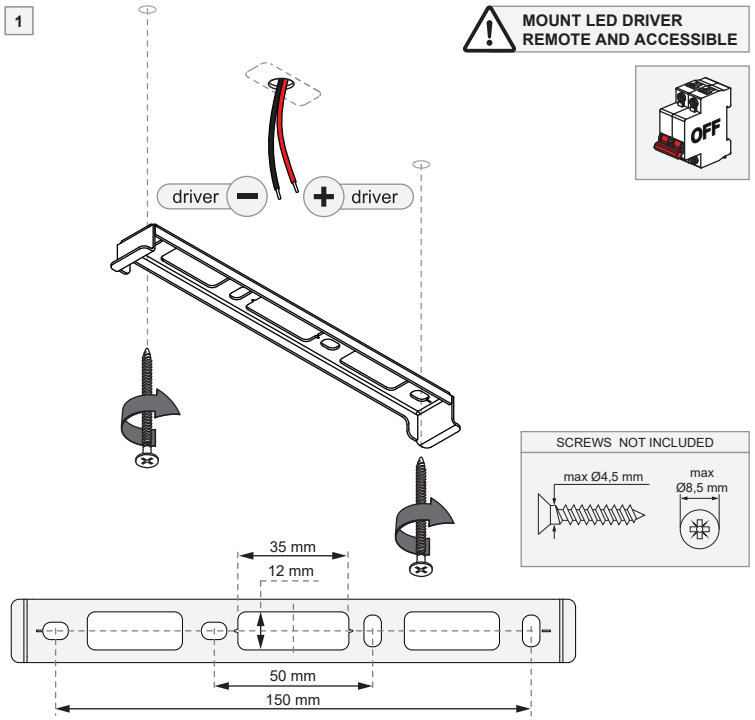

ELECTRICAL SPECS FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	30,8	37,6	12
500	31,6	38,8	17,6
700	33	40,2	25,6
RED		BLACK	


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.



Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

ELECTRICAL SPECS LED			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	15,4	18,8	6
500	15,8	19,4	8,8
700	16,5	20,1	12,8
RED		BLACK	


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

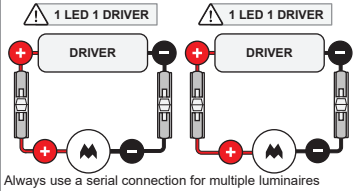


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

DRIVERS & ACCESSORIES	For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.


2

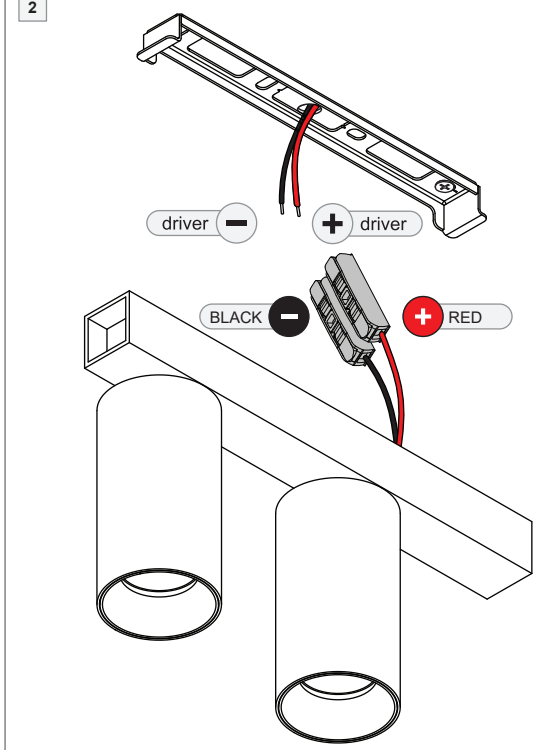


3

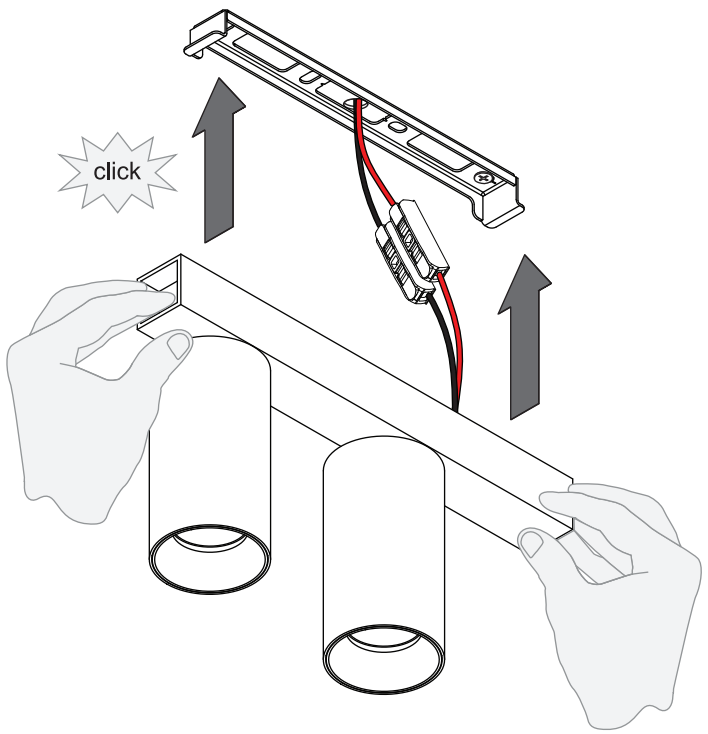

4

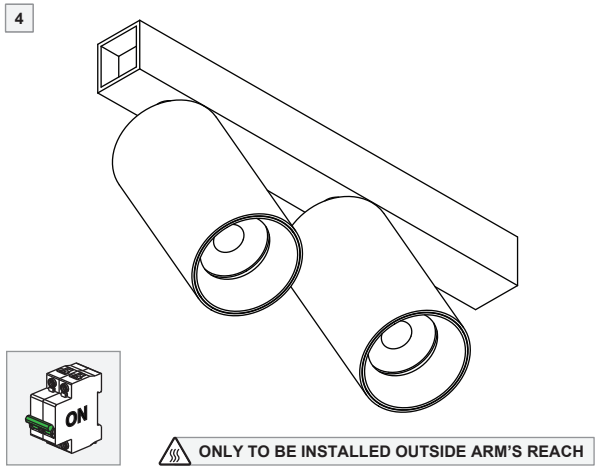

5 UNINSTALL

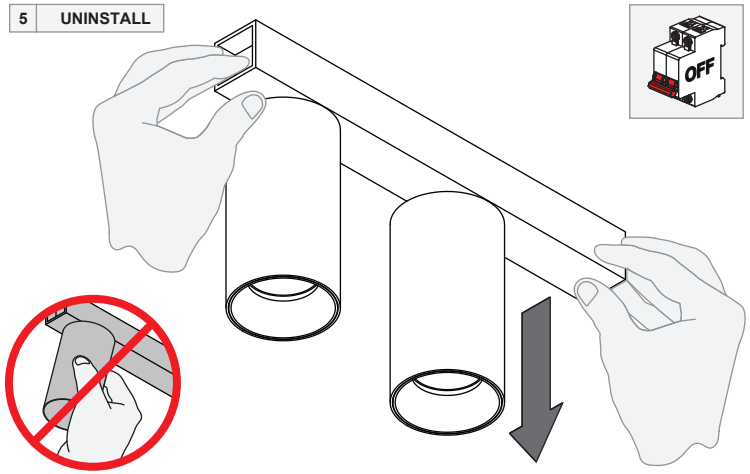

01 - 31/03/2025

III IP 20 UK CA CE