


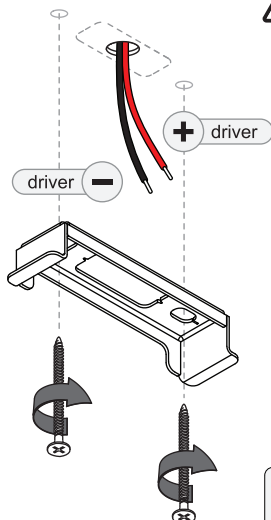


139511XX 139512XX 139513XX 139515XX 139516XX 139517XX


 **MOUNT LED DRIVER
REMOTE AND ACCESSIBLE**



ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	15,4	18,8	6
500	15,8	19,4	8,8
 RED		 BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			



! SERIAL CONNECTION:

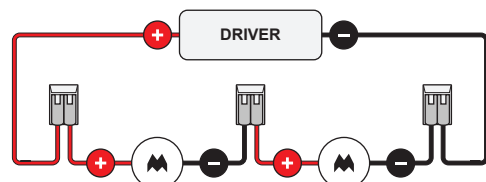


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!


DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.



2

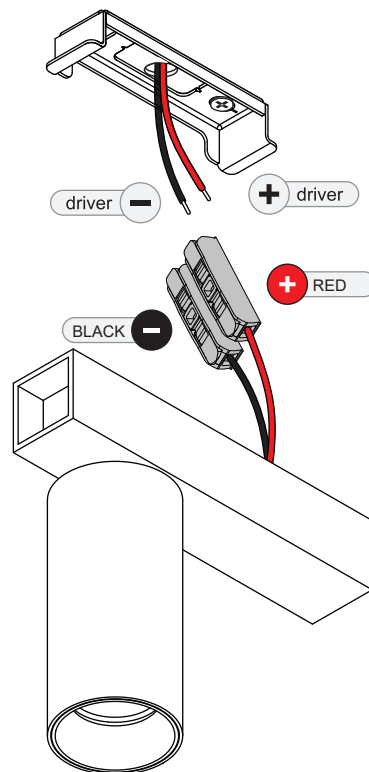

3

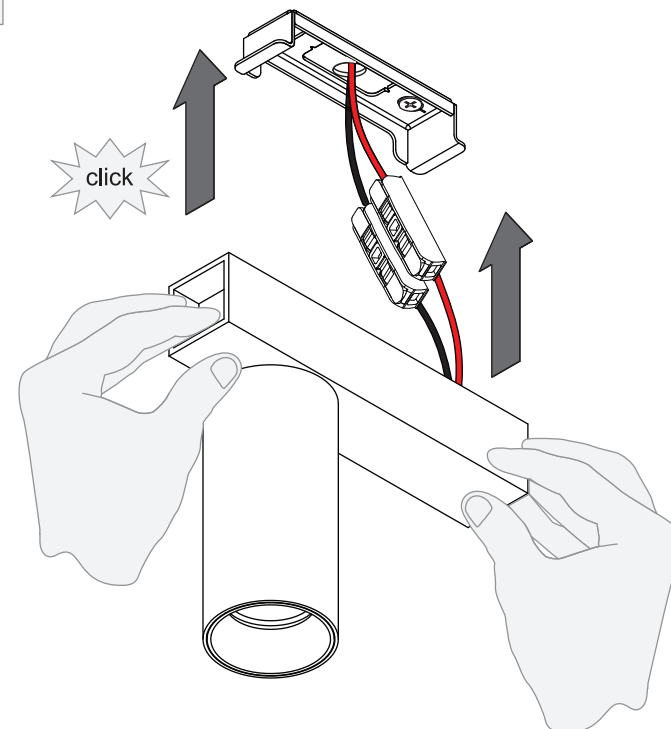

4

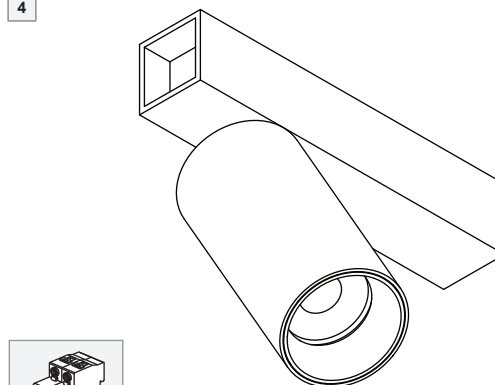

 **ONLY TO BE INSTALLED OUTSIDE ARM'S REACH**

5	UNINSTALL
---	-----------

