


139561XX\_139562XX\_139563XX\_139565XX\_139566XX\_139567XX

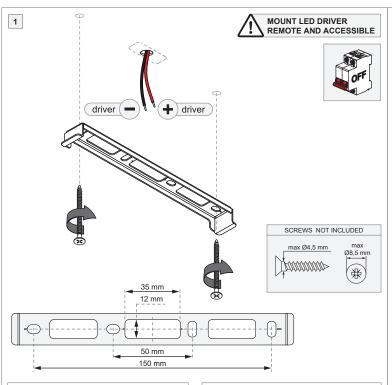



For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.



ways use a serial connection for multiple luminaires on a single driver!

Only use luminaires with the same input ratings!

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

**Drive Current** 

(mA)

350

500

O RED

1 LED 1 DRIVER

**ELECTRICAL SPECS LED** 

For serial connection, respect polarity! Not suited for connection to mains voltage.

Combine with a Modular LED-driver.

Always use a serial connection for multiple luminaires

on a single driver!

Only use luminaires with the same input ratings!

min (Vf)

15,4

15,8

Forward Voltage

max (Vf)

18,8

19,4

BLACK

1 LED 1 DRIVER

Power

(W)

6

8,8

