
Nyto Surface Adjustable 50 2x LED Super Spot DE


139580XX_139585XX

1

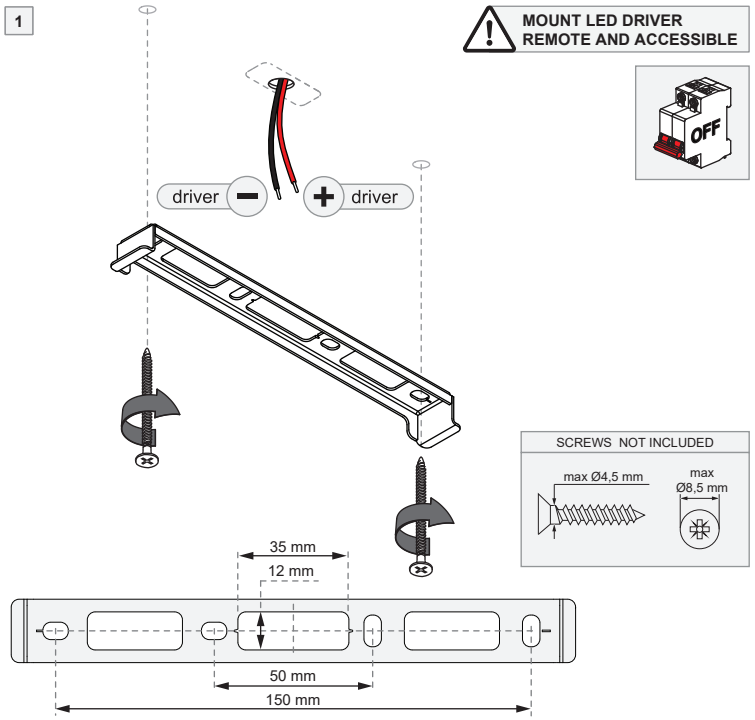

ELECTRICAL SPECS FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	22,8	24,4	8,2
500	23,8	25,4	12,2
700	24,8	26,4	17,8
RED		BLACK	


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.



Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

ELECTRICAL SPECS LED			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	11,4	12,2	4,1
500	11,9	12,7	6,1
700	12,4	13,2	8,9
RED		BLACK	


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

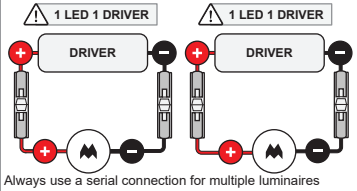


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

DRIVERS & ACCESSORIES	For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.


2

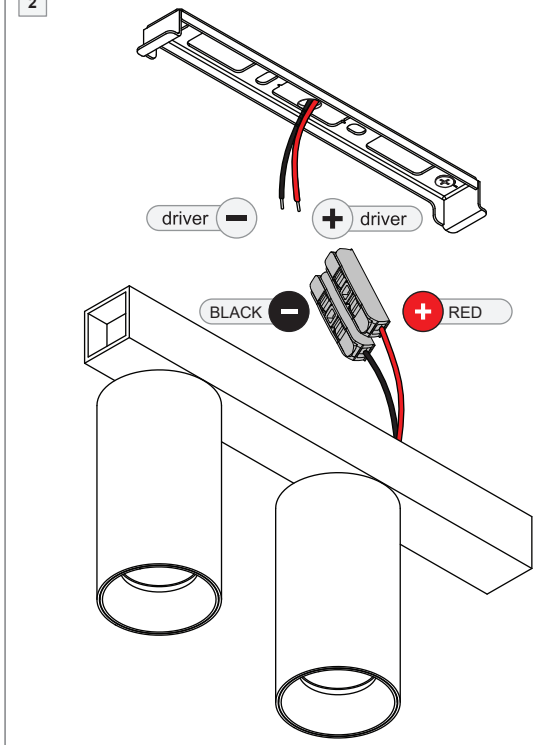


3

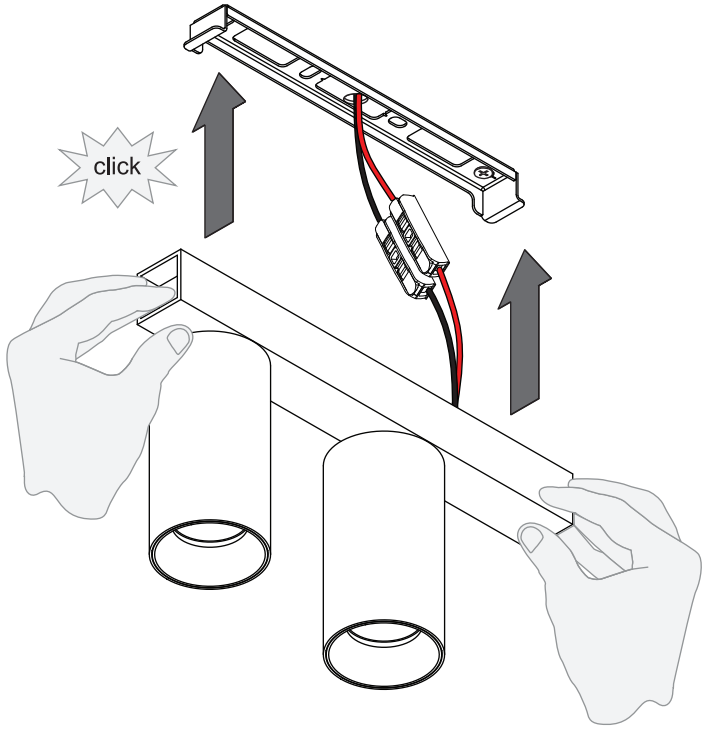

4

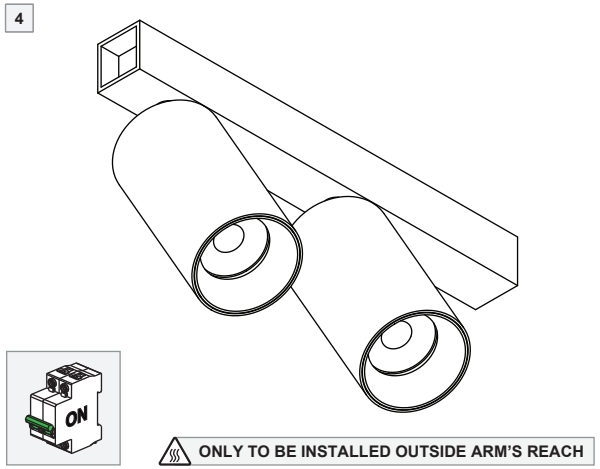

5 UNINSTALL

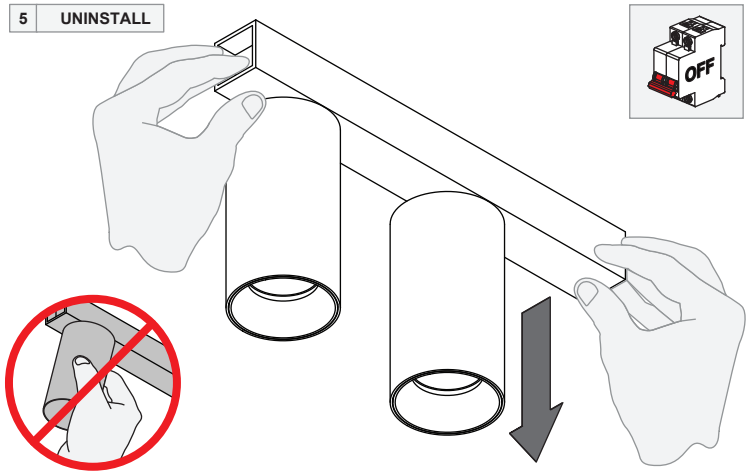

01 - 31/03/2025

III — IP 20 — UK CA — CE