

Nyto Surface Adjustable 50 1x LED 1800-3000K Flood DE


139545XX

1

MOUNT LED DRIVER REMOTE AND ACCESSIBLE

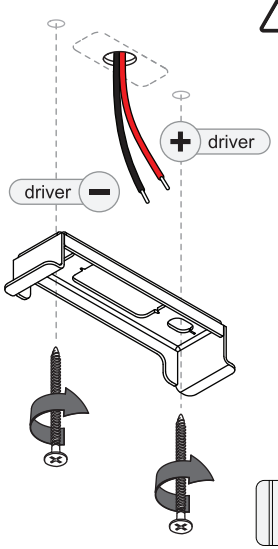






WARM DIM
ELECTRICAL SPECS LED-FIXTURE


Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
250	29,5	35,8	8,3
RED		BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

SCREWS NOT INCLUDED



SERIAL CONNECTION:

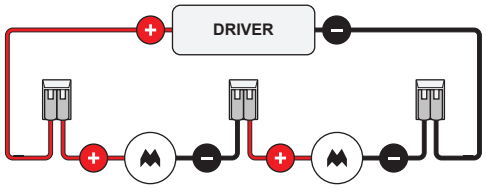


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!


DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.


2

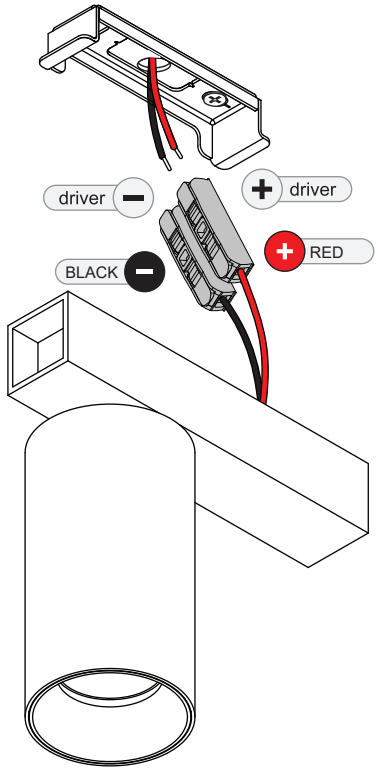


3

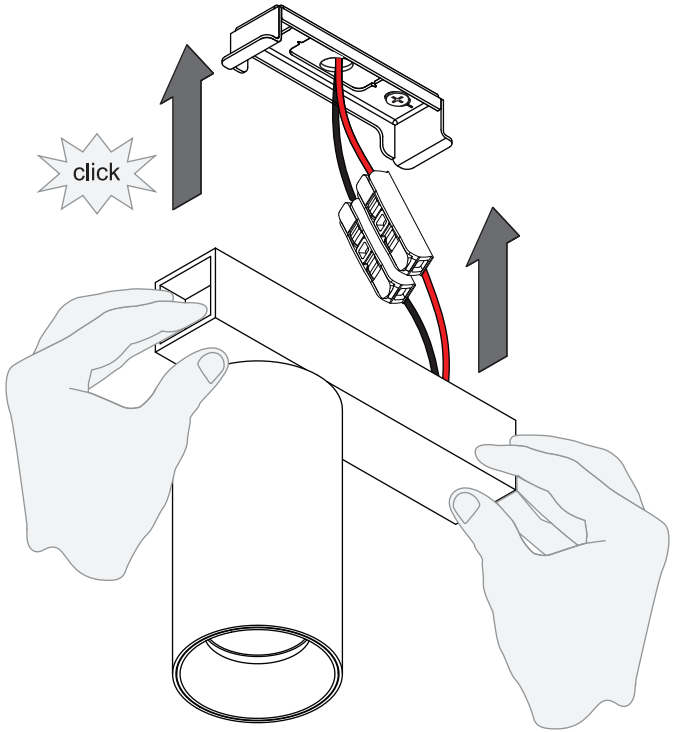


4

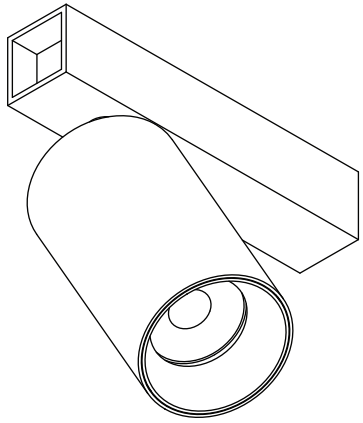



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

5 UNINSTALL

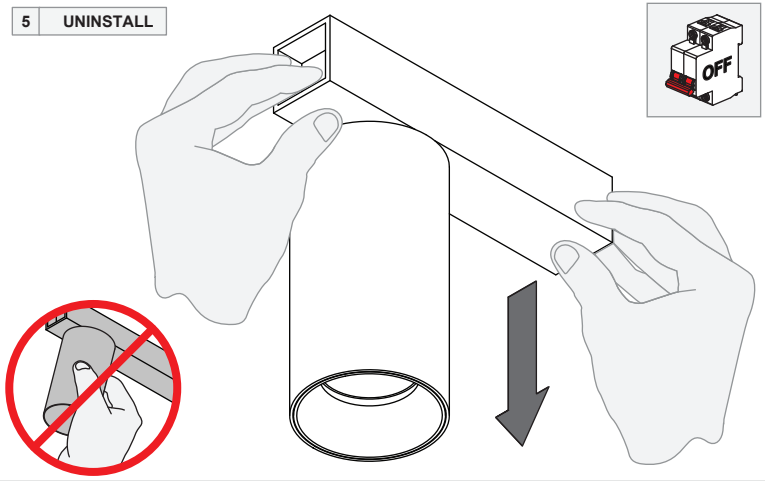

01 - 20/03/2025

III IP 20 UK CA CE