

Nyto Surface Adjustable 30 2x LED Spot DE

139550XX_139553XX


1


MOUNT LED DRIVER REMOTE AND ACCESSIBLE



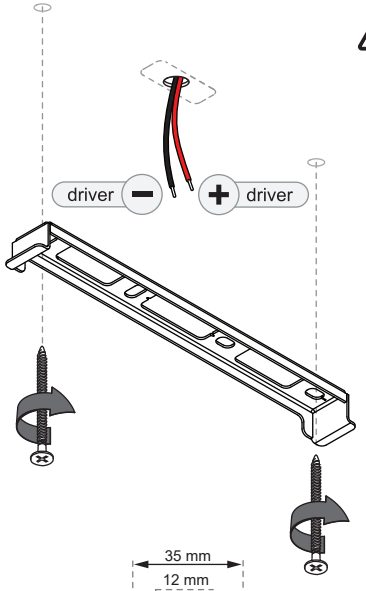

SCREWS NOT INCLUDED



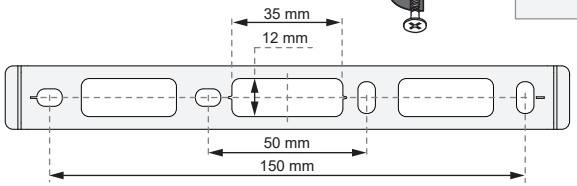

ELECTRICAL SPECS FIXTURE

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	22,8	24,4	8
RED		BLACK	


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

ELECTRICAL SPECS LED

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	11,4	12,2	4
RED		BLACK	


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

SERIAL CONNECTION 1 DRIVER



Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!


1 LED 1 DRIVER **1 LED 1 DRIVER**

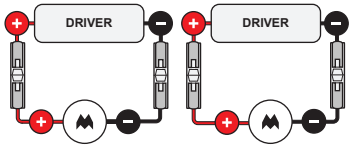


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

DRIVERS & ACCESSORIES	For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.


2

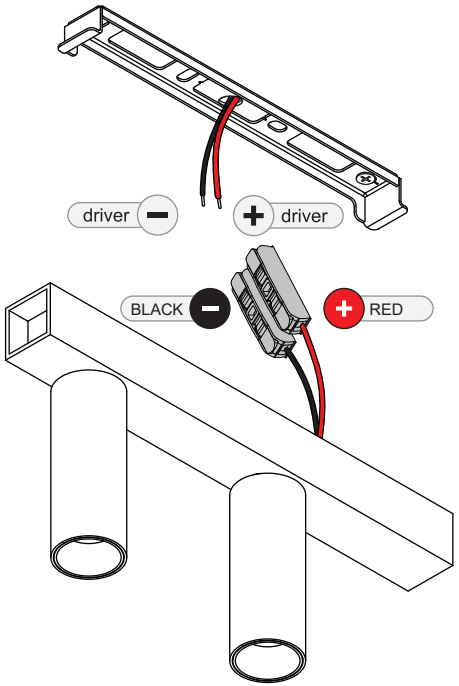


3

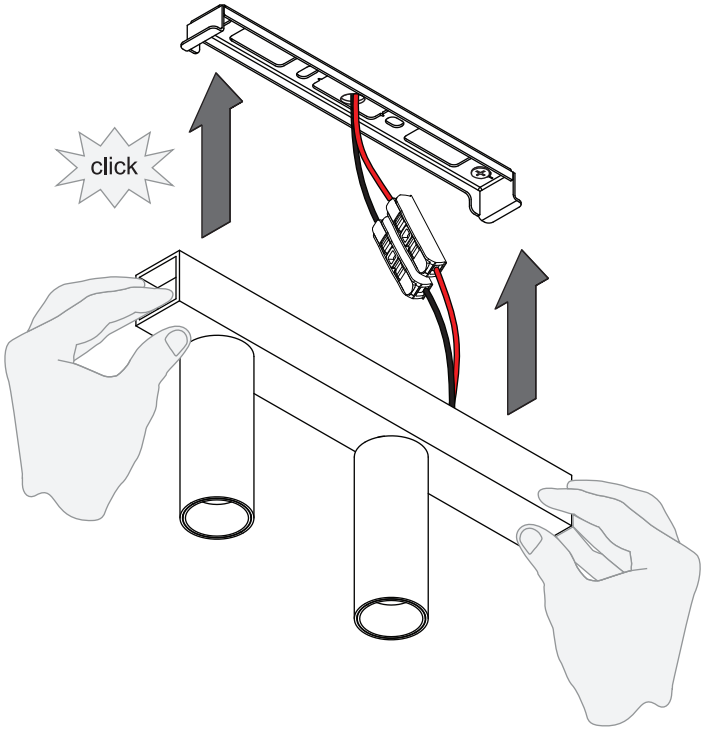


4

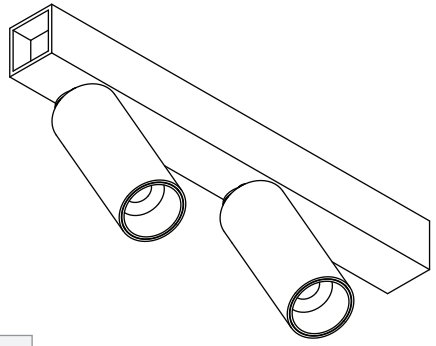



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

5 **UNINSTALL**

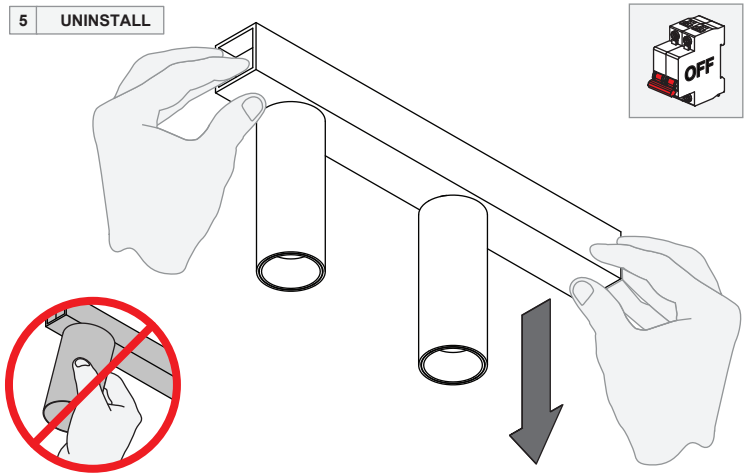

01 - 24/03/2025

III IP 20 UK CA CE