
Minude Surface Adjustable 45 1x LED Med DE

139401XX_139411XX

1

MOUNT LED DRIVER REMOTE AND ACCESSIBLE




ELECTRICAL SPECS LED-FIXTURE


Drive Current (mA)	Forward Voltage min (Vf)	Forward Voltage max (Vf)	Power (W)
350	14,8	18	4,1
500	15,2	18,6	6,1
RED		BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

SCREWS NOT INCLUDED



SERIAL CONNECTION:

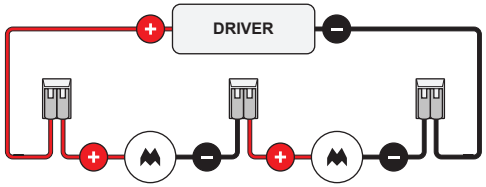


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!


DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.


2

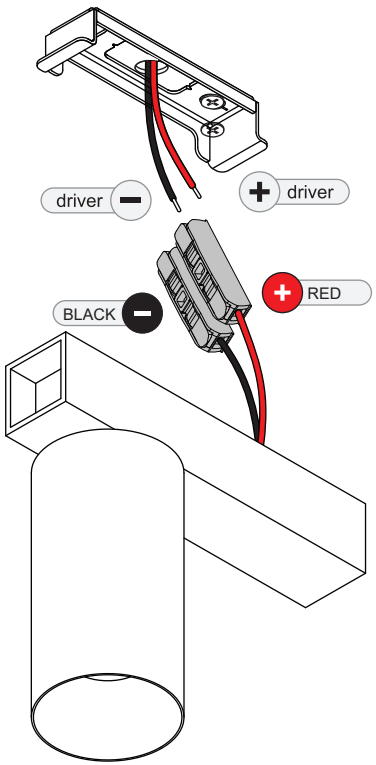


3

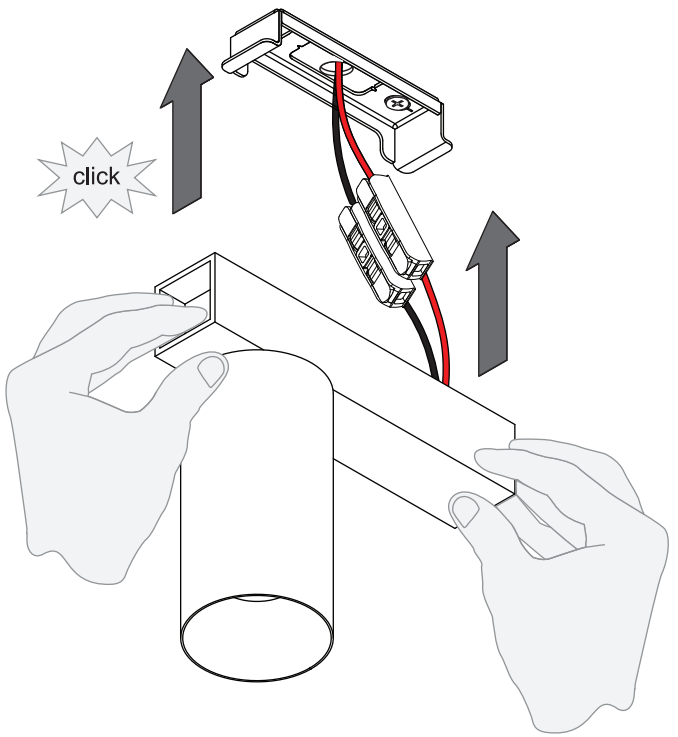


4

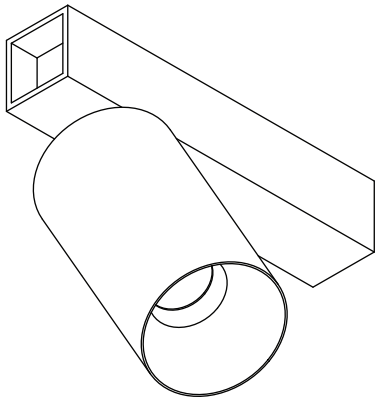



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

5 **UNINSTALL**

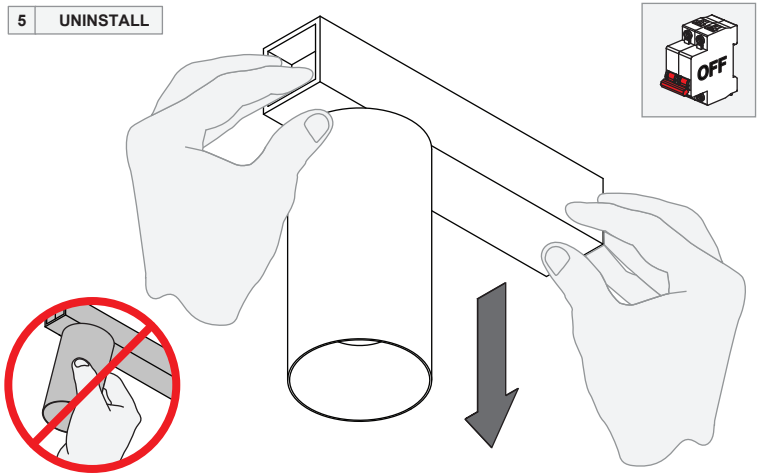

01 - 31/03/2025

III — IP 20 — UK CA — CE