

Nyto Surface Adjustable 40 1x LED 1800-3000K Flood DE


139522XX

1

MOUNT LED DRIVER REMOTE AND ACCESSIBLE

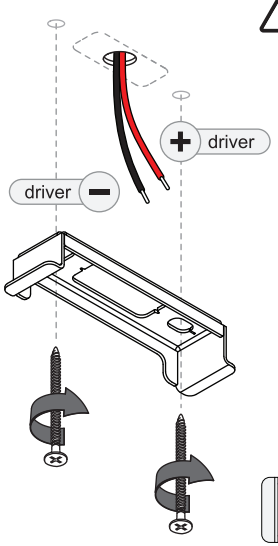






WARM DIM
ELECTRICAL SPECS LED-FIXTURE


Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
250	29,5	35,8	8,3
+ RED		− BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

SCREWS NOT INCLUDED



SERIAL CONNECTION:

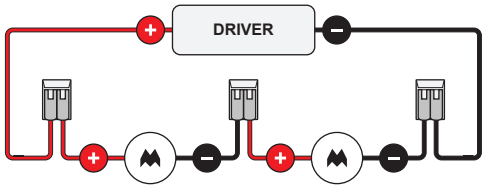


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!


DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.


2

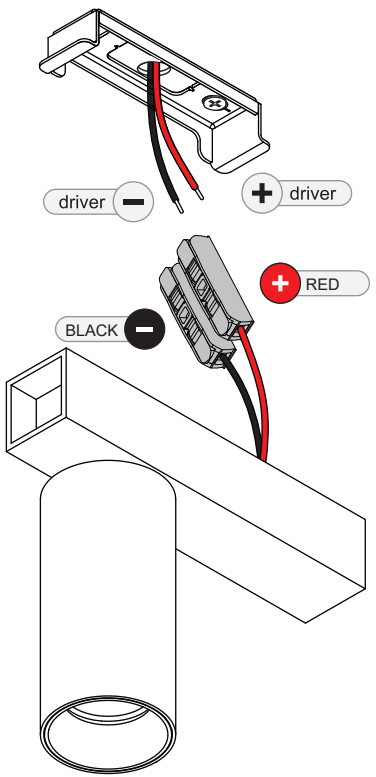


3

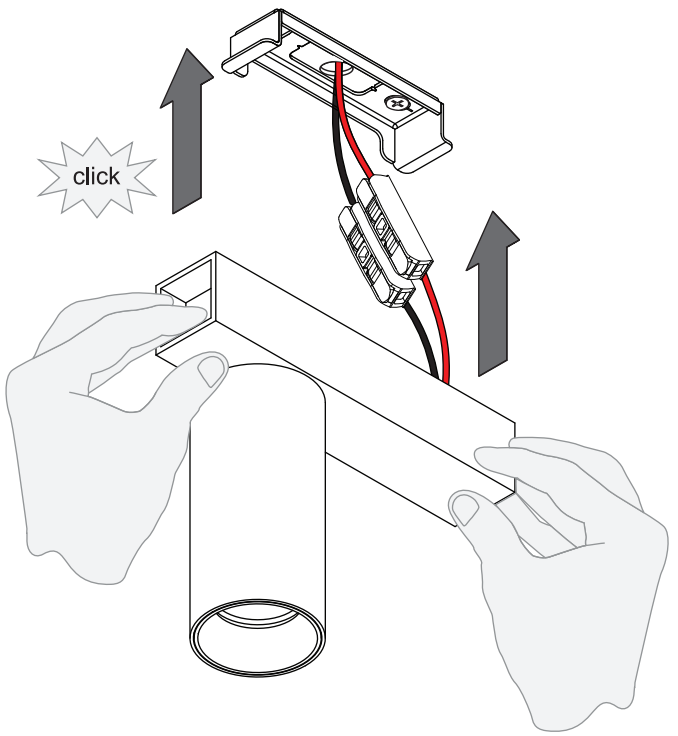


4

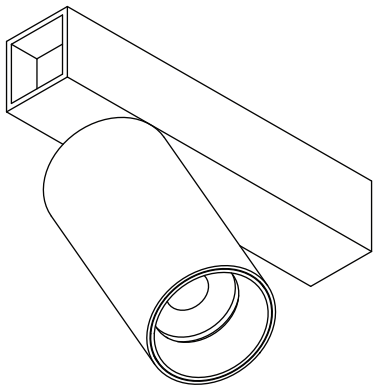



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

5 UNINSTALL

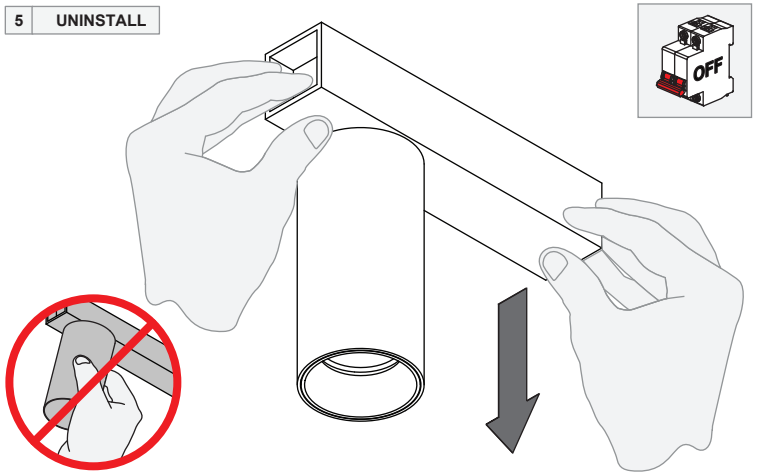

01 - 20/03/2025

III IP 20 UK CA CE