
Nyto Surface Adjustable 50 1x LED Spot DE

139531XX_139536XX

1

MOUNT LED DRIVER REMOTE AND ACCESSIBLE




ELECTRICAL SPECS LED-FIXTURE


Drive Current (mA)	Forward Voltage min (Vf)	Forward Voltage max (Vf)	Power (W)
350	15,4	18,8	6
500	15,8	19,4	8,8
700	16,5	20,1	12,8
RED		BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

SCREWS NOT INCLUDED



SERIAL CONNECTION:

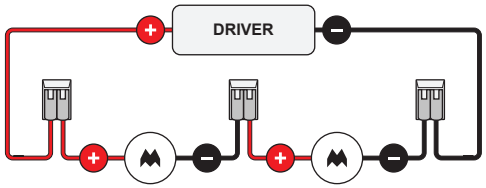


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!


DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.


2

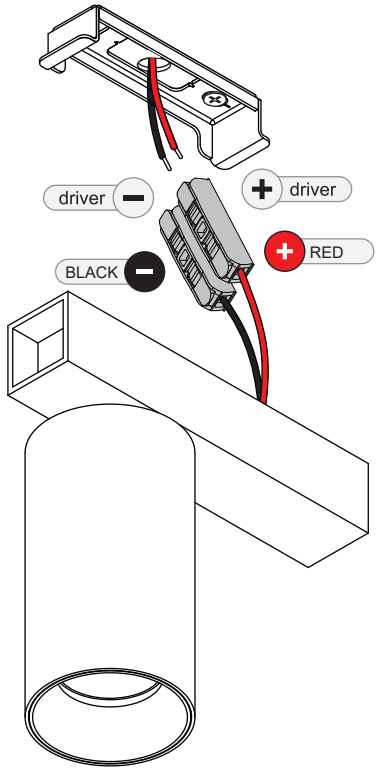


3

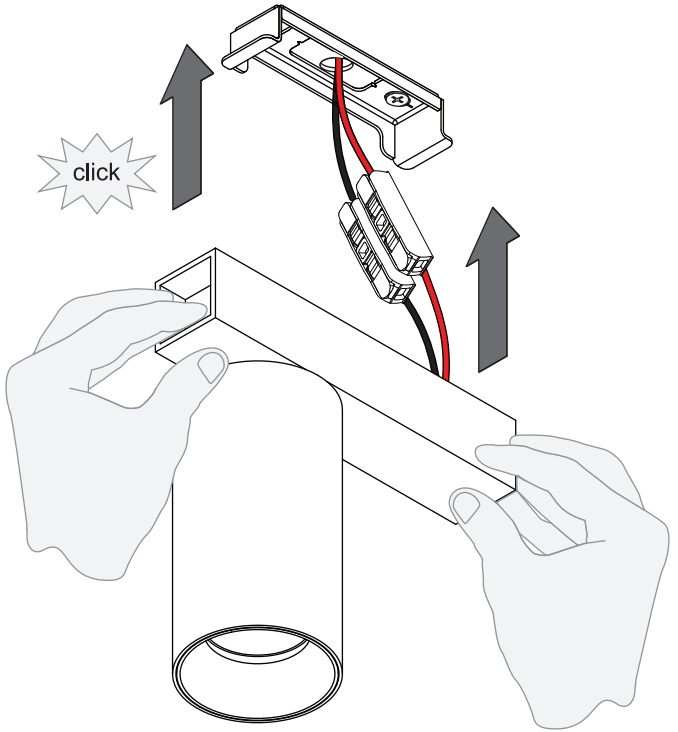


4

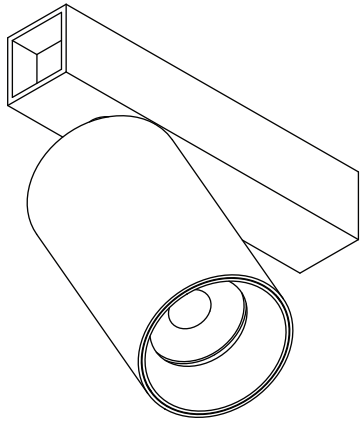



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

5 UNINSTALL

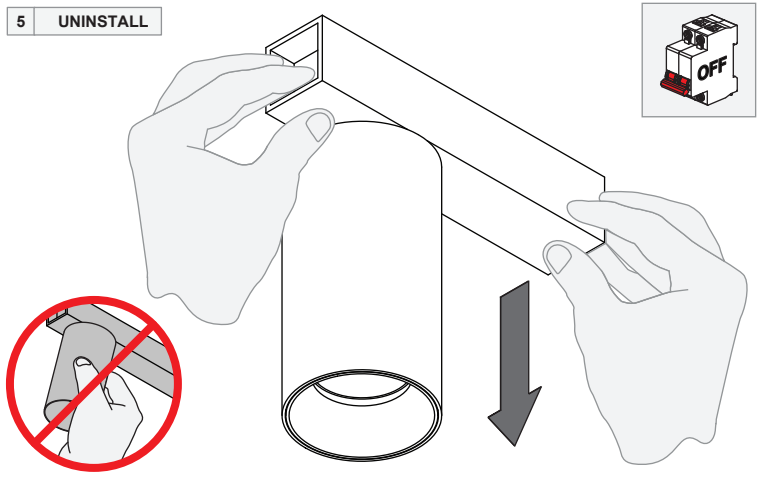

III IP 20 UK CA CE