

Nyto Surface Adjustable 50 1x LED Super Spot DE


139530XX_139535XX

1

MOUNT LED DRIVER REMOTE AND ACCESSIBLE

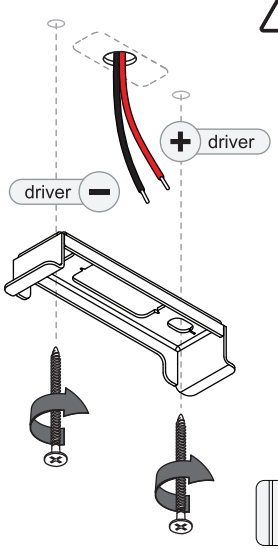







ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage min (Vf)	Forward Voltage max (Vf)	Power (W)
350	11,4	12,2	4,1
500	11,9	12,7	6,1
700	12,4	13,2	8,9
RED		BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

SCREWS NOT INCLUDED



SERIAL CONNECTION:

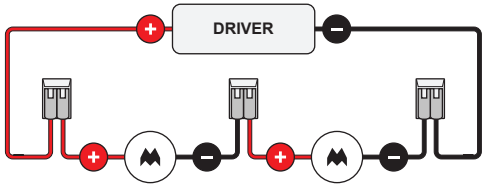


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!


DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.


2

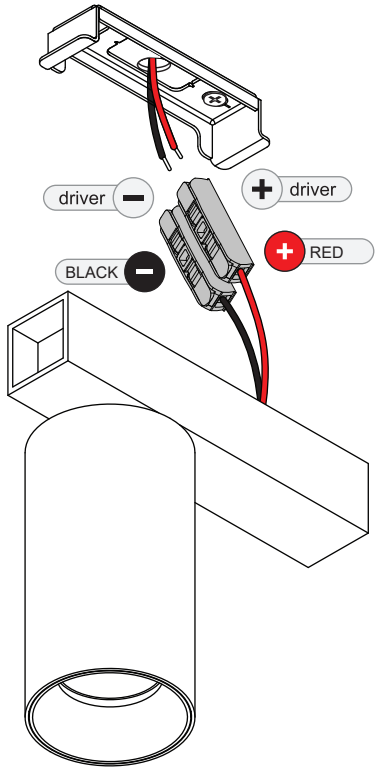


3

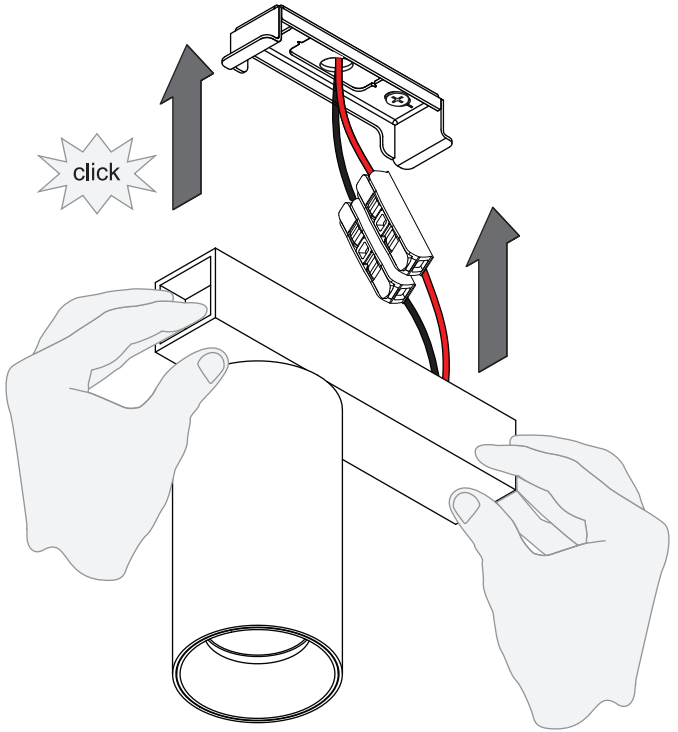


4

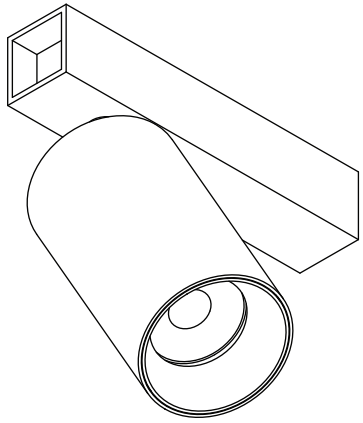



ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

5 **UNINSTALL**

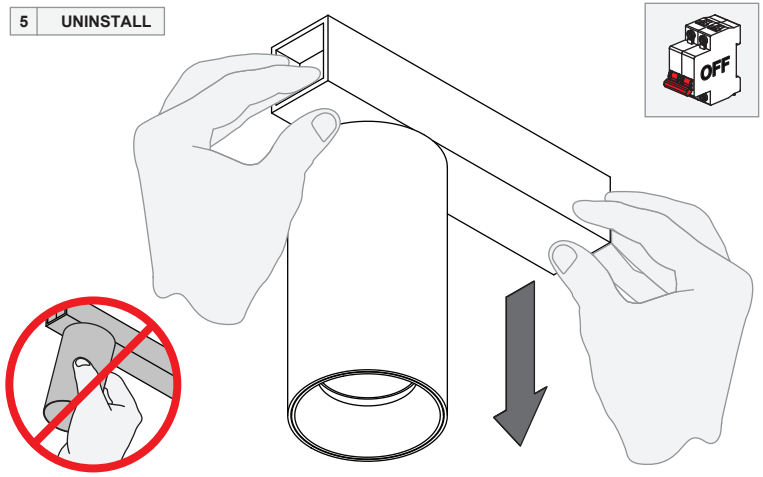

01 - 20/03/2025

III IP 20 UK CA CE