


Passage Jack Adjustable 40 1x LED 1800-3000K Flood DE

139708XX

1.1 INSTALLATION: COMPONENTS

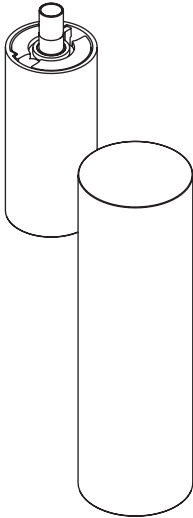



WARM DIM

ELECTRICAL SPECS LED-FIXTURE



Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
250	29,5	35,8	8,3
+ RED		- BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.



1.2 INSTALLATION: PLUG IN "MODUPOINT LED"

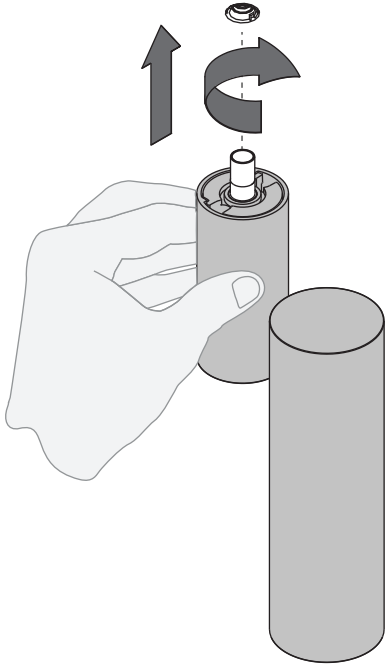


1.3 INSTALLATION: POWER ON

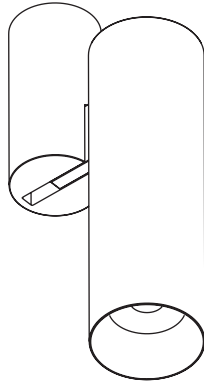

2.1 UNINSTALL

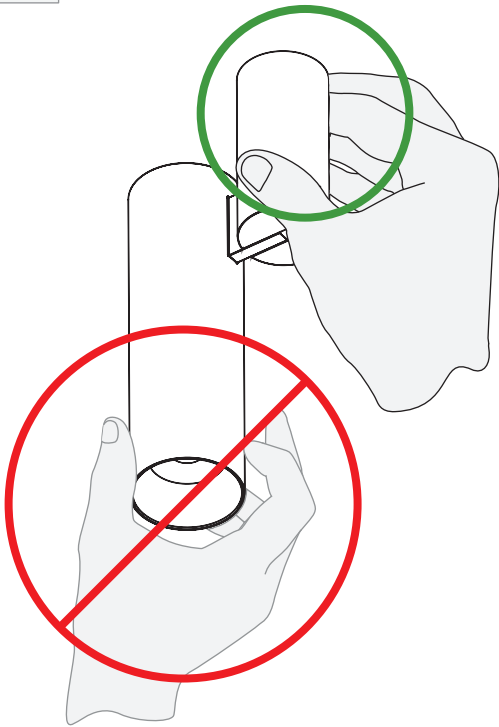

2.2 UNINSTALL

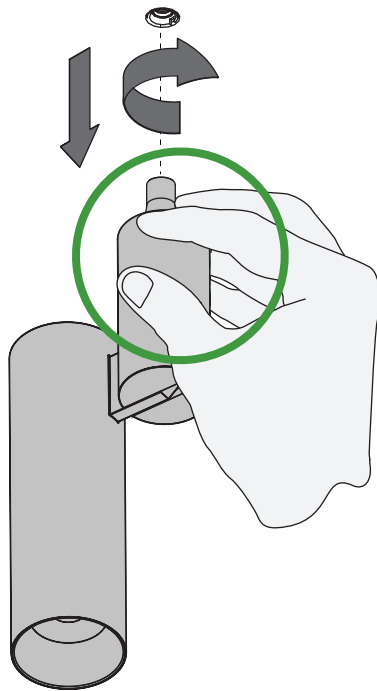

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source.
The light source and/or driver contained in this luminaire shall only be replaced
by the manufacturer or his service agent or a similar qualified person.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check
www.supermodular.com or connect with your sales contact.