

LED Driver Constant Voltage 48V In-Track 100W


13457309, 13457332, 13457409, 13457432

WIRING DIAGRAM

NON-DIM

DALI/1-10V

DIMENSIONS

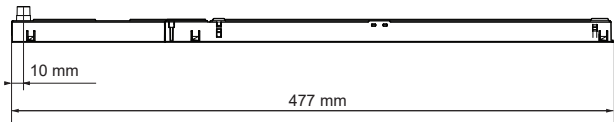

INSTALLATION

For installation of the driver in the Pista Track 48V system, please read the installation instruction.

ELECTRICAL CHARACTERISTICS

- NOMINAL INPUT VOLTAGE RANGE AC
220 - 240V
- INPUT FREQUENCY RANGE
50...60HZ
- OUTPUT VOLTAGE
48V
- DC OPERATING RANGE
None
- MAXIMUM OUTPUT POWER
100W
- TEMPERATURE
Tc = 80°C
Ta = -25...+50°C
- EFFICIENCY AT FULL LOAD
>92%
- MAXIMUM DRIVERS ON MCB 16A TYPE B
8

Technical datasheet available on request

FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

