




Nyto Surface Adjustable 50 Round 1x LED DE


139922XX_139923XX_139924XX_139927XX_139928XX_139929XX

1

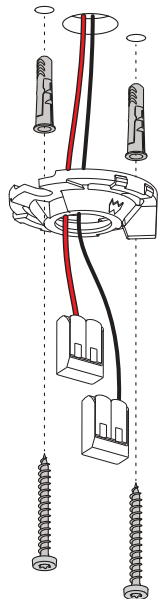


ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	15,4	18,8	6
500	15,8	19,4	8,8
700	16,5	20,1	12,8
900	17	20,8	17
+ RED		- BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

CUT-OUT HOLES

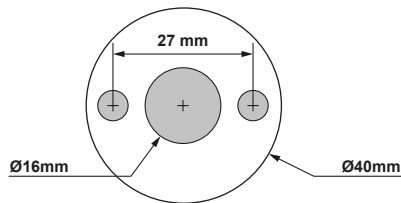


2

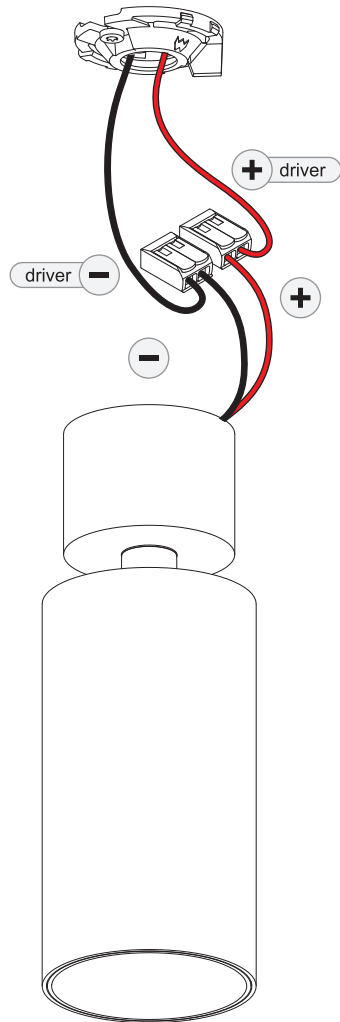


 ONLY TO BE INSTALLED OUTSIDE ARM'S REACH

3


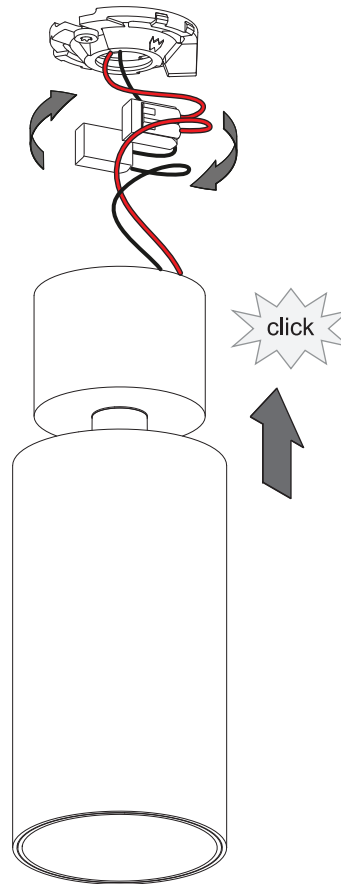


 SERIAL CONNECTION:

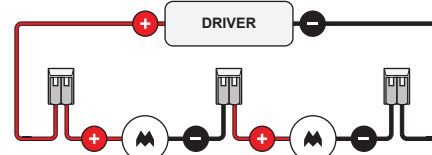

Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

4

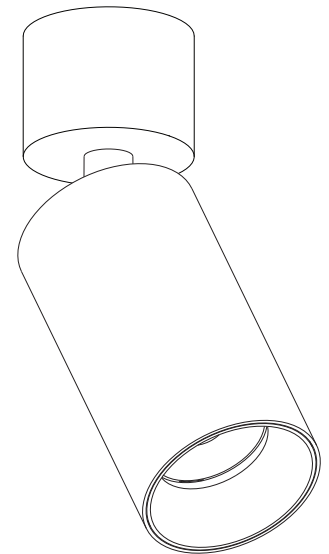

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

SERVICEABLE COMPONENTS & ACCESSORIES

For latest version of available accessories or serviceable components check www.supermodular.com or connect with your sales contact.