


Kleivr Recessed 72 1x IP55 LED 1800-3000K Flood DE

140016XX

1

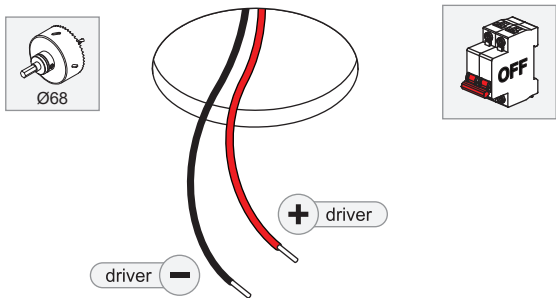


WARM DIM			
ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
250	29,5	35,8	8,3
+ RED		- BLACK	
For serial connection only! Respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			


Minimum volume requirements

Without driver:


In false ceiling:

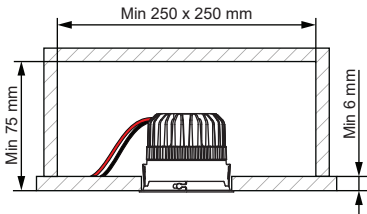


In concrete:





With driver:


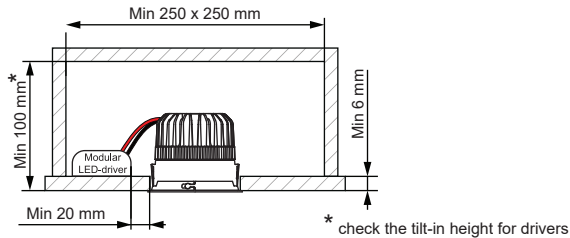


2

IP20	wago connectors included  11mm 0,2 - 4mm² 24 - 12 AWG
IP55	waterproof connectors not included Modular reference number : 1000385  15mm

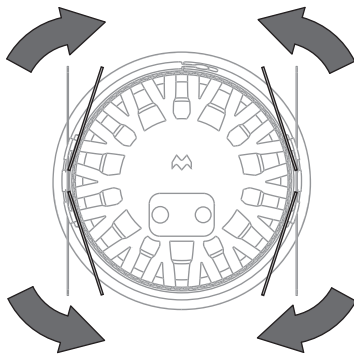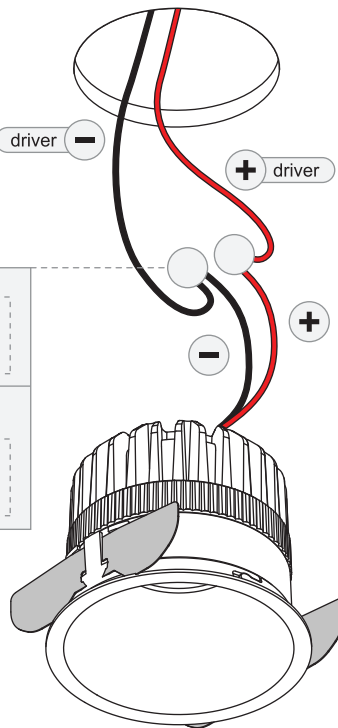

3



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1016400



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

