


Kup Recessed 72 1x IP55 LED DE

142804XX_142805XX_142806XX_142807XX_142808XX_142809XX_142810XX_142811XX_142812XX_142813XX_142814XX_142815XX_142817XX_142818XX_142819XX_142820XX

1

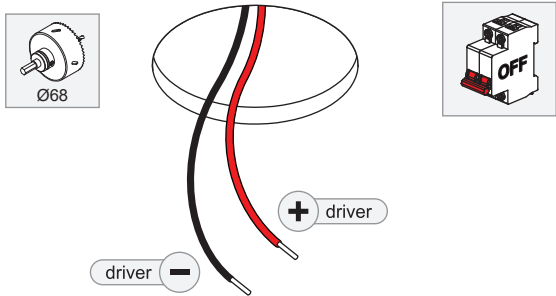


ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	10,4	12,7	4,1
500	10,8	13,2	6,1
700	11,4	13,7	8,8
 RED		 BLACK	
For serial connection only! Respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			


Minimum volume requirement



With driver in false ceiling:


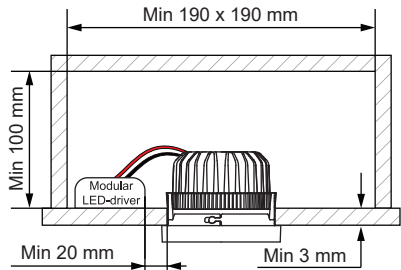


In concrete:


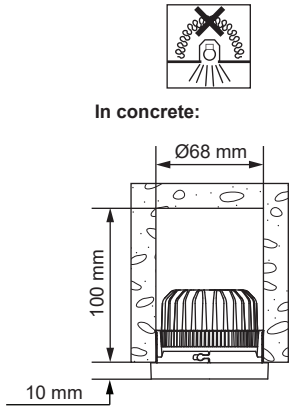


2

IP20	wago connectors included
IP55	waterproof connectors not included Modular reference number : 1000373

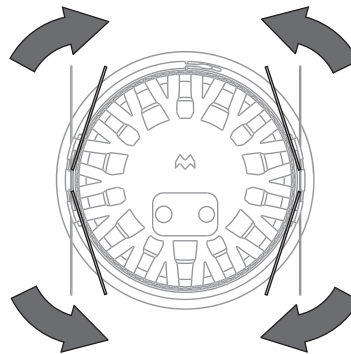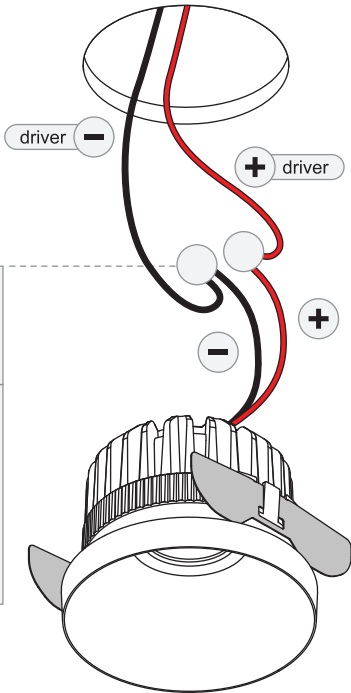

3



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number:
SPOT - 1016714
MEDIUM - 1016383
FLOOD - 1016384
WIDE FLOOD - 1016385

LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES
For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.