
# Kup Recessed 72 1x IP55 LED Super Spot DE

142800XX_142801XX_142802XX_142803XX

**1**

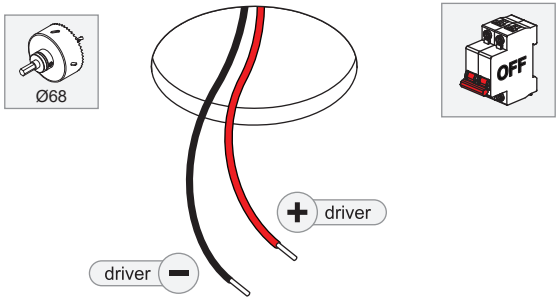



| ELECTRICAL SPECS LED-FIXTURE | | | |
|---|---|---|---|
| **Drive Current (mA)** | **Forward Voltage** | | **Power (W)** |
| | **min (Vf)** | **max (Vf)** | |
| 350 | 10,7 | 12,6 | 4 |
| 500 | 10,9 | 12,8 | 5,8 |
| 700 | 11,2 | 13,1 | 8,3 |
| RED | | BLACK | |
| For serial connection only! Respect polarity!<br>Not suited for connection to mains voltage.<br>Combine with a Modular LED-driver. | | | |

**Minimum volume requirement**




**With driver in false ceiling:**

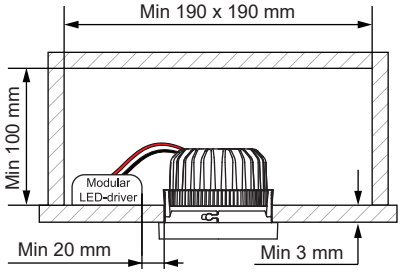






**In concrete:**





**2**

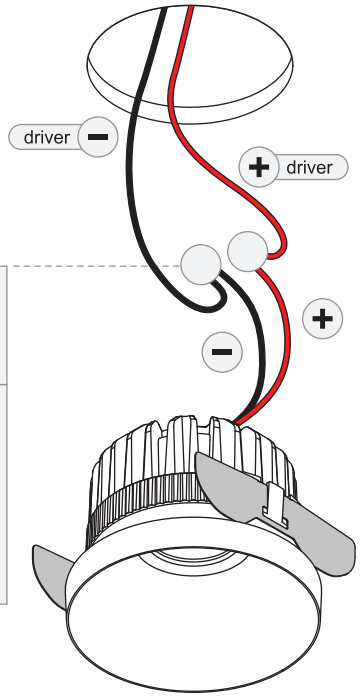




| | |
|---|---|
| IP20 | wago connectors included  |
| IP55 | waterproof connectors not included<br>Modular reference number :<br>1000373 <br> |

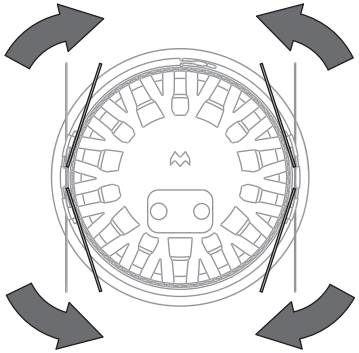

**3**





Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1016382



**LIGHT SOURCE - DO NOT TOUCH LED**

Touching the LED can result in permanent damage of the light source.The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.




**PREVENTING ELECTROSTATIC DAMAGE**

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

**DRIVERS & ACCESSORIES**

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

