MODULAR
LIGHTING
INSTRUMENTS
— by MLI NA Corporation

| | |
|---|---|
| Project | |
| Type | |
| Contact | |

# *Straw 60 Suspended*

## *Overview*

Straw is the dawn of a new era in linear lighting. A distinctive line that hides all its secrets but that reveals gentle curves. It was designed with a new kind of workspace in mind, one that flirts modern styles, technology and flexibility all at once. And yet, it's so easy to imagine Straw in many other settings… Why not try them all? If you truly want versatility, you have to try Straw's surprising rotation system. Turn the tube of Straw to control the light effect. Strong downlight, mysterious wall washer or indirect uplight. Create a different ambience for the specific purpose of your space.

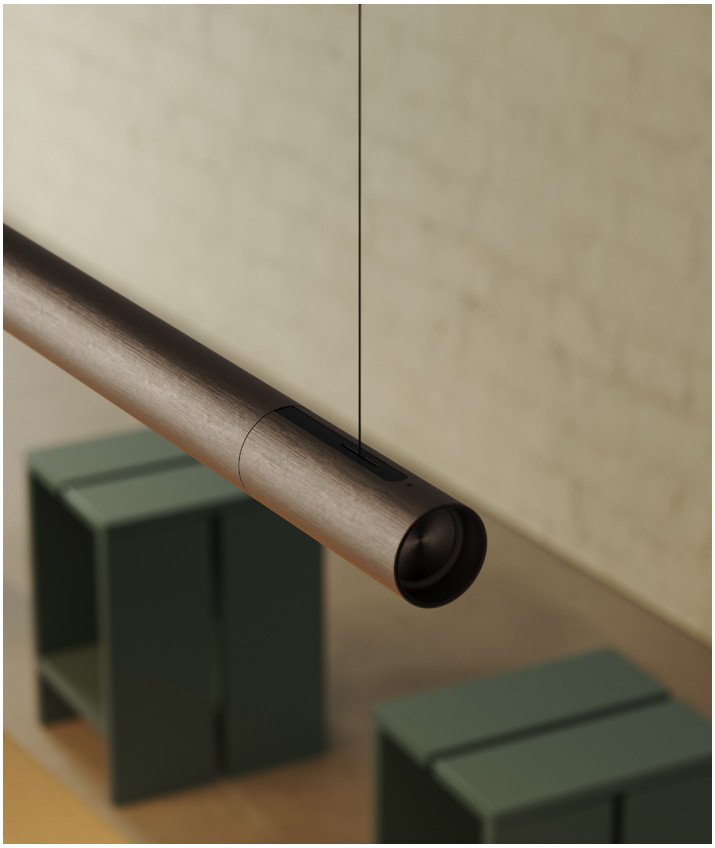

**QUICK LINKS**


Page 2 General Information

Page 4 Profiles (length: 49.6")

Page 8 Profiles (length: 71.6")

Page 12 Blind Profiles

Page 13 Endplates

Page 14 Connections

Page 15 Accessories

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

# *Straw 60 Suspended*

## *General Information*

- Modular luminaire with linear base components and made-to-measure blind profiles for longer run lengths
- Sleek tubular design, tube diameter: 2.36”
- Dry locations only
- Shop drawing is required for all projects
- Each profile / project is made to order
- Number of suspension kits: one required for each endplate or connection module

### Electrical

- Light source type: LED
- Driver: included in the light module
- Input power: 120-277VAC - 50/60Hz
- Dimming: 0-10V or DALI (specified separately in the light module)
- 0-10V dimming: all light modules (up and down), including adjacent modules along the run, are controlled together as a single channel
- DALI-2 dimming: up and down light modules within each profile, as well as adjacent modules along the run, can be independently addressed and controlled

## Finish Information

Black Structure (BLS)
Powder Coat (Matte)

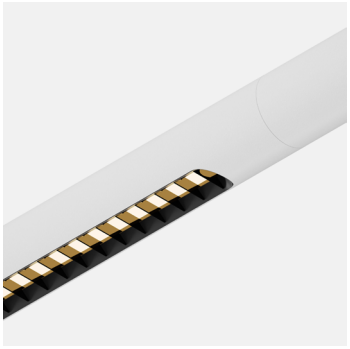

White Structure (WHS)
Powder Coat (Matte)

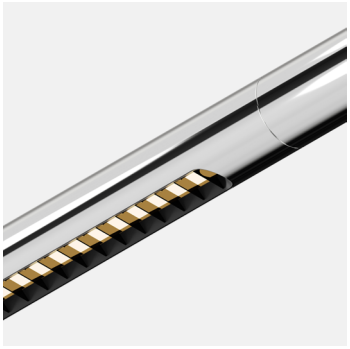

Aluminum Polished (ALPO)
Raw polished (Glossy)

Black (BLBA)
Anodised (Brushed)

Bronze (BRBA)
Anodised (Brushed)

Champagne (CHBA)
Anodised (Brushed)

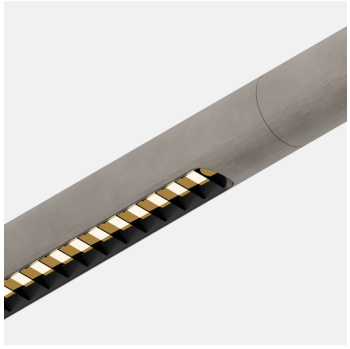

Silver Bronze (SBBA)
Anodised (Brushed)

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Components & Configuration*

- See following pages for detailed component and ordering information

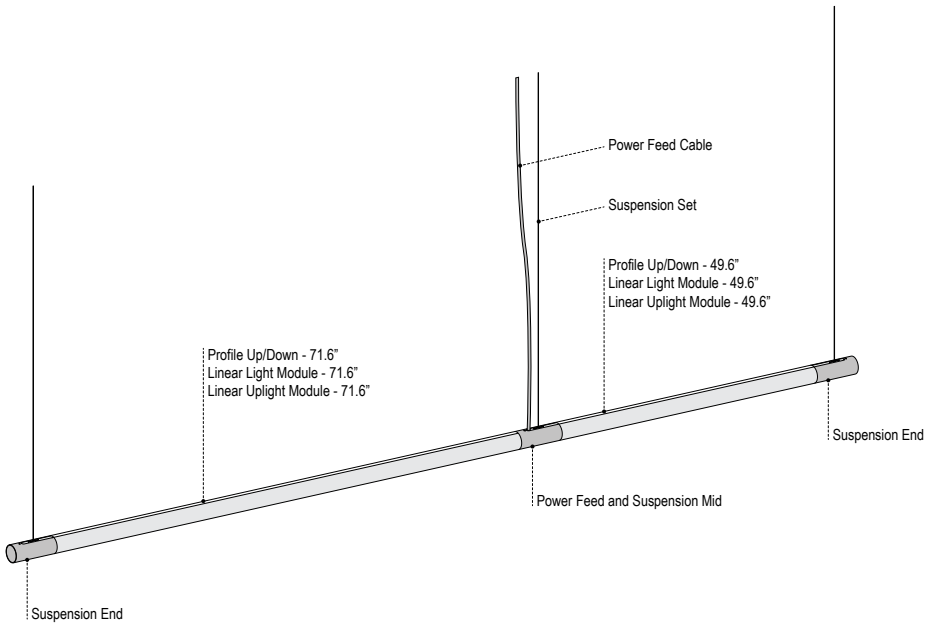


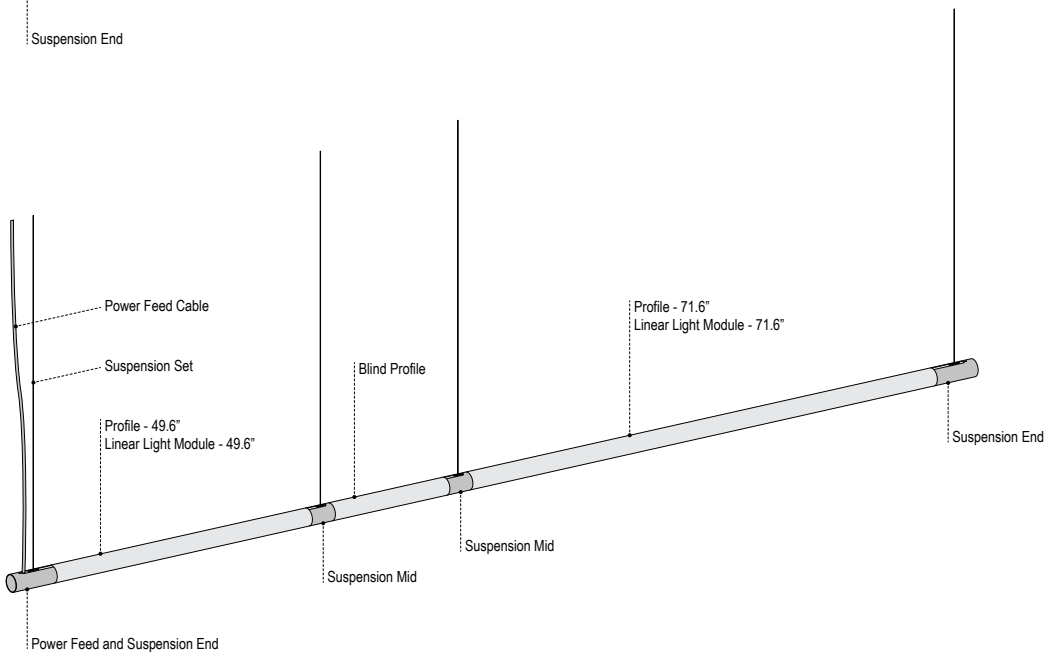


clear form

## *Profiles (length: 49.6”)*

- Base profile for one or two linear light modules
- Length: 49.6”
- Adjustability: 360°
- Material: aluminum
- Finish: powder coat, anodisation or polishing
- Must be combined with linear light module (specify on pages 5 - 6)
- Up/Down version must additionally be combined with linear uplight module (specify on page 7)
- Profiles connect electrically and mechanically to the endplate or connection module via click-in connections
- Maximum amount of profiles to be connected, when no modules with uplight are connected: 14 pcs
- Maximum amount of profiles to be connected, when at least one uplight module is connected: 7 pcs

Profile - 49.6” (White Structure)

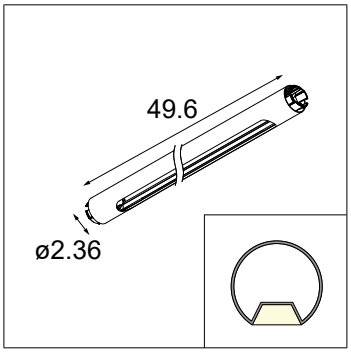


Profile - 49.6”

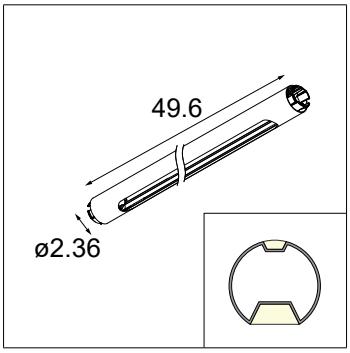


Profile Up/Down - 49.6”

### Specifications & Ordering Information

| Ordering Code | Version | Finish |
|---|---|---|
| STRAW60-PROF-49.6-BLS | Profile - 49.6" | Black Structure |
| STRAW60-PROF-49.6-WHS | Profile - 49.6" | White Structure |
| STRAW60-PROF-49.6-ALPO | Profile - 49.6" | Aluminum Polished |
| STRAW60-PROF-49.6-BLBA | Profile - 49.6" | Black Brushed Anodised |
| STRAW60-PROF-49.6-BRBA | Profile - 49.6" | Bronze Brushed Anodised |
| STRAW60-PROF-49.6-CHBA | Profile - 49.6" | Champagne Brushed Anodised |
| STRAW60-PROF-49.6-SBBA | Profile - 49.6" | Silver Bronze Brushed Anodised |
| STRAW60-PROF-UD-49.6-BLS | Profile Up/Down - 49.6" | Black Structure |
| STRAW60-PROF-UD-49.6-WHS | Profile Up/Down - 49.6" | White Structure |
| STRAW60-PROF-UD-49.6-ALPO | Profile Up/Down - 49.6" | Aluminum Polished |
| STRAW60-PROF-UD-49.6-BLBA | Profile Up/Down - 49.6" | Black Brushed Anodised |
| STRAW60-PROF-UD-49.6-BRBA | Profile Up/Down - 49.6" | Bronze Brushed Anodised |
| STRAW60-PROF-UD-49.6-CHBA | Profile Up/Down - 49.6" | Champagne Brushed Anodised |
| STRAW60-PROF-UD-49.6-SBBA | Profile Up/Down - 49.6" | Silver Bronze Brushed Anodised |

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Linear Light Modules (for Profile length 49.6")*

- Linear light module for base profile
- Factory-mounted in the base profile
- Provided with frosted diffuser, optionally available with batwing diffuser and/or glare control grid
- Trim finish: matte black
- Glare control grid finish: black chrome
- CRI: >90, R9: >50
- Lifetime: L95 B05 @ 50.000 hrs
- UGR & photometric files: see website

Linear / Linear Batwing

Linear Grid / Linear Batwing Grid

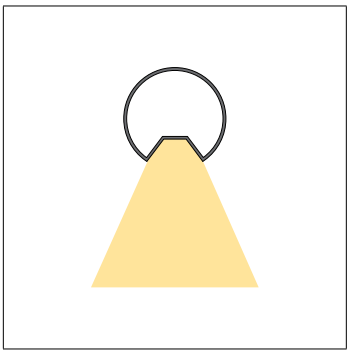

Linear

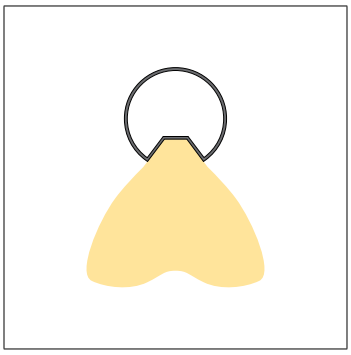

Linear Batwing

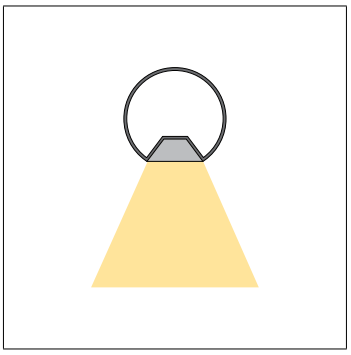

Linear Grid

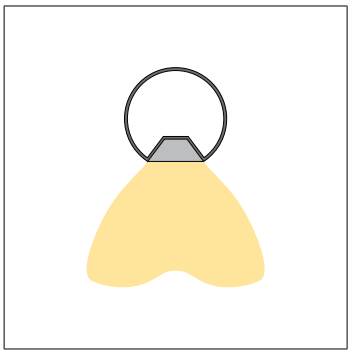

Linear Batwing Grid

### Linear - 49.6" - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LIN-49.6-27-0101-ELDO-BLMT | 0-10V - 1% | 2700K | 4066lm | 37.3W | C0: 60° / C90: 101° |
| STRAW60-LIN-49.6-30-0101-ELDO-BLMT | 0-10V - 1% | 3000K | 4290lm | 37.3W | C0: 60° / C90: 101° |
| STRAW60-LIN-49.6-35-0101-ELDO-BLMT | 0-10V - 1% | 3500K | 4225lm | 37.3W | C0: 60° / C90: 101° |
| STRAW60-LIN-49.6-27-D1-ELDO-BLMT | DALI-2 - 1% | 2700K | 4066lm | 37.3W | C0: 60° / C90: 101° |
| STRAW60-LIN-49.6-30-D1-ELDO-BLMT | DALI-2 - 1% | 3000K | 4290lm | 37.3W | C0: 60° / C90: 101° |
| STRAW60-LIN-49.6-35-D1-ELDO-BLMT | DALI-2 - 1% | 3500K | 4225lm | 37.3W | C0: 60° / C90: 101° |

[1] Consult the factory for dimmer compatibility
[2] Output shows the delivered lumens

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## Linear Batwing - 49.6" - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LINBW-49.6-27-0101-ELDO-BLMT | 0-10V - 1% | 2700K | 3498lm | 37.3W | C0: 86° / C90: 104° |
| STRAW60-LINBW-49.6-30-0101-ELDO-BLMT | 0-10V - 1% | 3000K | 3691lm | 37.3W | C0: 86° / C90: 104° |
| STRAW60-LINBW-49.6-35-0101-ELDO-BLMT | 0-10V - 1% | 3500K | 3635lm | 37.3W | C0: 86° / C90: 104° |
| STRAW60-LINBW-49.6-27-D1-ELDO-BLMT | DALI-2 - 1% | 2700K | 3498lm | 37.3W | C0: 86° / C90: 104° |
| STRAW60-LINBW-49.6-30-D1-ELDO-BLMT | DALI-2 - 1% | 3000K | 3691lm | 37.3W | C0: 86° / C90: 104° |
| STRAW60-LINBW-49.6-35-D1-ELDO-BLMT | DALI-2 - 1% | 3500K | 3635lm | 37.3W | C0: 86° / C90: 104° |

(1) Consult the factory for dimmer compatibility
(2) Output shows the delivered lumens

## Linear Grid - 49.6" - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LINGR-49.6-27-0101-ELDO-BLMT | 0-10V - 1% | 2700K | 3202lm | 37.3W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-30-0101-ELDO-BLMT | 0-10V - 1% | 3000K | 3378lm | 37.3W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-35-0101-ELDO-BLMT | 0-10V - 1% | 3500K | 3327lm | 37.3W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-27-D1-ELDO-BLMT | DALI-2 - 1% | 2700K | 3202lm | 37.3W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-30-D1-ELDO-BLMT | DALI-2 - 1% | 3000K | 3378lm | 37.3W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-35-D1-ELDO-BLMT | DALI-2 - 1% | 3500K | 3327lm | 37.3W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-27-0101-ELDO75-BLMT [3] | 0-10V - 1% | 2700K | 2484lm | 29.6W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-30-0101-ELDO75-BLMT [3] | 0-10V - 1% | 3000K | 2620lm | 29.6W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-35-0101-ELDO75-BLMT [3] | 0-10V - 1% | 3500K | 2552lm | 29.6W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-27-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 2700K | 2484lm | 29.6W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-30-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 3000K | 2620lm | 29.6W | C0: 63° / C90: 91° |
| STRAW60-LINGR-49.6-35-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 3500K | 2552lm | 29.6W | C0: 63° / C90: 91° |

(1) Consult the factory for dimmer compatibility
(2) Output shows the delivered lumens
(3) Version factory-preset to lower light output to achieve a UGR value of 19 or lower

## Linear Batwing Grid - 49.6" - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LINBWGR-49.6-27-0101-ELDO-BLMT | 0-10V - 1% | 2700K | 2857lm | 37.3W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-30-0101-ELDO-BLMT | 0-10V - 1% | 3000K | 3015lm | 37.3W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-35-0101-ELDO-BLMT | 0-10V - 1% | 3500K | 2969lm | 37.3W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-27-D1-ELDO-BLMT | DALI-2 - 1% | 2700K | 2857lm | 37.3W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-30-D1-ELDO-BLMT | DALI-2 - 1% | 3000K | 3015lm | 37.3W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-35-D1-ELDO-BLMT | DALI-2 - 1% | 3500K | 2969lm | 37.3W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-27-0101-ELDO75-BLMT [3] | 0-10V - 1% | 2700K | 2001lm | 26.8W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-30-0101-ELDO75-BLMT [3] | 0-10V - 1% | 3000K | 2111lm | 26.8W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-35-0101-ELDO75-BLMT [3] | 0-10V - 1% | 3500K | 2048lm | 26.8W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-27-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 2700K | 2001lm | 26.8W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-30-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 3000K | 2111lm | 26.8W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-49.6-35-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 3500K | 2048lm | 26.8W | C0: 83° / C90: 91° |

(1) Consult the factory for dimmer compatibility
(2) Output shows the delivered lumens
(3) Version factory-preset to lower light output to achieve a UGR value of 19 or lower

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Linear Uplight Modules (for Profile length 49.6")*

- Linear uplight module for Up/Down base profile
- Factory-mounted in the base profile
- Provided with batwing diffuser
- CRI: >90, R9: >50
- Lifetime: L95 B05 @ 50.000 hrs
- UGR & photometric files: see website

Linear Batwing Up

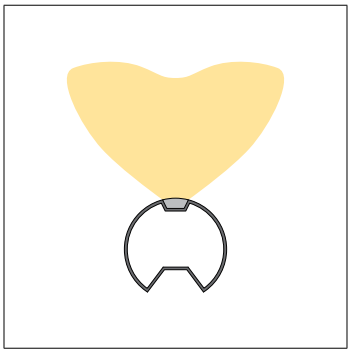

Linear Batwing Up

### Linear Batwing Up - 49.6" - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LINBW-U-49.6-27-0101-ELDO | 0-10V - 1% | 2700K | 2621lm | 24.5W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-49.6-30-0101-ELDO | 0-10V - 1% | 3000K | 2777lm | 24.5W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-49.6-35-0101-ELDO | 0-10V - 1% | 3500K | 2854lm | 24.5W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-49.6-27-D1-ELDO | DALI-2 - 1% | 2700K | 2621lm | 24.5W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-49.6-30-D1-ELDO | DALI-2 - 1% | 3000K | 2777lm | 24.5W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-49.6-35-D1-ELDO | DALI-2 - 1% | 3500K | 2854lm | 24.5W | C0: 130° / C90: 84° |

(1) Consult the factory for dimmer compatibility
(2) Output shows the delivered lumens

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Profiles (length: 71.6”)*

- Base profile for one or two linear light modules
- Length: 71.6”
- Adjustability: 360°
- Material: aluminum
- Finish: powder coat, anodisation or polishing
- Must be combined with linear light module (specify on pages 9 - 10)
- Up/Down version must additionally be combined with linear uplight module (specify on page 11)
- Profiles connect electrically and mechanically to the endplate or connection module via click-in connections
- Maximum amount of profiles to be connected, when no modules with uplight are connected: 14 pcs
- Maximum amount of profiles to be connected, when at least one uplight module is connected: 7 pcs

Profile - 71.6” (White Structure)

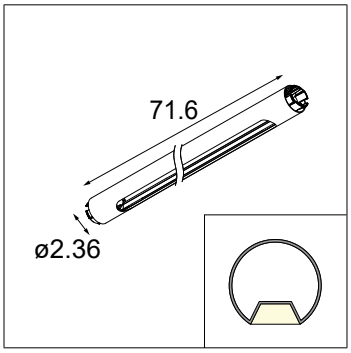


Profile - 71.6”

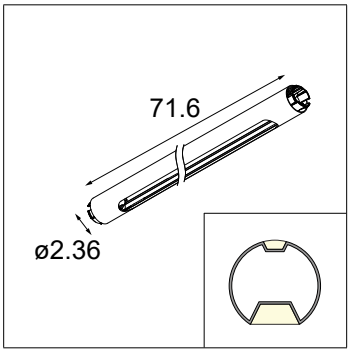


Profile Up/Down - 71.6”

### Specifications & Ordering Information

| Ordering Code | Version | Finish |
|---|---|---|
| STRAW60-PROF-71.6-BLS | Profile - 71.6" | Black Structure |
| STRAW60-PROF-71.6-WHS | Profile - 71.6" | White Structure |
| STRAW60-PROF-71.6-ALPO | Profile - 71.6" | Aluminum Polished |
| STRAW60-PROF-71.6-BLBA | Profile - 71.6" | Black Brushed Anodised |
| STRAW60-PROF-71.6-BRBA | Profile - 71.6" | Bronze Brushed Anodised |
| STRAW60-PROF-71.6-CHBA | Profile - 71.6" | Champagne Brushed Anodised |
| STRAW60-PROF-71.6-SBBA | Profile - 71.6" | Silver Bronze Brushed Anodised |
| STRAW60-PROF-UD-71.6-BLS | Profile Up/Down - 71.6" | Black Structure |
| STRAW60-PROF-UD-71.6-WHS | Profile Up/Down - 71.6" | White Structure |
| STRAW60-PROF-UD-71.6-ALPO | Profile Up/Down - 71.6" | Aluminum Polished |
| STRAW60-PROF-UD-71.6-BLBA | Profile Up/Down - 71.6" | Black Brushed Anodised |
| STRAW60-PROF-UD-71.6-BRBA | Profile Up/Down - 71.6" | Bronze Brushed Anodised |
| STRAW60-PROF-UD-71.6-CHBA | Profile Up/Down - 71.6" | Champagne Brushed Anodised |
| STRAW60-PROF-UD-71.6-SBBA | Profile Up/Down - 71.6" | Silver Bronze Brushed Anodised |

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Linear Light Modules (for Profile length 71.6”)*

- Linear light module for base profile
- Factory-mounted in the base profile
- Provided with frosted diffuser, optionally available with batwing diffuser and/or glare control grid
- Trim finish: matte black
- Glare control grid finish: black chrome
- CRI: >90, R9: >50
- Lifetime: L95 B05 @ 50.000 hrs
- UGR & photometric files: see website

Linear / Linear Batwing

Linear Grid / Linear Batwing Grid

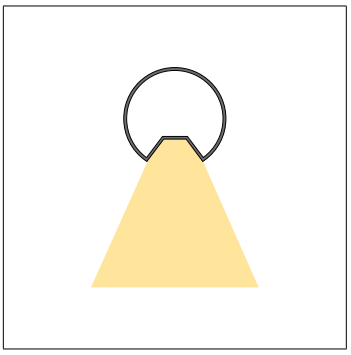

Linear

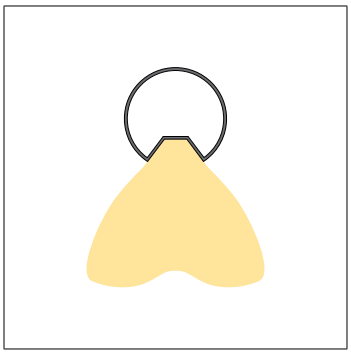

Linear Batwing

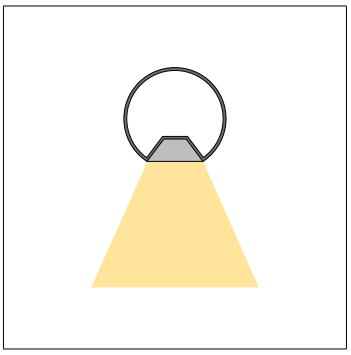

Linear Grid

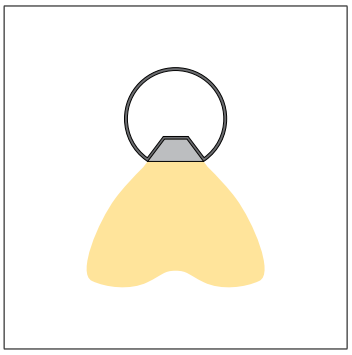

Linear Batwing Grid

### Linear - 71.6” - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LIN-71.6-27-0101-ELDO-BLMT | 0-10V - 1% | 2700K | 6099lm | 55.4W | C0: 60° / C90: 101° |
| STRAW60-LIN-71.6-30-0101-ELDO-BLMT | 0-10V - 1% | 3000K | 6435lm | 55.4W | C0: 60° / C90: 101° |
| STRAW60-LIN-71.6-35-0101-ELDO-BLMT | 0-10V - 1% | 3500K | 6370lm | 55.4W | C0: 60° / C90: 101° |
| STRAW60-LIN-71.6-27-D1-ELDO-BLMT | DALI-2 - 1% | 2700K | 6099lm | 55.4W | C0: 60° / C90: 101° |
| STRAW60-LIN-71.6-30-D1-ELDO-BLMT | DALI-2 - 1% | 3000K | 6435lm | 55.4W | C0: 60° / C90: 101° |
| STRAW60-LIN-71.6-35-D1-ELDO-BLMT | DALI-2 - 1% | 3500K | 6370lm | 55.4W | C0: 60° / C90: 101° |

[1] Consult the factory for dimmer compatibility
[2] Output shows the delivered lumens

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## Linear Batwing - 71.6" - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LINBW-71.6-27-0101-ELDO-BLMT | 0-10V - 1% | 2700K | 5247lm | 55.4W | C0: 86° / C90: 104° |
| STRAW60-LINBW-71.6-30-0101-ELDO-BLMT | 0-10V - 1% | 3000K | 5536lm | 55.4W | C0: 86° / C90: 104° |
| STRAW60-LINBW-71.6-35-0101-ELDO-BLMT | 0-10V - 1% | 3500K | 5481lm | 55.4W | C0: 86° / C90: 104° |
| STRAW60-LINBW-71.6-27-D1-ELDO-BLMT | DALI-2 - 1% | 2700K | 5247lm | 55.4W | C0: 86° / C90: 104° |
| STRAW60-LINBW-71.6-30-D1-ELDO-BLMT | DALI-2 - 1% | 3000K | 5536lm | 55.4W | C0: 86° / C90: 104° |
| STRAW60-LINBW-71.6-35-D1-ELDO-BLMT | DALI-2 - 1% | 3500K | 5481lm | 55.4W | C0: 86° / C90: 104° |

(1) Consult the factory for dimmer compatibility
(2) Output shows the delivered lumens

## Linear Grid - 71.6" - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LINGR-71.6-27-0101-ELDO-BLMT | 0-10V - 1% | 2700K | 4803lm | 55.4W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-30-0101-ELDO-BLMT | 0-10V - 1% | 3000K | 5067lm | 55.4W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-35-0101-ELDO-BLMT | 0-10V - 1% | 3500K | 5016lm | 55.4W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-27-D1-ELDO-BLMT | DALI-2 - 1% | 2700K | 4803lm | 55.4W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-30-D1-ELDO-BLMT | DALI-2 - 1% | 3000K | 5067lm | 55.4W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-35-D1-ELDO-BLMT | DALI-2 - 1% | 3500K | 5016lm | 55.4W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-27-0101-ELDO75-BLMT [3] | 0-10V - 1% | 2700K | 3726lm | 42.0W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-30-0101-ELDO75-BLMT [3] | 0-10V - 1% | 3000K | 3930lm | 42.0W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-35-0101-ELDO75-BLMT [3] | 0-10V - 1% | 3500K | 3746lm | 42.0W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-27-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 2700K | 3726lm | 42.0W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-30-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 3000K | 3930lm | 42.0W | C0: 63° / C90: 91° |
| STRAW60-LINGR-71.6-35-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 3500K | 3746lm | 42.0W | C0: 63° / C90: 91° |

(1) Consult the factory for dimmer compatibility
(2) Output shows the delivered lumens
(3) Version factory-preset to lower light output to achieve a UGR value of 19 or lower

## Linear Batwing Grid - 71.6" - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LINBWGR-71.6-27-0101-ELDO-BLMT | 0-10V - 1% | 2700K | 4286lm | 55.4W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-30-0101-ELDO-BLMT | 0-10V - 1% | 3000K | 4522lm | 55.4W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-35-0101-ELDO-BLMT | 0-10V - 1% | 3500K | 4477lm | 55.4W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-27-D1-ELDO-BLMT | DALI-2 - 1% | 2700K | 4286lm | 55.4W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-30-D1-ELDO-BLMT | DALI-2 - 1% | 3000K | 4522lm | 55.4W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-35-D1-ELDO-BLMT | DALI-2 - 1% | 3500K | 4477lm | 55.4W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-27-0101-ELDO75-BLMT [3] | 0-10V - 1% | 2700K | 3002lm | 39.2W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-30-0101-ELDO75-BLMT [3] | 0-10V - 1% | 3000K | 3167lm | 39.2W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-35-0101-ELDO75-BLMT [3] | 0-10V - 1% | 3500K | 3109lm | 39.2W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-27-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 2700K | 3002lm | 39.2W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-30-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 3000K | 3167lm | 39.2W | C0: 83° / C90: 91° |
| STRAW60-LINBWGR-71.6-35-D1-ELDO75-BLMT [3] | DALI-2 - 1% | 3500K | 3109lm | 39.2W | C0: 83° / C90: 91° |

(1) Consult the factory for dimmer compatibility
(2) Output shows the delivered lumens
(3) Version factory-preset to lower light output to achieve a UGR value of 19 or lower

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Linear Uplight Modules (for Profile length 71.6")*

- Linear uplight module for Up/Down base profile
- Factory-mounted in the base profile
- Provided with batwing diffuser
- CRI: >90, R9: >50
- Lifetime: L95 B05 @ 50.000 hrs
- UGR & photometric files: see website

Linear Batwing Up

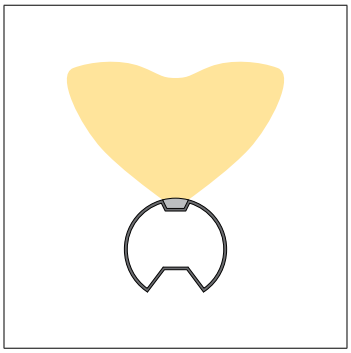

Linear Batwing Up

### Linear Batwing Up - 71.6" - Specifications & Ordering Information

| Ordering Code | Dim [1] | CCT | Output [2] | Power | Beam Angle |
|---|---|---|---|---|---|
| STRAW60-LINBW-U-71.6-27-0101-ELDO | 0-10V - 1% | 2700K | 5241lm | 45.1W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-71.6-30-0101-ELDO | 0-10V - 1% | 3000K | 5553lm | 45.1W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-71.6-35-0101-ELDO | 0-10V - 1% | 3500K | 5708lm | 45.1W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-71.6-27-D1-ELDO | DALI-2 - 1% | 2700K | 5241lm | 45.1W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-71.6-30-D1-ELDO | DALI-2 - 1% | 3000K | 5553lm | 45.1W | C0: 130° / C90: 84° |
| STRAW60-LINBW-U-71.6-35-D1-ELDO | DALI-2 - 1% | 3500K | 5708lm | 45.1W | C0: 130° / C90: 84° |

(1) Consult the factory for dimmer compatibility
(2) Output shows the delivered lumens

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Blind Profiles*

- Made-to-measure blind profile for longer run lengths
- Without light modules
- Length: minimum 12”, maximum 71.6”
- Specify lengths to nearest 1/16”
- Material: aluminum
- Finish: powder coat, anodisation or polishing
- Profile connection needs to be ordered for each profile tube (connection parts are factory-mounted in the tube)
- Profiles connect electrically and mechanically to the endplate or connection module via click-in connections



Blind Profile Tube (White Structure)

Blind Profile Connection (Electrical/Mechanical)

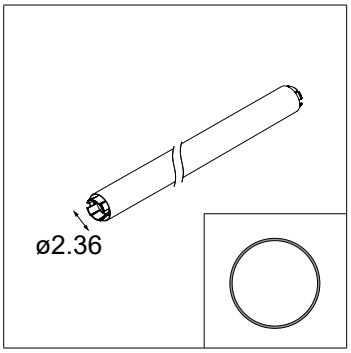


Blind Profile

### Specifications & Ordering Information

| Ordering Code | Version | Finish |
|---|---|---|
| STRAW60-PROF-BLIND-BLS-M | Blind Profile Tube | Black Structure |
| STRAW60-PROF-BLIND-WHS-M | Blind Profile Tube | White Structure |
| STRAW60-PROF-BLIND-ALPO-M | Blind Profile Tube | Aluminum Polished |
| STRAW60-PROF-BLIND-BLBA-M | Blind Profile Tube | Black Brushed Anodised |
| STRAW60-PROF-BLIND-BRBA-M | Blind Profile Tube | Bronze Brushed Anodised |
| STRAW60-PROF-BLIND-CHBA-M | Blind Profile Tube | Champagne Brushed Anodised |
| STRAW60-PROF-BLIND-SBBA-M | Blind Profile Tube | Silver Bronze Brushed Anodised |
| STRAW60-PROF-BLIND-CONN | Blind Profile Connection (Electrical/Mechanical) | n/a |

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Endplates*

### Suspension End

- End module used to suspend the profile from the ceiling
- Length: 6.3”
- Material: aluminum
- Finish: powder coat, anodisation or polishing
- Must be combined with suspension set (specify on page 15)
- Profiles connect electrically and mechanically to the endplate via click-in connections

### Power Feed and Suspension End

- End module used to suspend the profile from the ceiling
- Used to supply electrical power to the configuration
- Length: 6.3”
- Material: aluminum
- Finish: powder coat, anodisation or polishing
- Must be combined with suspension set (specify on page 15)
- Must be combined with power feed canopy and power feed cable (specify on page 16)
- Profiles connect electrically and mechanically to the endplate via click-in connections

Suspension End (White Structure)

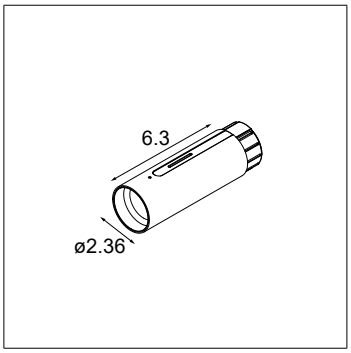


Suspension End

Power Feed and Suspension End (White Structure)

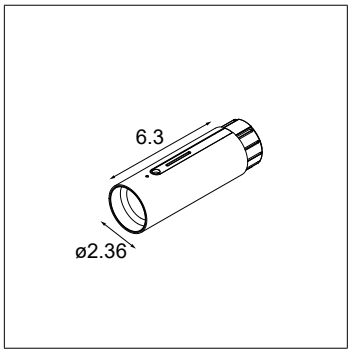


Power Feed and Suspension End

## Specifications & Ordering Information

| Ordering Code | Version | Finish |
|---|---|---|
| STRAW60-SP-END-BLS | Suspension End | Black Structure |
| STRAW60-SP-END-WHS | Suspension End | White Structure |
| STRAW60-SP-END-ALPO | Suspension End | Aluminum Polished |
| STRAW60-SP-END-BLBA | Suspension End | Black Brushed Anodised |
| STRAW60-SP-END-BRBA | Suspension End | Bronze Brushed Anodised |
| STRAW60-SP-END-CHBA | Suspension End | Champagne Brushed Anodised |
| STRAW60-SP-END-SBBA | Suspension End | Silver Bronze Brushed Anodised |
| STRAW60-PF-SP-END-BLS | Power Feed and Suspension End | Black Structure |
| STRAW60-PF-SP-END-WHS | Power Feed and Suspension End | White Structure |
| STRAW60-PF-SP-END-ALPO | Power Feed and Suspension End | Aluminum Polished |
| STRAW60-PF-SP-END-BLBA | Power Feed and Suspension End | Black Brushed Anodised |
| STRAW60-PF-SP-END-BRBA | Power Feed and Suspension End | Bronze Brushed Anodised |
| STRAW60-PF-SP-END-CHBA | Power Feed and Suspension End | Champagne Brushed Anodised |
| STRAW60-PF-SP-END-SBBA | Power Feed and Suspension End | Silver Bronze Brushed Anodised |

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Connections*

### Suspension Mid

- Connection module used to suspend the profile from the ceiling and connect multiple profiles
- Length: 3.5”
- Material: aluminum
- Finish: powder coat, anodisation or polishing
- Must be combined with suspension set (specify on page 15)
- Profiles connect electrically and mechanically to the connection module via click-in connections

### Power Feed and Suspension Mid

- Connection module used to suspend the profile from the ceiling and connect multiple profiles
- Used to supply electrical power to the configuration
- Length: 6.3”
- Material: aluminum
- Finish: powder coat, anodisation or polishing
- Must be combined with suspension set (specify on page 15)
- Must be combined with power feed canopy and power feed cable (specify on page 16)
- Profiles connect electrically and mechanically to the connection module via click-in connections

Suspension Mid (White Structure)

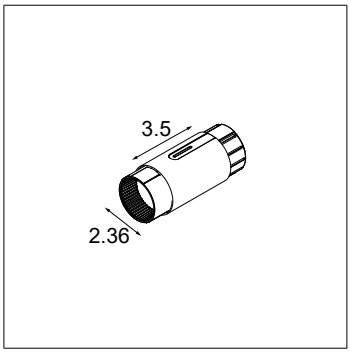


Suspension Mid

Power Feed and Suspension Mid (White Structure)

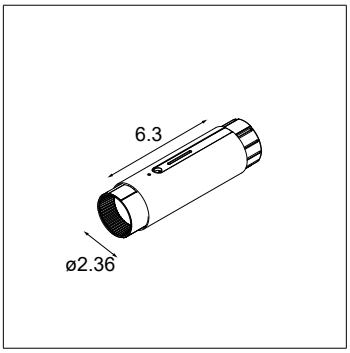


Power Feed and Suspension Mid

## Specifications & Ordering Information

| Ordering Code | Version | Finish |
|---|---|---|
| STRAW60-SP-MID-BLS | Suspension Mid | Black Structure |
| STRAW60-SP-MID-WHS | Suspension Mid | White Structure |
| STRAW60-SP-MID-ALPO | Suspension Mid | Aluminum Polished |
| STRAW60-SP-MID-BLBA | Suspension Mid | Black Brushed Anodised |
| STRAW60-SP-MID-BRBA | Suspension Mid | Bronze Brushed Anodised |
| STRAW60-SP-MID-CHBA | Suspension Mid | Champagne Brushed Anodised |
| STRAW60-SP-MID-SBBA | Suspension Mid | Silver Bronze Brushed Anodised |
| STRAW60-PF-SP-MID-BLS | Power Feed and Suspension Mid | Black Structure |
| STRAW60-PF-SP-MID-WHS | Power Feed and Suspension Mid | White Structure |
| STRAW60-PF-SP-MID-ALPO | Power Feed and Suspension Mid | Aluminum Polished |
| STRAW60-PF-SP-MID-BLBA | Power Feed and Suspension Mid | Black Brushed Anodised |
| STRAW60-PF-SP-MID-BRBA | Power Feed and Suspension Mid | Bronze Brushed Anodised |
| STRAW60-PF-SP-MID-CHBA | Power Feed and Suspension Mid | Champagne Brushed Anodised |
| STRAW60-PF-SP-MID-SBBA | Power Feed and Suspension Mid | Silver Bronze Brushed Anodised |

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Accessories (mechanical)*

### Suspension Set

- Required to suspend the configuration from the ceiling
- One required for each endplate or connection module
- Can be combined with suspension hinge for sloped ceilings
- Aircraft cable diameter: 0.05”
- Aircraft cable color: black
- Aircraft cable length: 78.7” or 236.2” (can be field adjusted)

### Suspension Hinge

- Required for installation on sloped ceilings
- Attaches to the Suspension set (aircraft cables)
- Bracket material: stainless steel
- Finish: powder coat

Suspension Set (White Structure)

Suspension Set (Black Structure)

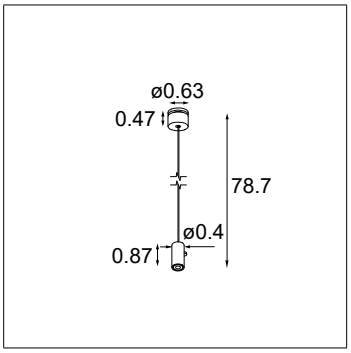


Suspension Set - 78.7”

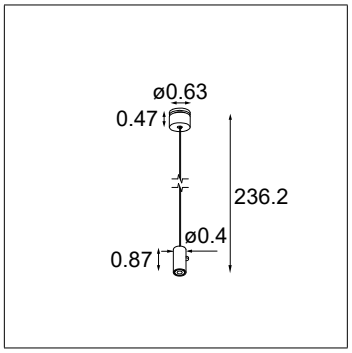


Suspension Set - 236.2”

Suspension Set + Hinge (White Structure)

Suspension Set + Hinge (Black Structure)

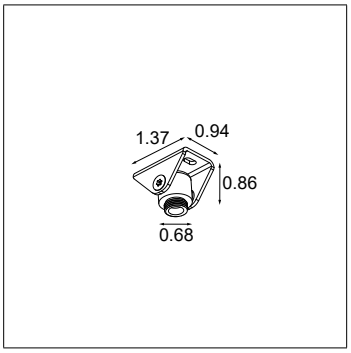


Suspension Hinge

## Specifications & Ordering Information

| Ordering Code | Version | Finish |
|---|---|---|
| STRAW60-SP-78.7-BLS | Suspension Set - 78.7" | Black Structure |
| STRAW60-SP-78.7-WHS | Suspension Set - 78.7" | White Structure |
| STRAW60-SP-236.2-BLS | Suspension Set - 236.2" | Black Structure |
| STRAW60-SP-236.2-WHS | Suspension Set - 236.2" | White Structure |
| SP-HINGE-BLS | Suspension Hinge | Black Structure |
| SP-HINGE-WHS | Suspension Hinge | White Structure |

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation

## *Accessories (electrical)*

### Power Feed Canopy

- Required to supply electrical power to the configuration
- One required for each configuration
- For installation with a 4”x4” octagonal junction box
- Canopy covers the junction box
- Canopy can be painted in the field to match the color of the ceiling (consult the factory for details)
- Material: stainless steel
- Finish: powder coat
- Thickness: 0.08”

### Power Feed Cable

- Required to supply electrical power to the configuration
- Factory-mounted to the endplate or connection module
- Cable type: SJT
- Cable diameter: 0.36”
- Cable color: black
- Cable conductors: 5x18AWG
- Cable length: on request (can be field adjusted)

Power Feed Canopy (White Structure)

Power Feed Canopy (Black Structure)

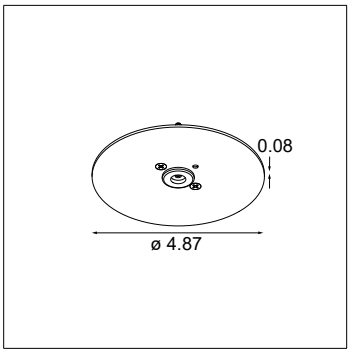


Power Feed Canopy

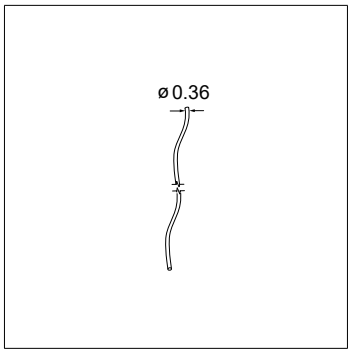


Power Feed Cable

## Specifications & Ordering Information

| Ordering Code | Version | Finish |
|---|---|---|
| STRAW60-PF-CANOPY-RC-RN-BLS | Power Feed Canopy | Black Structure |
| STRAW60-PF-CANOPY-RC-RN-WHS | Power Feed Canopy | White Structure |
| PF-5X18AWG-BL-M | Power Feed Cable | Black |

## *Listings and Certifications*

- Listed: cULus
- Dry locations

## *Warranty*

- Visit https://www.supermodular.com/en-us/warranty/

clear form

MLI NA Corporation reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com
04 - 05/11/2026 - © MLI NA Corporation