


Klevr Recessed Adjustable 72 1x IP55 LED DE

140204XX_140205XX_140206XX_140207XX_140208XX_140209XX_140210XX_140211XX_140212XX_140213XX_140214XX_140215XX_140217XX_140218XX_140219XX_140220XX

1








ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	10,4	12,7	4,1
500	10,8	13,2	6,1
700	11,4	13,7	8,8
RED		BLACK	
For serial connection only! Respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			


Minimum volume requirements

Without driver:


In false ceiling:



In concrete:







With driver:

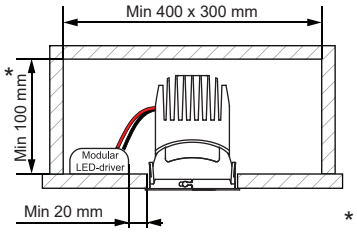


* check the tilt-in height for drivers


2

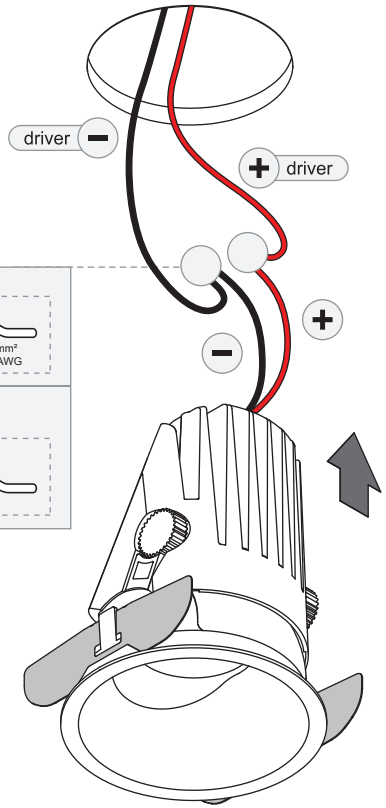


IP20	wago connectors included  
IP55	waterproof connectors not included Modular reference number : 1000385  





FIXATE ROTATION



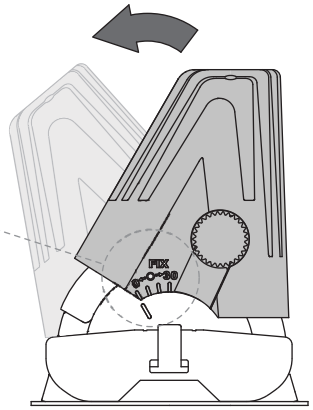

3







Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number:
SPOT - 1016714
MEDIUM - 1016383
FLOOD - 1016384
WIDE FLOOD - 1016385



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source.The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

