



Nyto Surface Adjustable 60 Round 1x LED DE

139942XX_139943XX_139944XX_139947XX_139948XX_139949XX

1

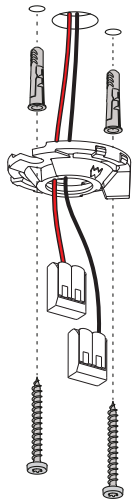


ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
250	32,8	34,9	8,4
350	33,6	35,7	12,1
500	34,9	37,0	17,8


+ RED **-** BLACK

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.


CUT-OUT HOLES

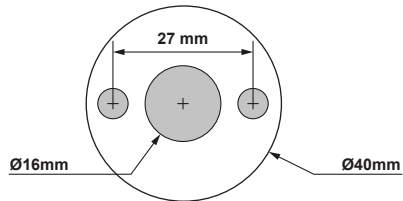


2

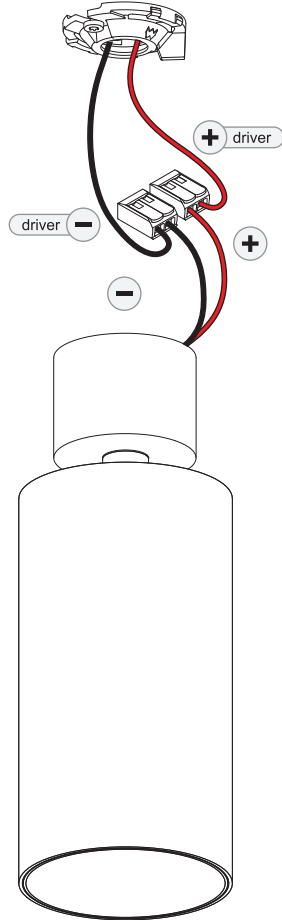

3

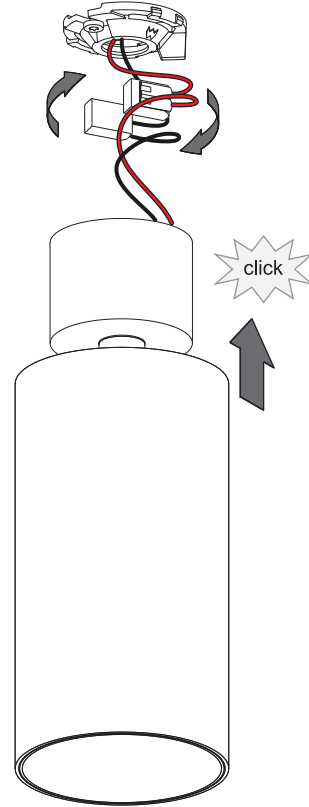

4

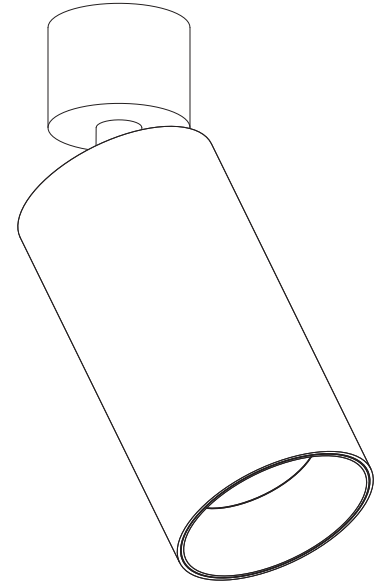

Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1016930 (medium), 1016928 (flood), 1016926 (wide flood).



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

SERVICEABLE COMPONENTS & ACCESSORIES

For latest version of available accessories or serviceable components check www.supermodular.com or connect with your sales contact.

ONLY TO BE INSTALLED OUTSIDE ARM'S REACH