

Gamin Jack 90 Alabaster LED DE

136030XX_136031XX


1.1 INSTALL

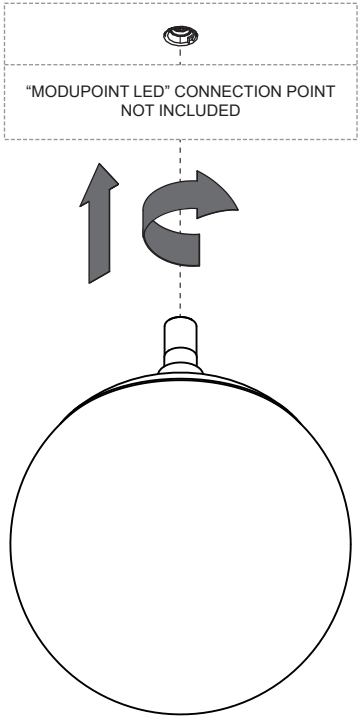





ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	13,2	15,0	5,0
500	13,7	15,4	7,2
⊕ RED		⊖ BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			


1.2 INSTALL

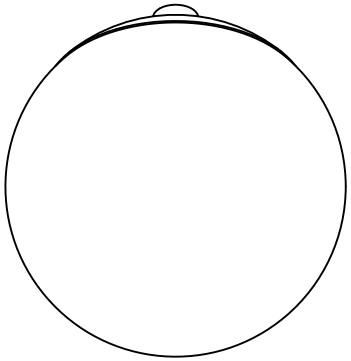




2 UNINSTALL

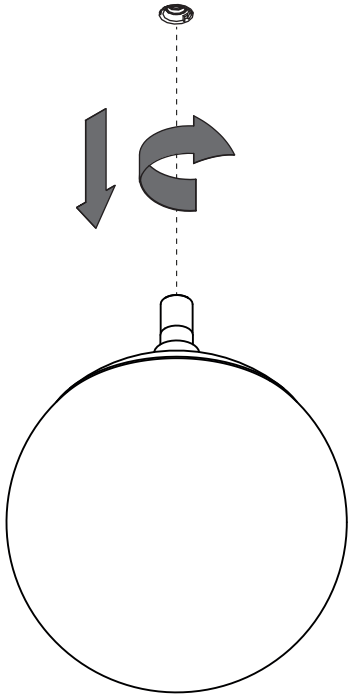



NOT COMPATIBLE WITH ALL MODUPOINT (CURVED) STICKS.

DESK



CEILING



WALL

ONLY IN COMBINATION WITH
PANEL MOUNT + FIXATION RING



ONLY CURVED STICK 90°
(FACING UP OR DOWN)



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield. Reference number: 10217800



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source.The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.