

LED Driver 24V 30W Pushdim DALI


13552830_98000004

WIRING DIAGRAM


DALI diagram



Push dim diagram



⚠ PARALLEL CONNECTION, RESPECT POLARITY

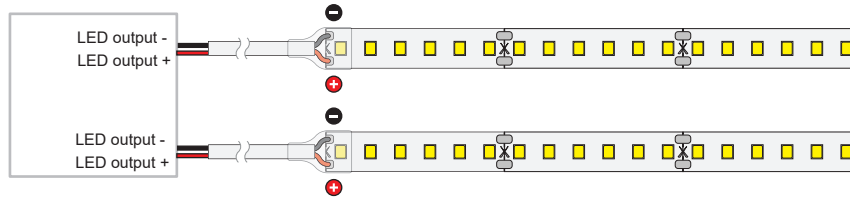

ELECTRICAL CHARACTERISTICS

NOMINAL INPUT VOLTAGE RANGE AC

220 - 240V

INPUT FREQUENCY RANGE

50...60HZ

MAXIMUM OUTPUT POWER

30W

MINIMUM OUTPUT POWER

12W

TEMPERATURE

T_c = 80°C

T_a = -25...+45°C


EFFICIENCY AT FULL LOAD

87%

MAXIMUM DRIVERS ON MCB 16A TYPE B

29

DIMENSIONS

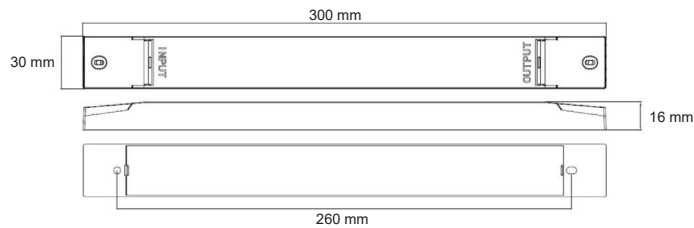

OPERATING WINDOW

24V 12 - 30W

OPERATING MODE

- Compatible with standard DALI interfaces
- DALI-2 approved
- 1-100% dimming

Technical datasheet available on request

FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

