
Modest 74 Leaf Spring IP55 LED 1800-3000K WD DE

137806XX


1

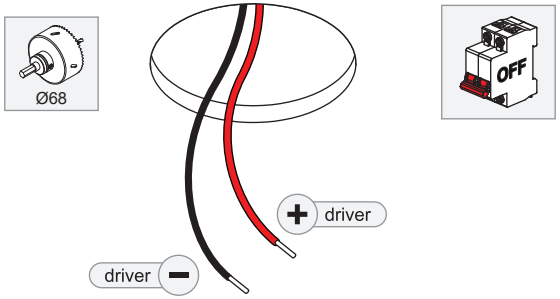


WARM DIM
ELECTRICAL SPECS

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
250	29,5	35,8	8,3
+ RED		− BLACK	


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

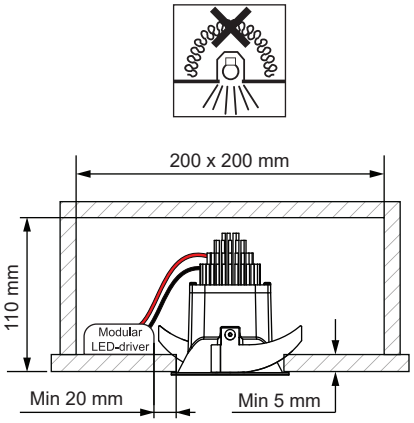

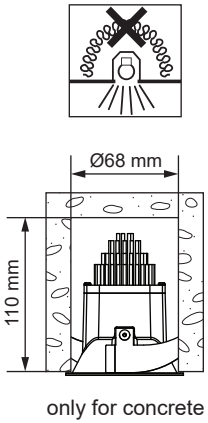


only for concrete


2

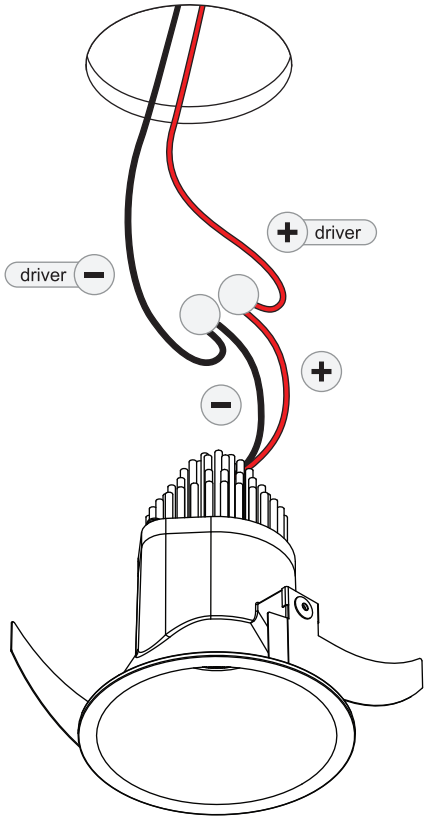

IP20	wago connectors included 11mm 0,2 - 4mm² 24 - 12 AWG
IP55	waterproof connectors not included Modular reference number : 1000385 15mm

3





Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1015704

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source.The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

III IP 55 UK CA CE