


Minude Kompas Suspended 45 1x LED Medium DE

114652XX\_114653XX



Fixture must be combined with “Kompas”  
Several DIM options & power options available.  
For more info & max amount of fixtures check installation instruction of Kompas:[www.supermodular.com](http://www.supermodular.com)

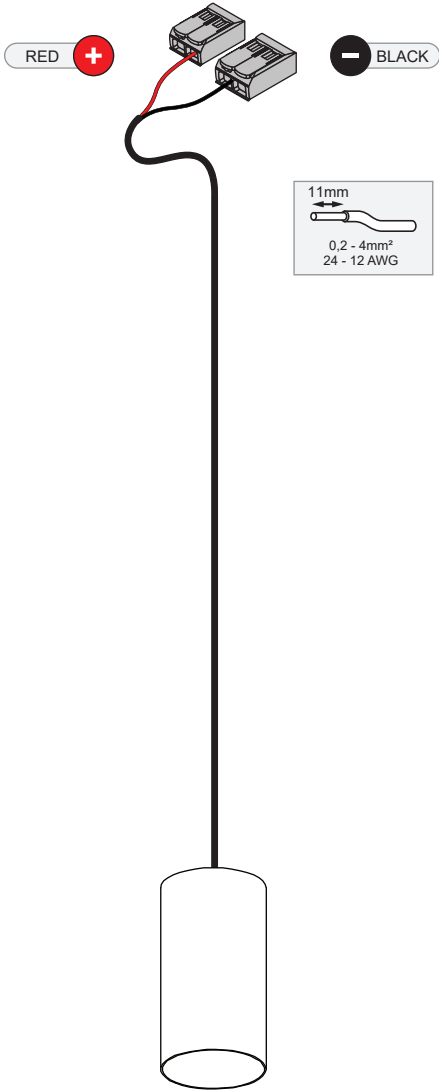

ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	14,0	18,0	5,6
500	14,2	18,2	8,1
⊕ RED		⊖ BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

TURN OFF POWER DURING INSTALLATION



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.  
Reference number: 1014378



**LIGHT SOURCE - DO NOT TOUCH LED**  
Touching the LED can result in permanent damage of the light source. The light source and/or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



**PREVENTING ELECTROSTATIC DAMAGE**  
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.