


Thimble Recessed Trimless 70 1x IP55 LED Medium DE


116220XX_116221XX

1 CHOOSE INSTALLATION ACCESSORY - NOT INCLUDED


Recessed Trimless Ring Ø70
11624530




Plaster Kit Recessed Trimless 150x150 - Ø70
11624630



Concrete ring Ø70 for standard concrete boxes
11624430



Concrete kit 150x150 - Ø70
11624230




2



driver +


driver -



Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	14,8	18,0	5,7
500	15,2	18,6	8,5
+		-	
⊕ RED		⊖ BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

3





driver +



driver -

+

-



4



Replace protective shield when broken.
The luminaire shall only be used complete with its protective shield.
Reference number: 1014378



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source and/ or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.




PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

Minimum volume requirement – with driver

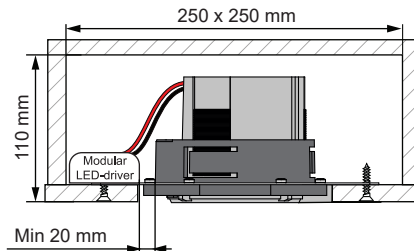

Minimum volume requirement – without driver

