


Smart Cake/Kup/Lotis 82 IP55 LED WarmDim DE

124141XX_124142XX_124741XX_124742XX_124441XX_124442XX

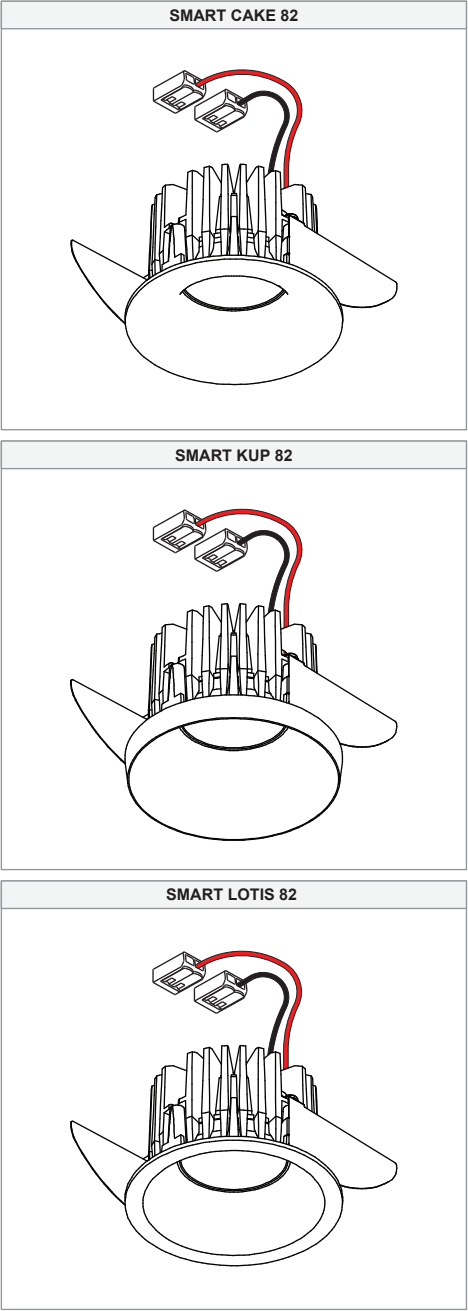


1

2

3

WARM DIM ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	15,5	18,5	6
+ RED		- BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

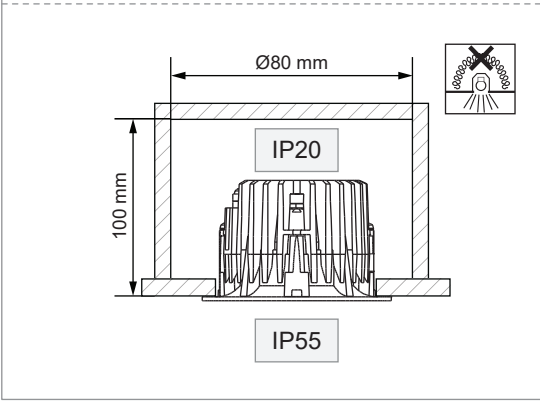

1

2

3

WARM DIM ELECTRICAL SPECS LED-FIXTURE	
Drive Current (mA)	Forward Voltage
350	15,5
+ RED	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

1

2

3

WARM DIM ELECTRICAL SPECS LED-FIXTURE	
Drive Current (mA)	Forward Voltage
350	15,5
+ RED	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.