











127710XX_127711XX_127712XX_127713XX_127714XX_127715XX_127716XX_127717XX_127718XX_127810XX_127811XX_127812XX_127813XX_127814XX_127815XX_127816XX_127817XX_127818XX_127910XX_127911XX_127912XX_127913XX_127914XX_127915XX_127916XX_127917XX_127918XX




Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	16,5	19,2	6,2
500	17,1	19,8	9,2
700	17,7	20,8	13,4

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.



For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

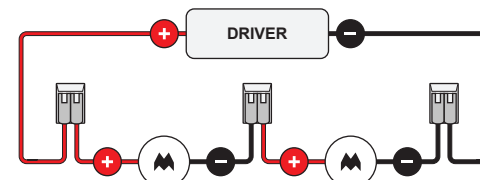

Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!