
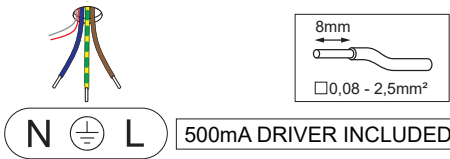


Smart surface tubed 82 XL LED GI




128430XX_128431XX_128432XX

VISUALIZATION WITH 'SMART LOTIS'
READ 'CAN BE USED WITH' FOR ALL
OTHER USEFUL 'SMART' PRODUCTS
'SMART 82 GE' FIXTURE NOT INCLUDED







Disconnect fixture connectors
and pull wires through opening

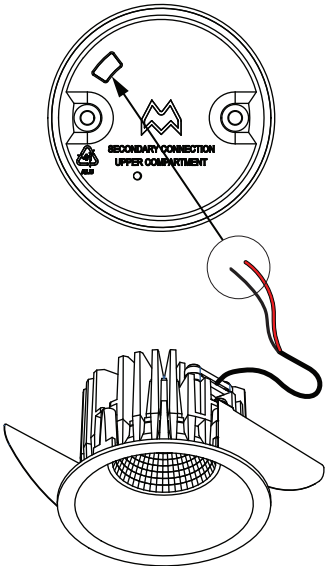

connect dim-wiring for:

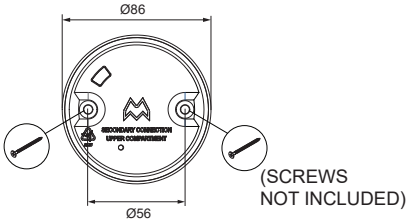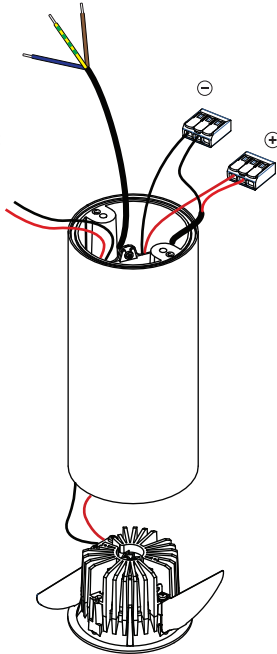

IP54 only when used with included O-ring
and combined with 'Smart 82 IP54' fixture

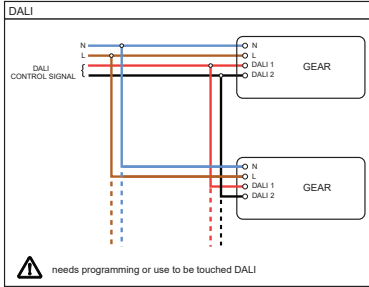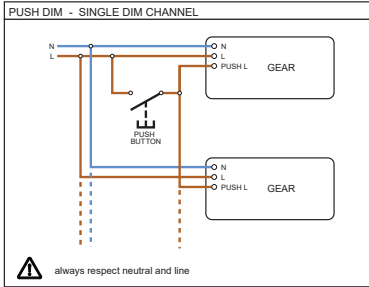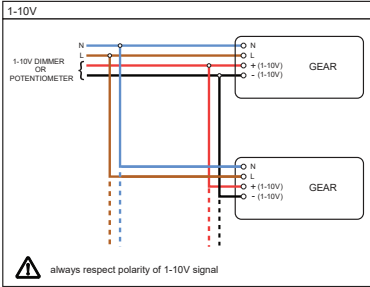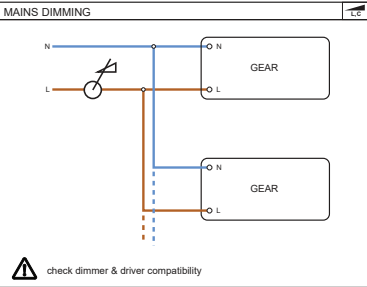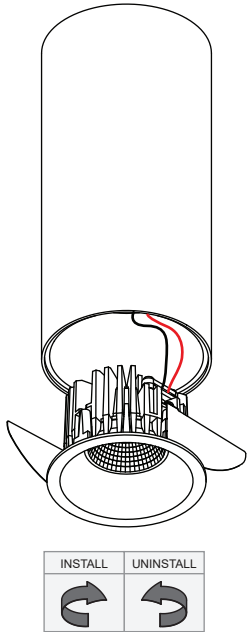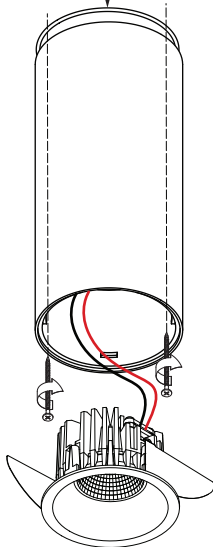

LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

CAN BE USED WITH:
Smart 82 (IP*) LED GE
Smart 82 adjustable LED GE

CAN NOT BE USED WITH:
Smart 82 (IP) warmdim LED GE
Smart 82 adjustable warmdim LED GE

