
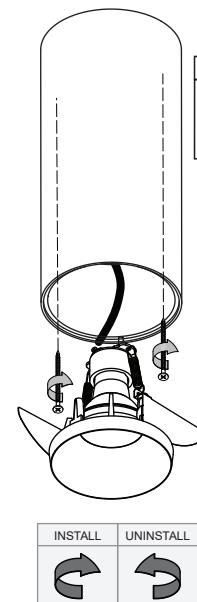
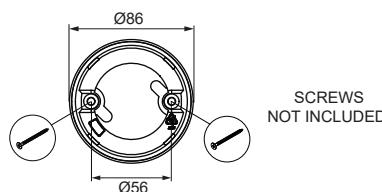




Smart surface tubed 82 XL LED GE

128433XX



Combined with smart 82 LED retrofit **GU10**
(LED-fixture on visualization not included)

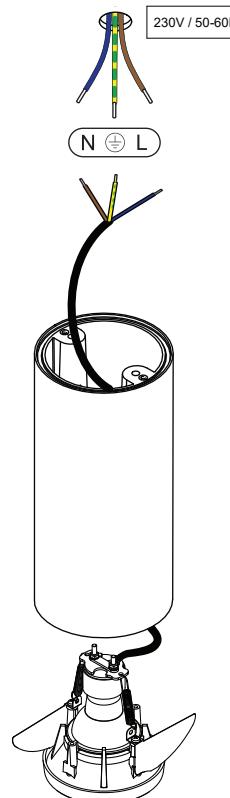

Combined with smart 82 LED **GE**
(LED-fixture on visualization not included)

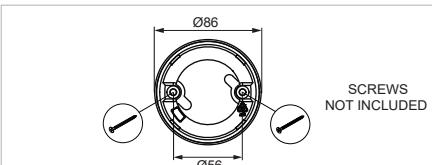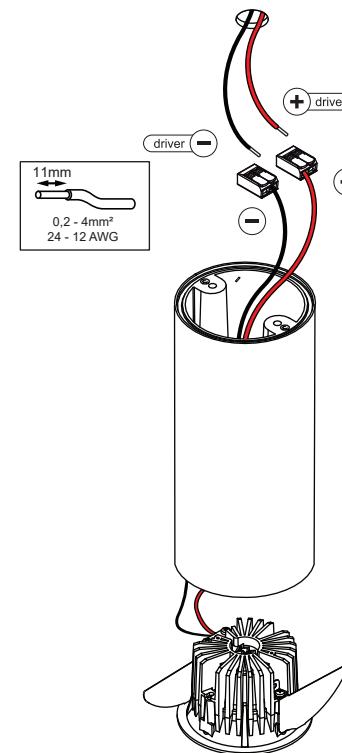

For serial connection, respect polarity!
+ RED - BLACK

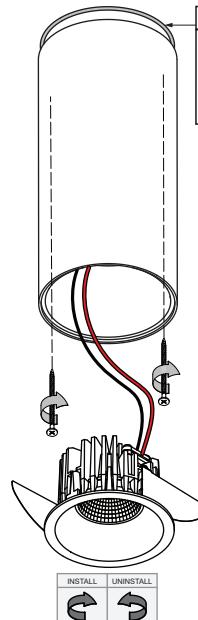

CAN BE USED WITH

ATTENTION

Set at these MAX drive currents:

Smart 82 (IP*) LED GE	500 mA
Smart 82 adjustable LED GE	500 mA
Smart 82 (IP*) warmdim LED GE	350 mA
Smart 82 adjustable warmdim LED GE	350 mA
Smart 82 GU10 for tube	



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

