



WINK 115 IP LED GE

130700XX 130701XX 130702XX 130703XX 130704XX 130705XX 130706XX 130707XX 130708XX

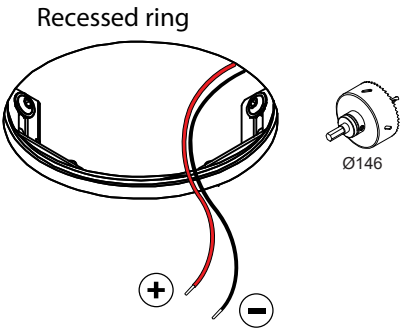


or

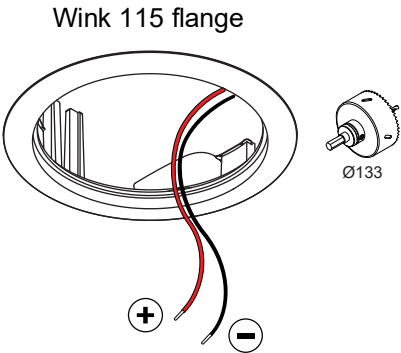


Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	29,1	33,7	11,0
500	29,9	34,7	16,2
700	31,0	35,8	23,4


For serial connection, respect polarity!

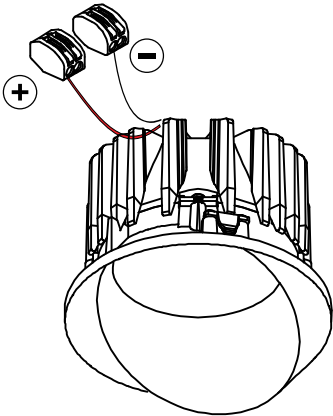


inner edge must be perfectly clean

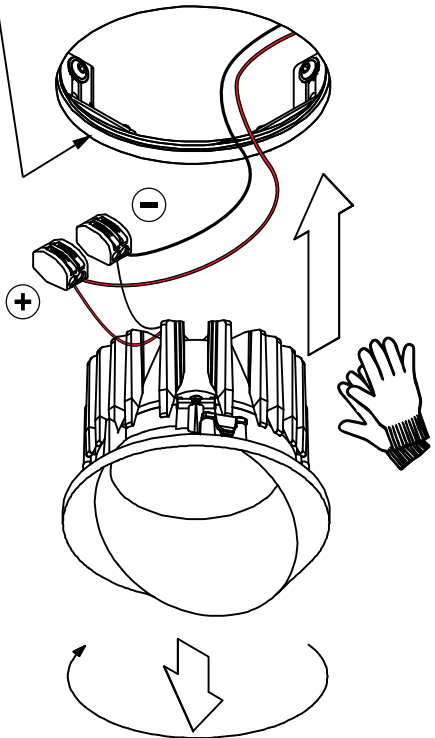


uninstall : Twist & Pull


 The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person


 DO NOT TOUCH LED

**CHECK DIP-SWITCHES ON DRIVER**

 ON OFF 1 2 3 4 5 6

**PREVENTING ELECTROSTATIC DAMAGE**

 A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

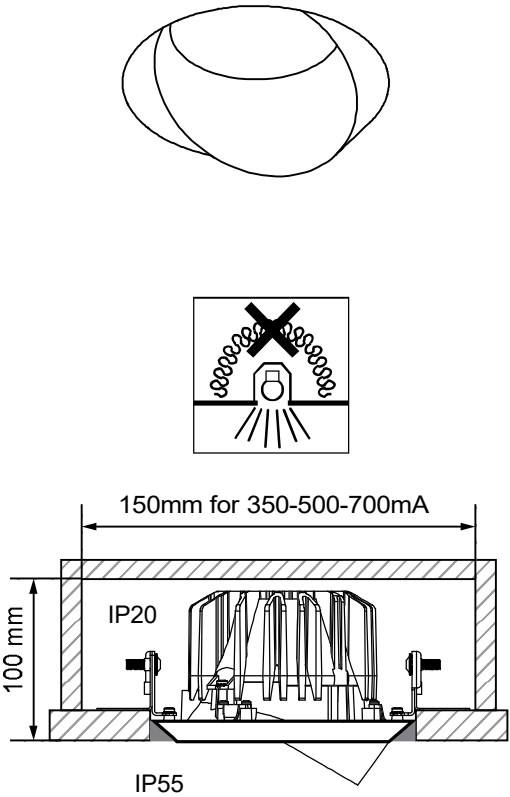

CAN BE USED WITH  
130730XX Wink 115 flange  
14204030 Recessed ring Ø146  
Drivers:  
see driver matrix - latest version on website  
[www.supermodular.com](http://www.supermodular.com) or check sales contact