

Smart surface tubed suspension 115 LED GI

131411XX_131412XX_131413XX

! (not possible with Smart 115 adjustable)
500mA DRIVER INCLUDED

Open 'SMART TUBED' cover

Disconnect fixture connectors and pull wires through opening

INSTALL

UNINSTALL

! DO NOT MODIFY DRIVER SETTINGS

Connect fixture (+ dim wires) and close tube cover (re-use included toothed washers & screws)

Only for '131412XX':
CONNECT 1-10V/PD wires to gear:

1-10V
grey = +
black = -

PUSH
black = Ls
(grey = N)

54

8mm
□ 0,08 - 2,5mm²





1-10V
grey = +
black = -

PUSH
black = Ls
(grey = N)

DALI
grey = DA
black = DA

N ⊕ L

If necessary:
Adjust cable length
(Max 2m)

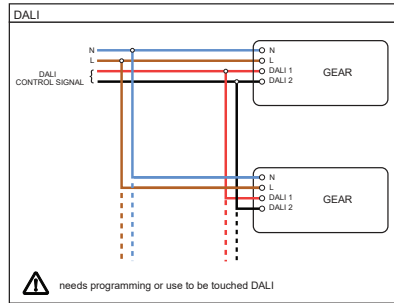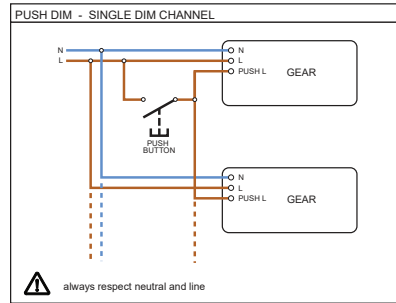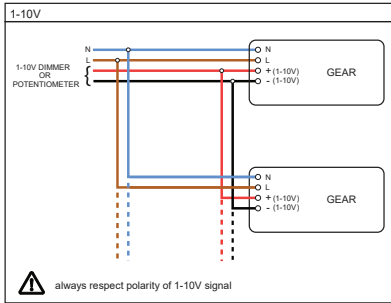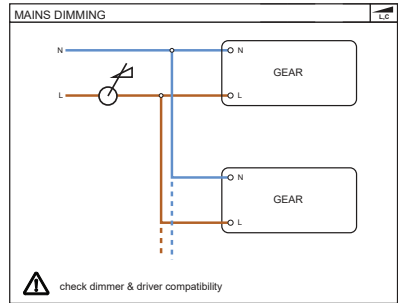

⚡

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

⚡

PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

CAN BE USED WITH:
Smart 115 (IP*) LED GE

CAN NOT BE USED WITH:
Smart 115 adjustable LED GE
Smart 115 adjustable warmdim LED GE

*in combination with Smart Surface Tubed suspension = IP20

220-230V
50-60Hz

↑

L, C

DALI

PUSH

1-10V

IP 20

UK CA

CE