


## Marbul suspension track LED Casambi GI

135016XX-B1\_135017XX-B1\_135018XX-B1

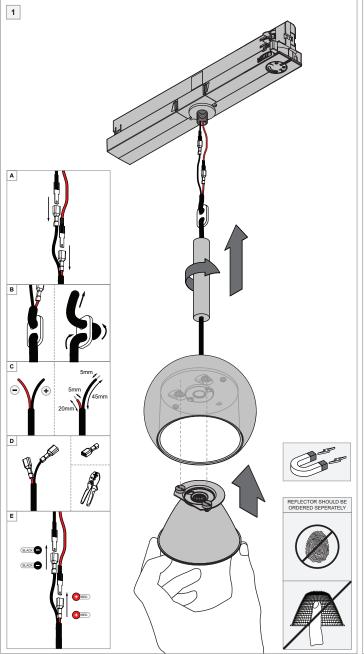

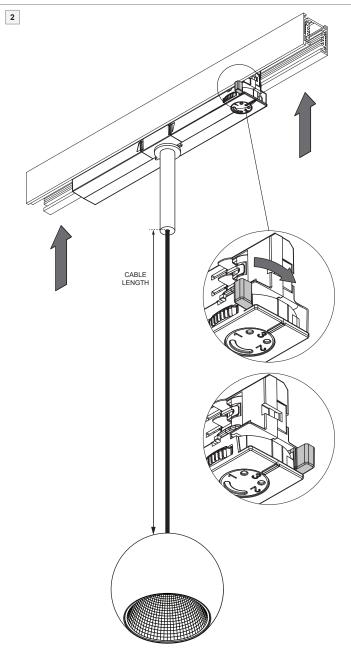

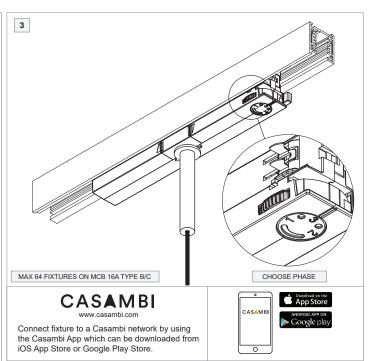

Surrounding materials , obstructions (walls, concrete, metal,...) and other wireless signals can have a negative influence on the casambi wireless signal range. Always check on site circumstances for optimal signal quality.

## COMBINE WITH MODULAR 230V TRACK COMPONENTS

Consult Modular Lighting Instruments website or catalogue for overview track components. Fixture is also compatible with following track systems

25-XX-XX / 26-XX-XX Eutrac 6771-6774 6779-6782 iGuzzini Lumisys Unipro Lumisys Unipro

7501 / 7511 / 7512 T32 / T33 /34

Nordic Aluminium Global Trac Pro XTS 4xxx Nordic Aluminium Global Trac Pro XTSF 4xxx Zumtobel

OMNITRACK ONETRACK PRO-0610 Powergear Unipro Unipro T32FW



## LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



## PREVENTING ELECTROSTATIC DAMAGE

220-230V

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.









