


EXTRUDED LED WD GE

135202XX_135205XX_135208XX

EXTRUDED LED MODULE

COMPATIBLE WITH:

- SUSPENSION KIT SEMI-RECESSED GE : 135230XX
- SUSPENSION KIT SURFACE GE : 135231XX
- SUSPENSION KIT SURFACE TRE DIM GI WARM DIM : 135236XX

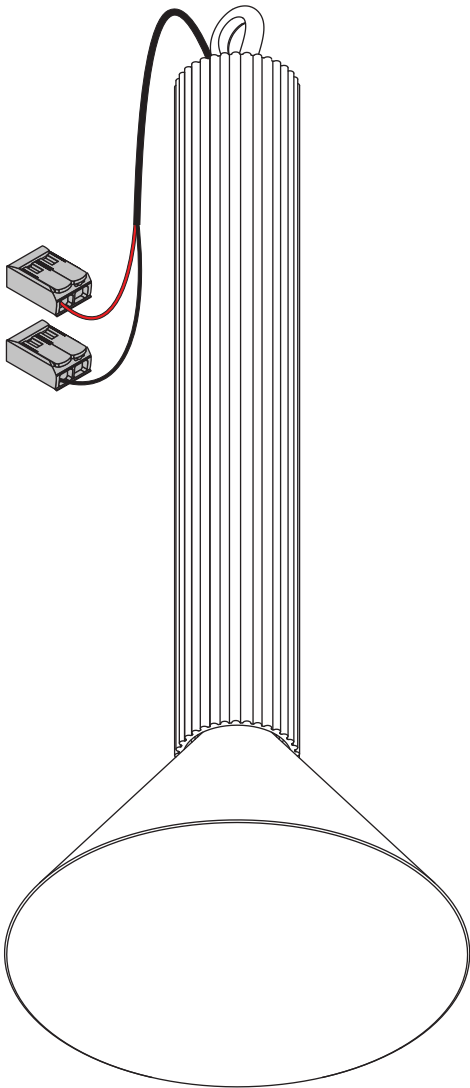

WARM DIM

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	15,5	18,5	6
For serial connection, respect polarity!			
+ RED		- BLACK	



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1014810



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.




PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

EXTRUDED CEILING SOLUTIONS - NOT INCLUDED


OPTION 1 SUSPENSION KIT SEMI-RECESSED GE

Ø89mm H3.5mm



OPTION 2 SUSPENSION KIT SURFACE GE

Ø70mm H48mm

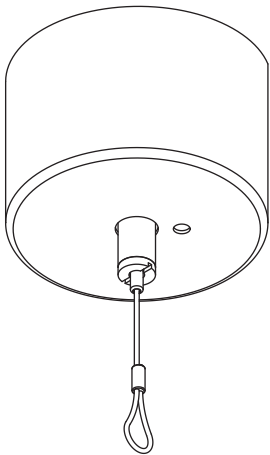

OPTION 3 SUSPENSION KIT SURFACE TRE DIM GI WARM DIM

Ø170mm H37mm

