

Description

Non-directional, cone-shaped recessed luminaire with COB LED technology. Available in 3 different designs: curved, sharp or bevelled. The 7 mm unit edge is hardly visible. Also available in a IP55 certified version for damp indoor areas. The luminaire can be combined with a surface-mounted tube and a square or rectangular housing to create a surface-mounted luminaire. In addition, it can also be combined with a square or rectangular finishing plate, thus transforming the round recessed luminaire to a square recessed luminaire.

Materials

- Aluminium front ring finished in fine-textured scratch-resistant fine-textured powder coating or matt white. Also available in wet coating matt gold finish, or in ano-look brushed silver bronze, bronze, black or champagne
- Aluminium heatsink, bionic shaped for optimal heat dissipation
- High-gloss aluminium reflectors
- Stainless steel leaf springs
- Clear safety diffuser in polycarbonate (for the IP55 version)

Technical characteristics

- Dimensions: 82 mm (ø) x 52 mm (H)
- Reflectors: spot (15°), medium (25°), flood (40°)
- COB high-power LED
- Colour temperature: 2700 K, 3000 K, 4000 K or warmdim (1800-3000K) (3500 K available on request)
- CRI 90+
- 3 SDCM
- Luminaire output: 980 lm (for 3000 K medium, bevelled design in white)
- Luminaire efficiency: 93%
- Power consumption: 9.2 W per LED module (@500 mA)
- UGR 17
- Powered by electronic LED drivers: choose from driver matrix
- Warranty period: 5 years on LED lamps, 2 years on drivers
- Class 3
- Use: indoor

Installation





- Recessed mounting in ceiling or wall. Recess dimensions: ø70 mm, H 60 mm. Fixation by means of leaf springs. Unit must not be covered with insulation.
- Electrical connection: connection to LED driver via two splicing connectors (included with product).
- The recessed luminaire can be combined with a mounting ring for trimless installation (ø82).
- The recessed luminaire can be combined with a perforated aluminium plasterplate (190 x 190, ø70 mm) or with a galvanised steel housing for recessed installation in concrete (190 x 192 x 130 mm).

Accessories

- Aluminium finishing plate, square (for 1 luminaire) or rectangular (for 2 luminaires), finished with fine-textured scratch-resistant powder coating in white, black or wet coating matt gold, or in ano-look brushed silver bronze, bronze, black or champagne
- Square (for 1 unit) or rectangular (for 2 units) surface mounting accessory (available with or without built-in LED driver), combined with square or rectangular finishing plate recessed by 10 mm in the dispatched in the housing. Surface mounting housing finished in scratch-resistant fine-textured powder coating in white or black.
- Cylindrical surface mounting housing without built-in driver (ø86, height 86 mm) or with built-in electronic LED driver (ø86, height 130 mm).
- Recessed housing for concrete (conbox)
- Plasterplate for plasterboard (gypkit)

Standards and directives:

- 2006/95/EC - Low Voltage Directive
- 2004/108/EC - EMC Directive
- 2011/65/EU - RoHS Directive
- 2009/125/EC - Ecodesign Directive
- 245/2009/EC + 347/2010/EU - Ecodesign Directive
- 1194/2012/EU - Ecodesign Regulation
- EN 60598-1:2008 +A1:2009 - Luminaires. General requirements and tests
- EN 62471:2008 - Photobiological safety of LED lamps and lamp systems
- EN 62493: 2010 - Assessment of lighting equipment related to human exposure to electromagnetic fields
- EN 60598-2-2:2012 - Recessed luminaires
- EN 55015:2006 +A1:2007 +A2:2009 - Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
- EN 61000-3-2:2006 +A1,A2:2009 - Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)
- EN 61000-3-3:2013 - Limitation of voltage changes, voltage fluctuations and flicker in public low voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
- EN 61547:2009 - EMC Immunity Requirements
- EN 50581:2012 - Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances

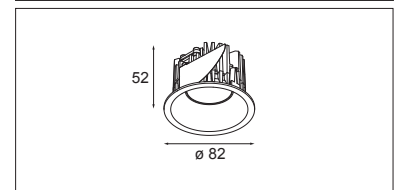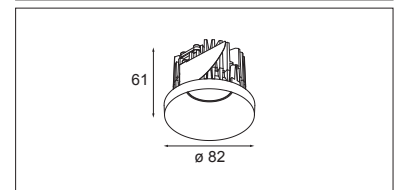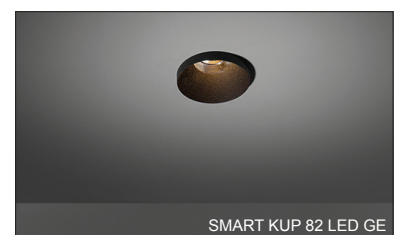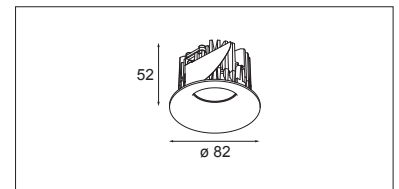

Standards and directives:

- 2006/95/EC - Low Voltage Directive
- 2004/108/EC - EMC Directive
- 2011/65/EU - RoHS Directive
- 2009/125/EC - ECODesign Directive
- 245/2009/EC + 347/2010/EU - ECODesign Directive
- 1194/2012/EU - ECODesign Regulation
- EN 60598-1:2008 +A11:2009 - Luminaires. General requirements and tests
- EN 62471:2008 - Photobiological safety of LED lamps and lamp systems
- EN 62493: 2010 - Assessment of lighting equipment related to human exposure to electromagnetic fields
- EN 60598-2-2:2012 - Recessed luminaires
- EN 55015:2006 +A1:2007 +A2:2009 - Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
- EN 61000-3-2:2006 +A1,A2:2009 - Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)
- EN 61000-3-3:2013 - Limitation of voltage changes, voltage fluctuations and flicker in public low voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
- EN 61547:2009 - EMC Immunity Requirements
- EN 50581:2012 - Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances