


LED driver 350-700mA 12W dali


13551430

WIRING DIAGRAM



⚠ SERIAL CONNECTION, RESPECT POLARITY

DRIVER WITH 1 x LED OUTPUT

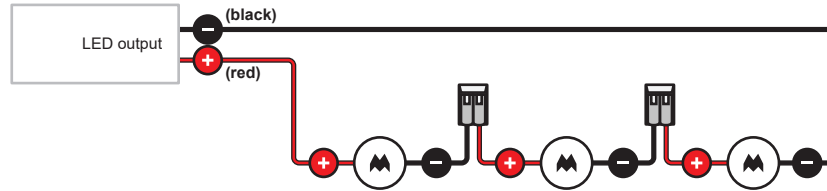

ELECTRICAL CHARACTERISTICS

NOMINAL INPUT VOLTAGE RANGE AC
100 - 240V

INPUT FREQUENCY RANGE
50...60HZ

MAXIMUM OUTPUT POWER
12W


TEMPERATURE
Tc = 75°C
Ta = -30...+50°C

EFFICIENCY AT FULL LOAD
81%


TYPICAL CURRENT OUTPUT RIPPLE
≤ 1%

MAXIMUM DRIVERS ON MCB 16A TYPE B
16

DIMENSIONS

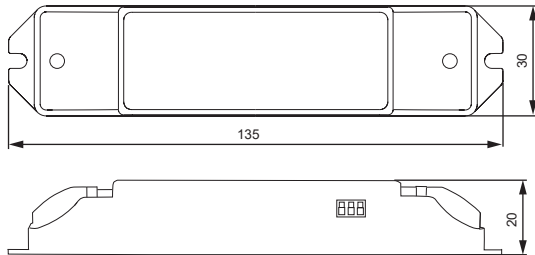

MINIMUM HEIGHT TO TILT IN DRIVER

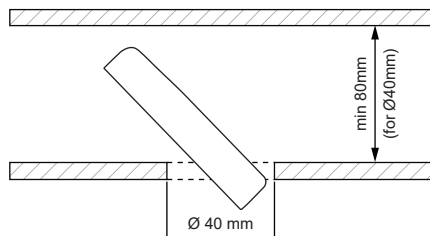

OPERATING WINDOW

350mA	3.5 - 8.4W	10-24Vdc	ON OFF	1 2 3
500mA	5 - 12W	10-24Vdc	ON OFF	1 2 3
700mA	7 - 12W	10-17Vdc	ON OFF	1 2 3

OPERATING MODE

- Dimming interface: DALI 2
- 0.01% dimming depth

FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

