


# LED driver DEEP DIM 250mA-350mA-500mA-700mA 20W 0/1-10V


11630330\_11630430\_11630530\_11631330

## WIRING DIAGRAM



**⚠ SERIAL CONNECTION, RESPECT POLARITY**

DRIVER WITH 1 x LED OUTPUT

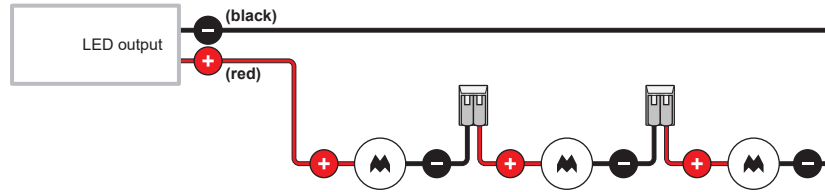

## ELECTRICAL CHARACTERISTICS

**NOMINAL INPUT VOLTAGE RANGE AC**  
220 - 240V

**FREQUENCY**  
47...53HZ

**AC OPERATING RANGE**  
198 - 264 V

**DC OPERATING RANGE**  
176 - 250 V DC


**MAXIMUM OUTPUT POWER**  
0 + 20 W

**TEMPERATURE**  
T<sub>c</sub> = 80°C  
T<sub>a</sub> = -20...+50°C


**EFFICIENCY AT FULL LOAD**  
80%

**MAXIMUM DRIVERS ON MCB 16A TYPE B**  
106

## DIMENSIONS

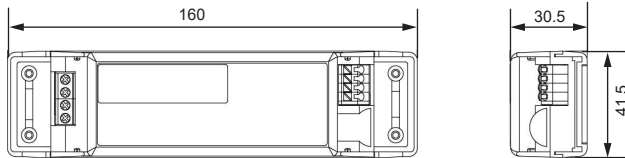

## MINIMUM HEIGHT TO TILT IN DRIVER

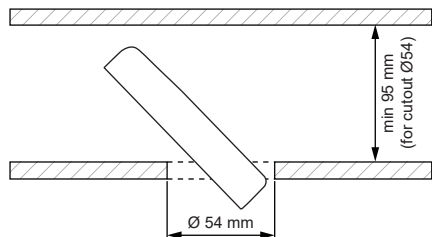

## OPERATING WINDOW

### OPERATING WINDOW

250mA	20W	2-40VDC	11631330
350mA	20W	2-40VDC	11630330
500mA	20W	2-40VDC	11630430
700mA	20W	2-28.5VDC	11630530

Technical datasheet available on request

## FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check [www.supermodular.com](http://www.supermodular.com) or connect with your sales contact.

