


LED driver DEEP DIM 350mA-500mA-700mA 20W 0/1-10V


11630330_11630430_11630530

WIRING DIAGRAM



⚠ SERIAL CONNECTION, RESPECT POLARITY

DRIVER WITH 1 x LED OUTPUT

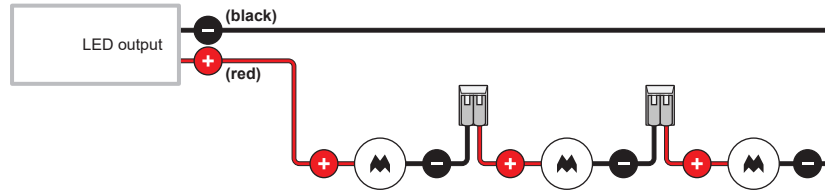

ELECTRICAL CHARACTERISTICS

NOMINAL INPUT VOLTAGE RANGE AC
220 - 240V

FREQUENCY
47...53HZ

AC OPERATING RANGE
198 ÷ 264 V

DC OPERATING RANGE
none


MAXIMUM OUTPUT POWER
0 ÷ 20 W

TEMPERATURE
T_c = 80°C
T_a = -20...+50°C


EFFICIENCY AT FULL LOAD
80%

MAXIMUM DRIVERS ON MCB 16A TYPE B
106

DIMENSIONS

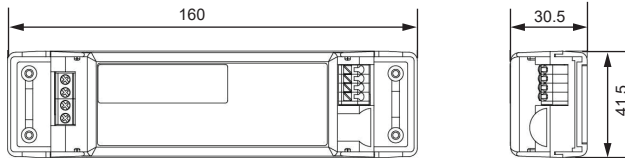

MINIMUM HEIGHT TO TILT IN DRIVER

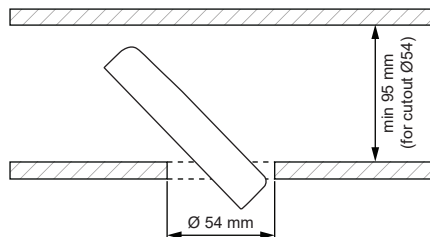

OPERATING WINDOW

OPERATING WINDOW

350mA	20W	2-40VDC
500mA	20W	2-40VDC
700mA	20W	2-28.5VDC

Technical datasheet available on request

FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

