


# LED driver Deep Dim 350-700mA 15W Tre dim


11631430

## WIRING DIAGRAM



**! SERIAL CONNECTION, RESPECT POLARITY**

**DRIVER WITH 1 x LED OUTPUT**

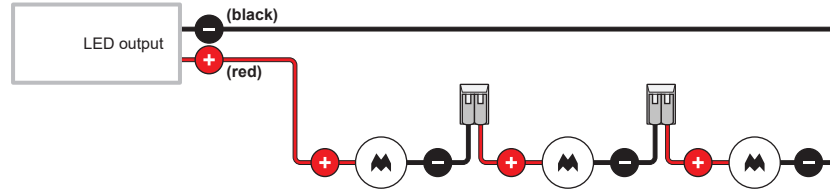

## ELECTRICAL CHARACTERISTICS

**NOMINAL INPUT VOLTAGE RANGE AC**

220 - 240V

**INPUT FREQUENCY RANGE**

50...60HZ

**MAXIMUM OUTPUT POWER**

15W

**DC OPERATING RANGE**

none

**TEMPERATURE**

T<sub>c</sub> = 90°C

T<sub>a</sub> = -20...+45°C

**EFFICIENCY AT FULL LOAD**

70%

**TYPICAL CURRENT OUTPUT RIPPLE**

≤ 3%

**MAXIMUM DRIVERS ON MCB 16A TYPE B**

8

**REFERENCE NORMS**

EN 55015

EN 61000-3-2

EN 61000-3-3

EN 61347-1


EN 61347-2-13

EN 61547


EN 62384

Technical datasheet available on request

## DIMENSIONS



## MINIMUM HEIGHT TO TILT IN DRIVER

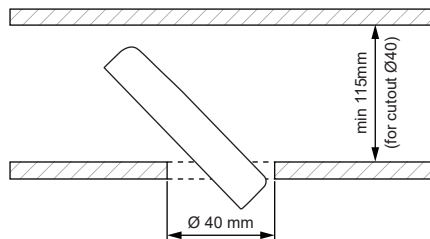

## OPERATING WINDOW

<b>350mA</b>	3.5 - 15W	9-42Vdc	ON OFF	1	2	3
<b>500mA</b>	4.5 - 15W	9-30Vdc	ON OFF	1	2	3
<b>700mA</b>	6.3 - 15W	9-21.5Vdc	ON OFF	1	2	3

## OPERATING MODE

- Dimming interface: Trailing Edge dimmable
- 0,01% dimming depth
- Soft-on and fade-in dimming

## FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check [www.supermodular.com](http://www.supermodular.com) or connect with your sales contact.

