



# LED driver 48V 150W - DIN RAIL

13551530

## WIRING DIAGRAM

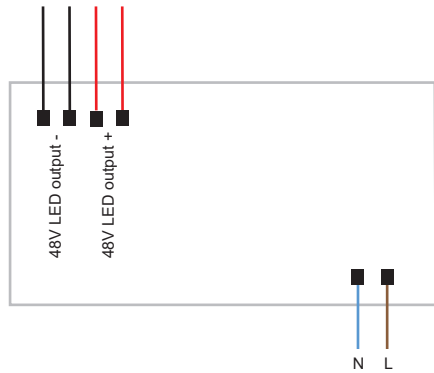

## DRIVER WITH 2 x 48V LED OUTPUT

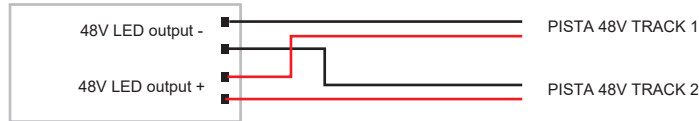

**POWER LED OUTPUT 1 + LED OUTPUT 2 = MAX. 150W**

## ELECTRICAL CHARACTERISTICS

### NOMINAL INPUT VOLTAGE RANGE AC

85 - 264VAC

### INPUT FREQUENCY RANGE

47...63HZ

### MAXIMUM OUTPUT POWER

150W

### TEMPERATURE

Tc = 70°C

Ta = max. 45°C

### EFFICIENCY AT FULL LOAD

90.5%



### TYPICAL VOLTAGE OUTPUT RIPPLE

200mVp-p

### MAXIMUM DRIVERS ON MCB 16A TYPE B

1

## DIMENSIONS

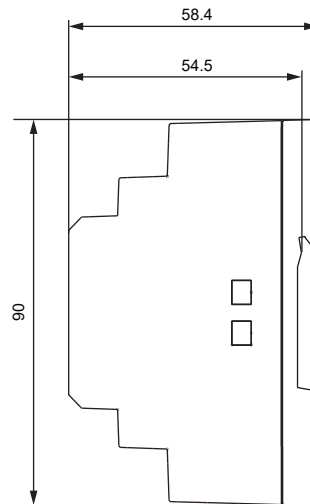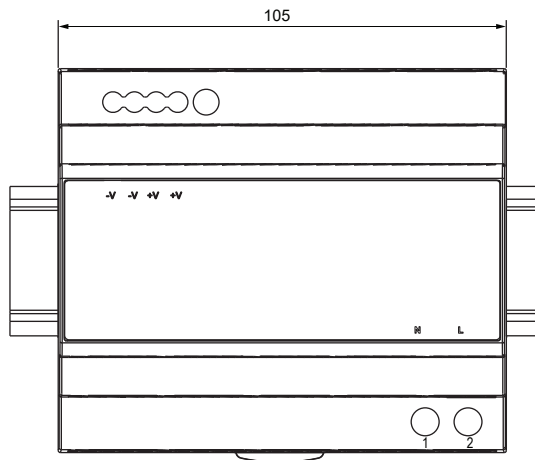

## OPERATING WINDOW

### OPERATING MODE

- 2 x 48V DC LED output
- Non dimmable
- Max. 150W total load
- Max. 150W load per output

## FIXTURES & ACCESSORIES

For latest version of driver matrix and available accessories check [www.supermodular.com](http://www.supermodular.com) or connect with your sales contact.

