

Kompas Ceiling Base Ø340 350mA / 500mA 50W 1-10V / DALI


135709XX_135710XX_135712XX_135713XX

Scan for installation video or go to
supermodular.com/en/kompas-round-surface/




1 REMOVE COVER AND MOUNT ON CEILING

220-230V
50-60Hz
N ⊕ L







SCREWS NOT INCLUDED



max
Ø5,5 mm



max
Ø9,5 mm

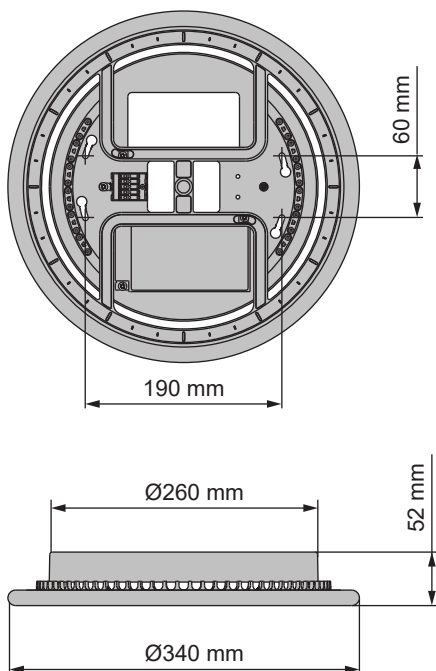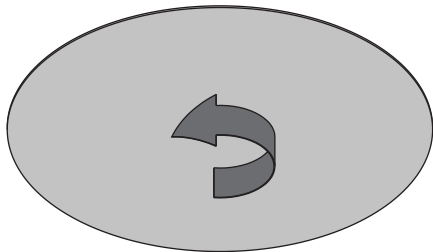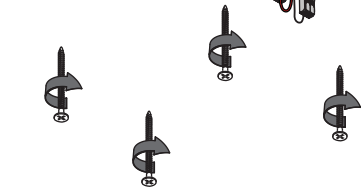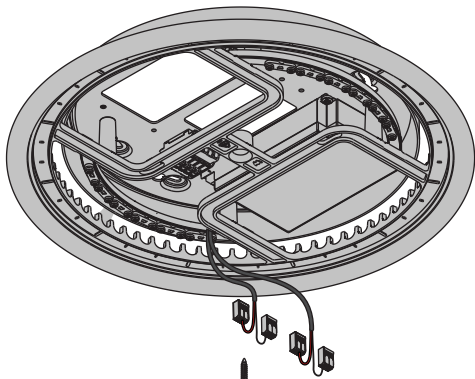

2 CONNECT PRIMARY WIRES

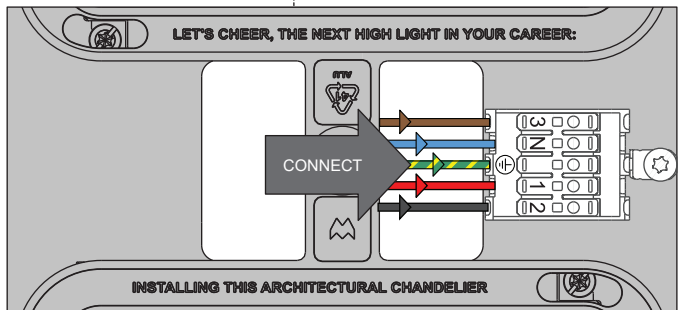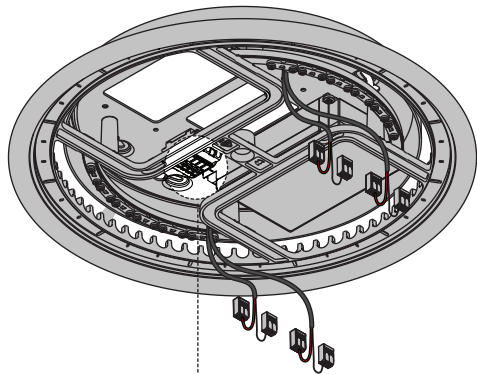

L	LINE	
N	NEUTRAL	
⊕	GROUND	
DIM +	DALI or 1-10V +	
DIM -	DALI or 1-10V -	

9mm
0,5 - 2,5mm²
20 - 14 AWG



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.



Kompas Ceiling Base Ø340 350mA / 500mA 50W 1-10V / DALI

135709XX_135710XX_135712XX_135713XX

3 CHECK MAX FIXTURES TOTAL \ LED OUTPUT

	Fixture for Kompas	Extra	350mA		500mA	
			Includes 1 driver 50W 1.5 - 55 Vf 350mA		Includes 1 driver 50W 1.5 - 55 Vf 500mA	
			Max Fixtures Total	Max Fixtures Per LED Output In Series	Max Fixtures Total	Max Fixtures Per LED Output In Series
MONOCOLOR	Extruded GE		6	3	4	2
	Marbul Susp Fix		6	3	4	2
	Marbul Susp Adj					
	Minude		6	3	4	2
	Placebo Down	+ optional shade	6	3	not compatible use 350mA version	
	Placebo Up		6	3		
	Smart Ball 82	+ Smart 82	6	3	4	2
		+ Smart 82 Adjustable				
	Smart Ball 115	+ Smart 115	2	1	2	1
		+ Smart 115 Adj	6	3	4	2
	Smart Tubed Suspension 48 GE	+ Smart 48	12	6	12	6
		+ Smart 48+	12	6	10	5
	Smart Tubed Suspension 82 L / XL GE	+ Smart 82	6	3	4	2
		+ Smart 82 Adj				
Smart Tubed Suspension 115 GE	+ Smart 115	2	1	2	1	
	+ Smart 115 Adj	6	3	4	2	
WARM DIM	Extruded WD GE		4	2	not compatible use 350mA version	
	Marbul Susp Fix Warm Dim		2	1		
	Marbul Susp Adj Warm Dim					
	Placebo Down Warm Dim	+ optional shade	4	2		
	Placebo Up Warm Dim					
	Smart Ball 82	+ Smart 82 Warm Dim	6	3		
		+ Smart 82 Adj Warm Dim				
	Smart Ball 115	+ Smart 115 Adj Warm Dim	2	1		
	Smart Tubed Suspension 48 GE	+ Smart 48 Warm Dim	-	-		
	Smart Tubed Suspension 82 L / XL GE	+ Smart 82 Warm Dim	6	3		
		+ Smart 82 Adj Warm Dim				
Smart Tubed Suspension 115 GE	+ Smart 115 Adj Warm Dim	2	1			


4 CONNECT FIXTURES FOR KOMPAS

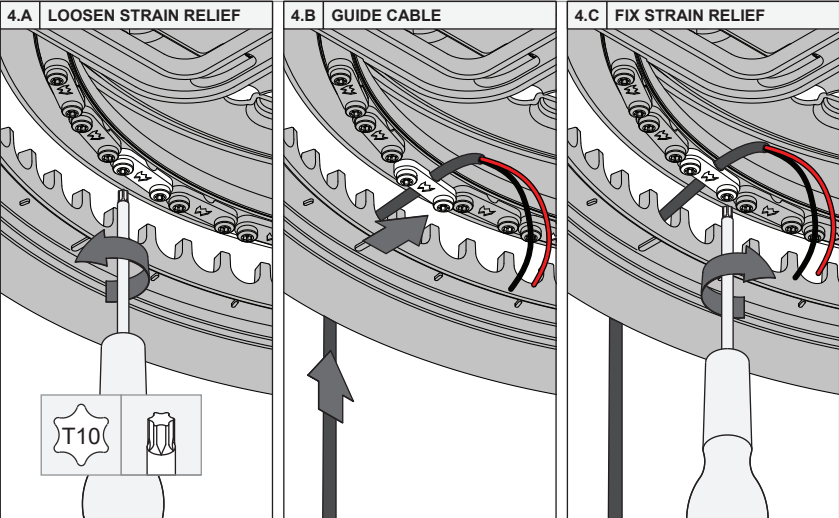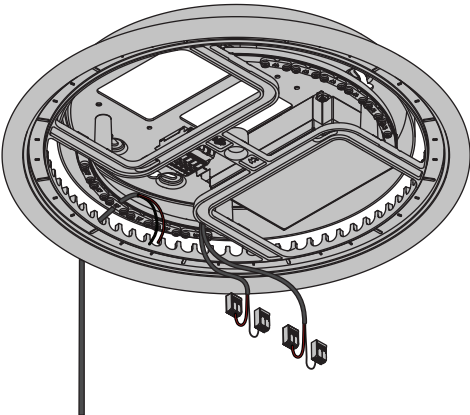


Kompas Ceiling Base Ø340 350mA / 500mA 50W 1-10V / DALI

135709XX_135710XX_135712XX_135713XX

5 CONNECT SECONDARY WIRES - SERIAL CONNECTION

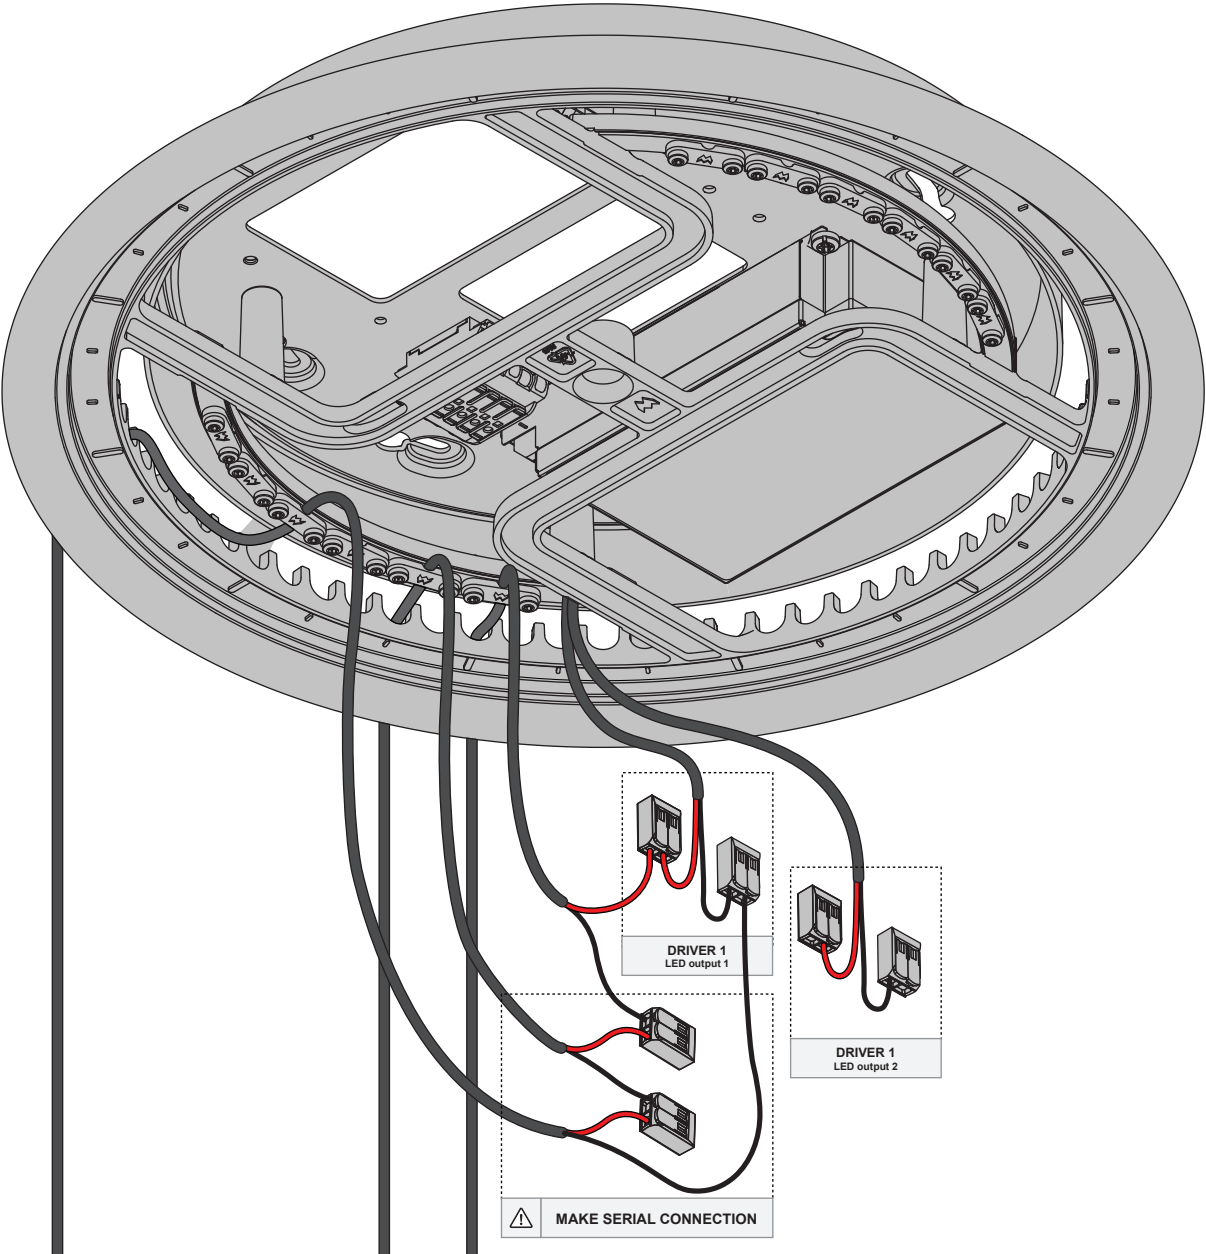

6 CLOSE COVER

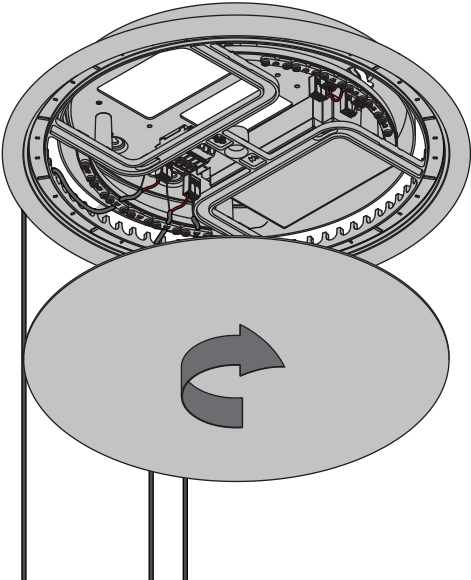

7 FINISHED

