


Date
Customer
Project
Type

## *SLD50 High Suspended*

If more powerful light combined with same brilliant esthetics is your desire, SLD50 High fulfills it. Perfect for a space in which users require an extra degree of visual comfort. Its deep recessed light units provide powerful luminance, the perfect fit for an office looking to add architectural feel to its ambiance. Available in various anodised colours, trimless, in a surface-mounted, suspended and recessed version, and with flange, for the recessed version only.




SLD50 HIGH SUSPENDED - SILVER BRONZE

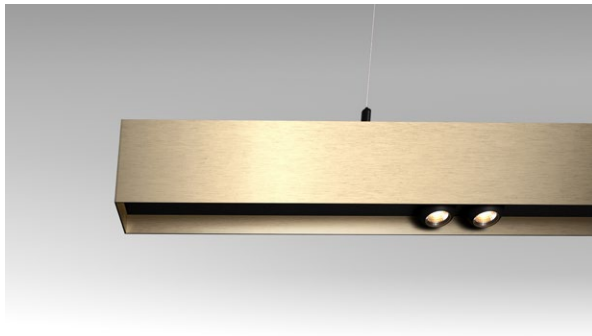


SLD50 HIGH SUSPENDED - CHAMPAGNE



SLD50 HIGH SUSPENDED - BLACK STRUCTURE

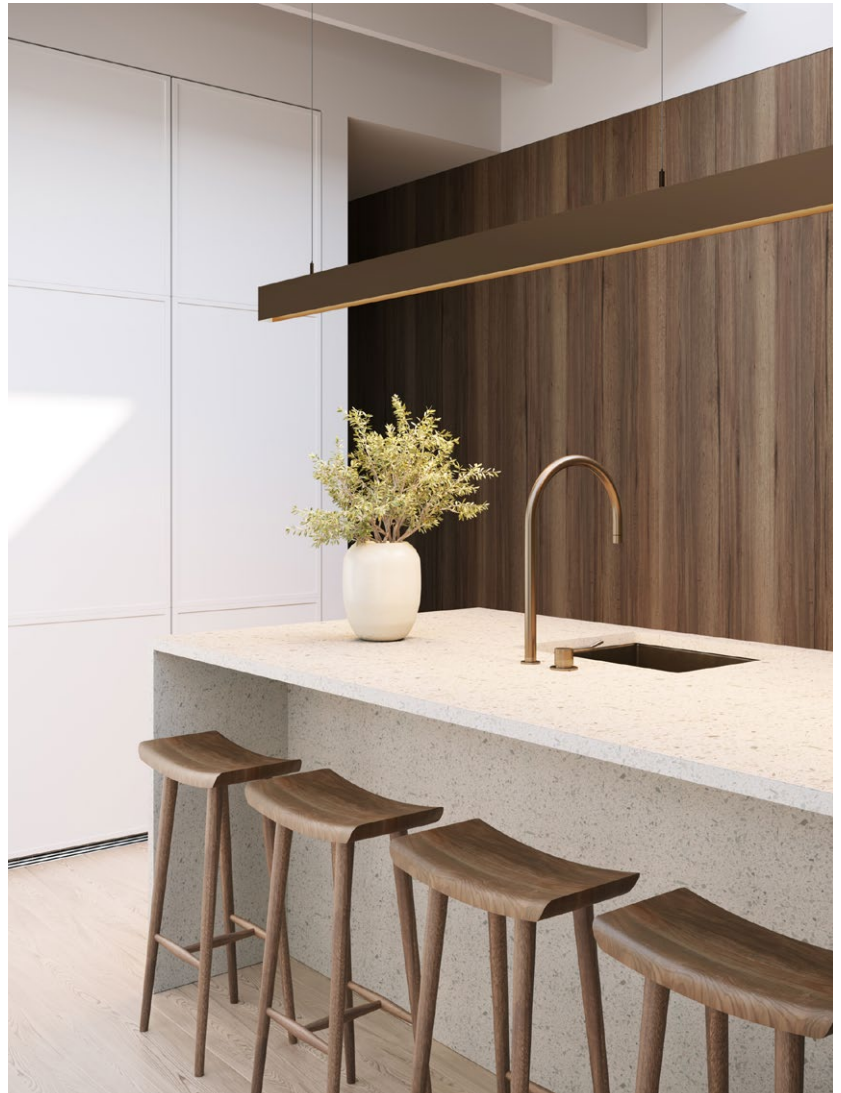

## SLD50 High Suspended

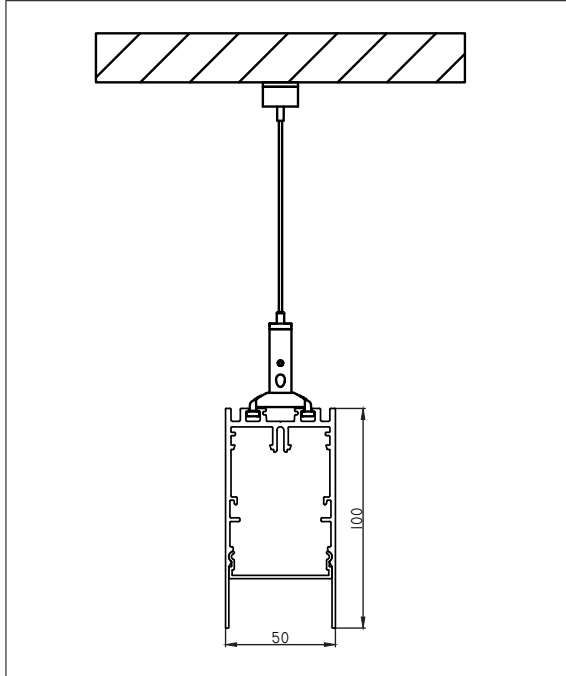

### Base Profile

Dimensions	100mm x 50mm (h x w)
Base thickness	1.5mm
Mounting	Ceiling suspended
Indoor/Outdoor	Indoor
Finish*	Anodised: aluminium Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years

### Profile Cover

Finish*	Anodised: aluminium Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white
---------	---

\* not all colour combinations are possible, please refer to our configurator to see matching colours

### Diffusor

Type	Polycarbonate Prismatic polycarbonate
------	--

### Lighting Modules

#### Linear Lighting module

LED type	High power LED line
Colour temperature	2700K, 3000K, 4000K, 2700K-6500K tunable white
Dimming	Non-dimmable, Dali/Pushdim Available in preset dimmed version 50%

#### Spot Lighting module

LED type	LED Array
Adjustability	h 360° v -30°/+30°
Beam angle	Medium (25°), Flood (40°)
Colour temperature	2700K, 3000K, 4000K
Dimming	Trailing edge, 1-10V, Dali/Pushdim

#### Linear LED Strip 24V Uplight

LED type	LED Strip - diffusor included
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, 1-10V, Dali/Pushdim

### Finish Information



aluminium  
(anodised)



bronze  
(brushed anodised)




champagne  
(brushed anodised)



silver bronze  
(brushed anodised)




black structure  
(powder coating)




white structure  
(powder coating)

**Base Profile**




- 93590005** SLD50 HIGH PROFILE ALU/M
- 93590018** SLD50 HIGH PROFILE ANO BRONZE/M
- 93590041** SLD50 HIGH PROFILE CHAMPAGNE/M
- 93590006** SLD50 HIGH PROFILE ANO SILVER BRONZE/M
- 93590032** SLD50 HIGH PROFILE BLACK STRUC/M
- 93590009** SLD50 HIGH PROFILE WHITE STRUC/M

**Profile Cover**




- 93560205** SLD50 COVER ALU/M
- 93560218** SLD50 COVER ANO BRONZE/M
- 93560241** SLD50 COVER CHAMPAGNE/M
- 93560206** SLD50 COVER ANO SILVER BRONZE/M
- 93560232** SLD50 COVER BLACK STRUC/M
- 93560209** SLD50 COVER WHITE STRUC/M

**Diffusor**




- 93560000** SLD50 POLY IN/M
- 93560200** SLD50 PRISMATIC POLY IN/M

**Endplate**




- 93590205** SLD50 HIGH ENDPLATE ALU
- 93590218** SLD50 HIGH ENDPLATE ANO BRONZE
- 93590241** SLD50 HIGH ENDPLATE CHAMPAGNE
- 93590206** SLD50 HIGH ENDPLATE ANO SILVER BRONZE
- 93590232** SLD50 HIGH ENDPLATE BLACK STRUC
- 93590209** SLD50 HIGH ENDPLATE WHITE STRUC

**Connection**




- 93590054** SLD50 HIGH CONNECTION 180° 3-5P
- 93590056** SLD50 HIGH CONNECTION 180° 6-9P




- 93590055** SLD50 HIGH CONNECTION 90° 3-5P
- 93590057** SLD50 HIGH CONNECTION 90° 6-9P

**Fixation / Mounting**




- 93560805** SLD50 SUSPENSION 4M ALU
- 93560832** SLD50 SUSPENSION 4M BLACK STRUC
- 93560809** SLD50 SUSPENSION 4M WHITE STRUC




- 93001005** HINGE FOR LOW CONE ALU
- 93001032** HINGE FOR LOW CONE BLACK STRUC
- 93001009** HINGE FOR LOW CONE WHITE STRUC


**Electrical Supply**




- 93590052** SLD50 HIGH HOLE FOR POWER SUPPLY 3-5P
- 93590053** SLD50 HIGH HOLE FOR POWER SUPPLY 6-9P




- 93002003** POWER FEED KIT 2M 3X1.5MM<sup>2</sup> ALU
- 93003203** POWER FEED KIT 2M 3X1.5MM<sup>2</sup> BLACK STRUC
- 93002903** POWER FEED KIT 2M 3X1.5MM<sup>2</sup> WHITE STRUC
- 93002005** POWER FEED KIT 2M 5X1.5MM<sup>2</sup> ALU
- 93003205** POWER FEED KIT 2M 5X1.5MM<sup>2</sup> BLACK STRUC
- 93002905** POWER FEED KIT 2M 5X1.5MM<sup>2</sup> WHITE STRUC
- 93003303** POWER FEED KIT 2M 6X0.75 ALU
- 93003305** POWER FEED KIT 2M 6X0.75 BLACK STRUC
- 93003304** POWER FEED KIT 2M 6X0.75 WHITE STRUC




- 93003906** POWER FEED KIT 2M 9X0.75MM<sup>2</sup> ALU
- 93003908** POWER FEED KIT 2M 9X0.75MM<sup>2</sup> BLACK STRUC
- 93003907** POWER FEED KIT 2M 9X0.75MM<sup>2</sup> WHITE STRUC



- 93002151** CONNECTION BOX 3P FOR TRANSPARANT CABLE ALU
- 93003151** CONNECTION BOX 3P FOR TRANSPARANT CABLE BLACK STRUC
- 93002951** CONNECTION BOX 3P FOR TRANSPARANT CABLE WHITE STRUC
- 93002251** CONNECTION BOX 5P FOR TRANSPARANT CABLE ALU
- 93003251** CONNECTION BOX 5P FOR TRANSPARANT CABLE BLACK STRUC
- 93003951** CONNECTION BOX 5P FOR TRANSPARANT CABLE WHITE STRUC
- 93003451** CONNECTION BOX 6P FOR TRANSPARENT CABLE ALU
- 93003651** CONNECTION BOX 6P FOR TRANSPARENT CABLE BLACK STRUC
- 93003551** CONNECTION BOX 6P FOR TRANSPARENT CABLE WHITE STRUC




- 93005051** CONNECTION BOX 9P FOR TRANSPARENT CABLE ALU
- 93005251** CONNECTION BOX 9P FOR TRANSPARENT CABLE BLACK STRUC
- 93005151** CONNECTION BOX 9P FOR TRANSPARENT CABLE WHITE STRUC



- 93002152** TRANSPARANT CABLE 3X1.5MM<sup>2</sup>/M
- 93002252** TRANSPARANT CABLE 5X1.5MM<sup>2</sup>/M
- 93003452** TRANSPARANT CABLE 6X0.75MM<sup>2</sup>/M
- 93003552** TRANSPARANT CABLE 9X0.75MM<sup>2</sup>/M

**Supplements**

- 93000101** RAL SET UP CHARGE
- 93560150** SLD50 RAL SUPPL. PROFILE/M
- 93560152** SLD50 RAL SUPPL. COVER/M
- 93560151** SLD50 RAL SUPPL. ENDPLATE
- 93001000** RAL SUPPL. HINGE
- 93002053** RAL SUPPL. POWERFEED KIT / CONNECTION BOX
- 93002000** SUPPL. EXTRA CIRCUIT /M (2 STANDARD)



NON-DIM	-3-----
DALI/PUSHDIM	-8-----

### Linear LED Fortimo LEDline

	2700K	3000K	4000K	2700K-6500K	Module length (mm)
2x	9X591002	9X592002	9X593002	-	560
3x	9X591003	9X592003	9X593003	98564303	840
4x	9X591004	9X592004	9X593004	98564304	1120
5x	9X591005	9X592005	9X593005	98564305	1400
6x	9X591006**	9X592006**	9X593006**	98564306	1680
7x	9X591007**	9X592007**	9X593007**	-	1960

### Linear LED Fortimo LEDline Preset 50%

	2700K	3000K	4000K	Module length (mm)
3x	9X594003	9X595003	9X596003	840
4x	9X594004	9X595004	9X596004	1120
5x	9X594005	9X595005	9X596005	1400
6x	9X594006**	9X595006**	9X596006**	1680
7x	9X594007**	9X595007**	9X596007**	1960

Lamp type	MED POWER LED
Delivered lumens	1821lm/m (2700K) 1781lm/m (3000K) 2078lm/m (4000K) 1781lm/m (Tunable White @2700K) 1801lm/m (Tunable White @6500K)
Connected load*	29W/m 28W/m (Tunable White @2700K) 25W/m (Tunable White @6500K)
Efficacy*	61lm/W 63lm/W (Tunable White @2700K) 72lm/W (Tunable White @6500K)
UGR*	21
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.

\* values for poly


Lamp type	MED POWER LED
Delivered lumens	1108lm/m (2700K) 1082lm/m (3000K) 1263lm/m (4000K)
Connected load*	17W/m
Efficacy*	64lm/W
UGR*	19
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.

\* values for poly in @3000K

#### SUPPLEMENTS

\*\*93551011 PROFILE EMERGENCY PACK 3H

## SLD50 High Suspended



NON-DIM	-3-----
DALI/PUSHDIM	-8-----

### Linear LED Fortimo LEDline + lens 50°

	2700K	3000K	4000K	Module length (mm)
2x	9X591102	9X592102	9X593102	560
3x	9X591103	9X592103	9X593103	840
4x	9X591104	9X592104	9X593104	1120
5x	9X591105	9X592105	9X593105	1400
6x	9X591106**	9X592106**	9X593106**	1680
7x	9X591107**	9X592107**	9X593107**	1960

### Linear LED Fortimo LEDline Preset 50% + lens 50°

	2700K	3000K	4000K	Module length (mm)
3x	9X594103	9X595103	9X596103	840
4x	9X594104	9X595104	9X596104	1120
5x	9X594105	9X595105	9X596105	1400
6x	9X594106**	9X595106**	9X596106**	1680
7x	9X594107**	9X595107**	9X596107**	1960

Lamp type	MED POWER LED
Delivered lumens	2544lm/m (2700K) 2487lm/m (3000K) 2900lm/m (4000K)
Connected load*	29W/m
Efficacy*	86lm/W
UGR*	16
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.
Remark	Combine with a prismatic poly clear to create an office compliant solution


\* values for lens 50° prismatic @3000K

Lamp type	MED POWER LED
Delivered lumens	1547lm/m (2700K) 1511lm/m (3000K) 1764lm/m (4000K)
Connected load*	17W/m
Efficacy*	89lm/W
UGR*	14
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.
Remark	Combine with a prismatic poly clear to create an office compliant solution

\* values for lens 50° prismatic @3000K

#### SUPPLEMENTS

\*\*93551011 PROFILE EMERGENCY PACK 3H



### Linear LED Strip 24V Uplight

#### 1000lm/m

	2700K	3000K	4000K
mounted/m	93000512	93000513	93000514

#### 2000lm/m

	2700K	3000K	4000K
mounted/m	93000010	93000011	93000012

#### 3600lm/m

	2700K	3000K	4000K
mounted/m	93000038	93000039	93000040


Lamp type	LED STRIP - diffuser included			
	1000lm/m	2000lm/m	3600lm/m	
Delivered lumens	2700K	806lm/m	1411lm/m	2482lm/m
	3000K	859lm/m	1441lm/m	2632lm/m
	4000K	781lm/m	1372lm/m	2763lm/m
Connected load	2700K	10.8W/m	18.9W/m	28W/m
	3000K	10.8W/m	18.9W/m	28W/m
	4000K	9.6W/m	16.6W/m	28W/m
Efficacy	2700K	75lm/W	75lm/W	89lm/W
	3000K	80lm/w	76lm/W	94lm/W
	4000K	81lm/W	83lm/W	99lm/W
Binning	3SDCM			
Lifetime	L80 B10 @50000hrs.			

#### DRIVERS

93009520	LED DRIVER 24V 60W
96009520	LED DRIVER 24V 60W 1-10V
96009560	LED DRIVER 24V 100W 1-10V
98009520	LED DRIVER 24V 100W DALI/PUSHDIM

#### SUPPLEMENTS

93560050	LED STRIP 24V CONNECTION
----------	--------------------------



*Eyeball 1x*

	2700K		3000K		4000K		Module length (mm)
	25°	40°	25°	40°	25°	40°	
black struc	93591332	93591232	93591532	93591432	93591732	93591632	60
white struc	93591309	93591209	93591509	93591409	93591709	93591609	60

Lamp type	1x LED ARRAY
Adjustability	h 360° v -30°/+30°
Delivered lumens	523lm (2700K) 544lm (3000K) 595lm (4000K)
Connected load*	7.5W
Binning	3SDCM
Lifetime	L80 B20 @50000hrs.
Remark	Order LED driver separately Only in combination with 'cover'

\* values for 25° white struc @3000K - driver incl.

DRIVERS		Module length
93567000	LED gear for eyeball 350mA 18W	150mm
96567000	LED gear for eyeball 350mA 15W 1-10V/pushdim	150mm
98567000	LED gear for eyeball 350mA 15W dali	150mm
97567000	LED gear for eyeball 350mA 40W 1-10V/pushdim/dali	335mm