
# Hipy 70 round / square anti glare LED GE

123740XX 123742XX 123744XX 123746XX



ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power
	min (Vf)	max (Vf)	(W)
350	7,5	9,5	3,0
• RED		BLACK	


For serial connection, respect polarity!


Not suited for connection to mains voltage.

Combine with a Modular LED-driver.

TO BE USED WITH

12379630 Renovation conbox ø73 H151 12379730 Renovation conbox 75x73x151 12379830 Conbox 145x75x123 12379930 Conbox 145x75x95

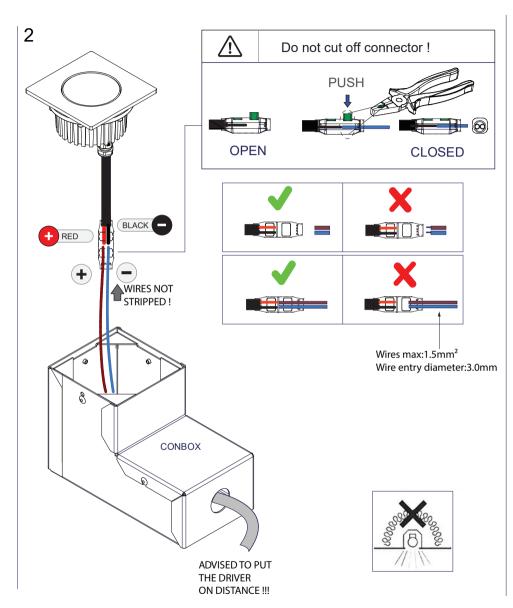



#### NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.

Reference number: 1000493



### LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



## PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

#### **DRIVERS & ACCESSORIES**

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

