


Hipy 70 round / square LED GE

123741XX_123743XX_123745XX_123747XX

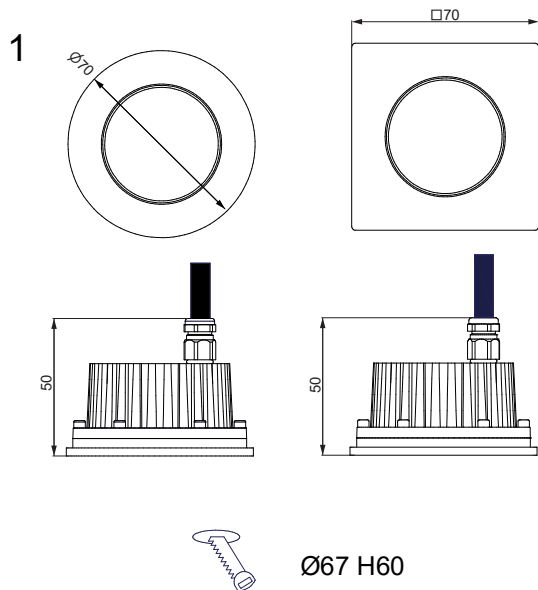


ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	7,5	9,5	3,0
+ RED		- BLACK	


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

TO BE USED WITH
12379630 Renovation conbox ø73 H151
12379730 Renovation conbox 75x73x151
12379830 Conbox 145x75x123
12379930 Conbox 145x75x95

2

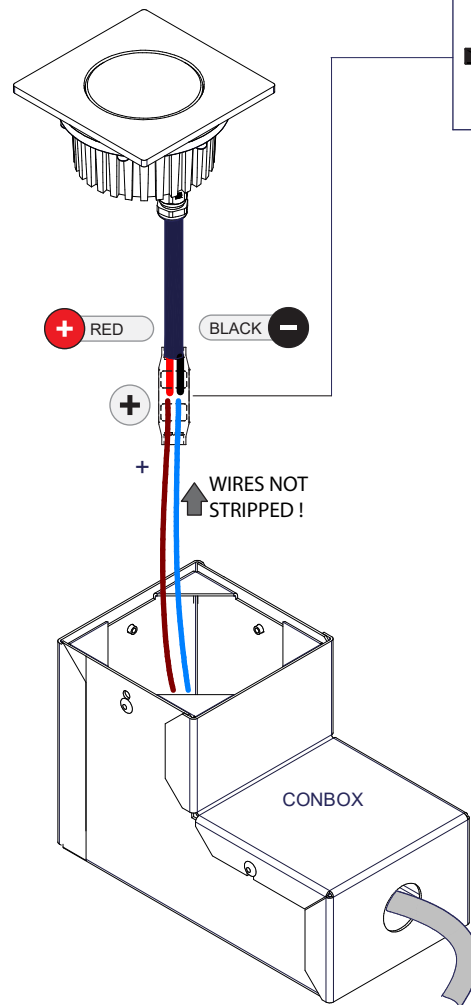


ADVISED TO PUT
THE DRIVER
ON DISTANCE !!!


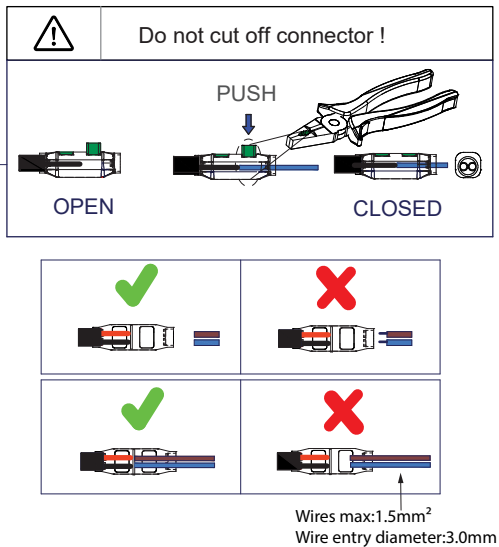


3

Max.static load 5886 Newton (600kg)
Max.surface temperature 60°C (140°F)

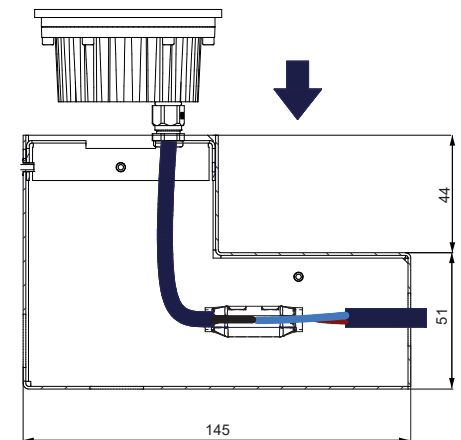

NOT SUITABLE FOR INSTALLATION
≤5KM FROM THE COAST

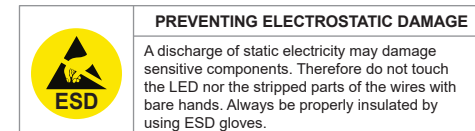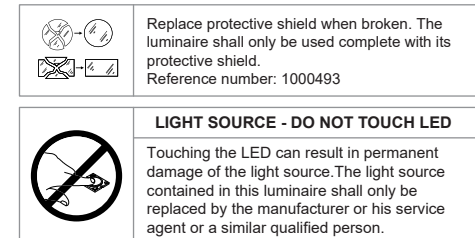

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

