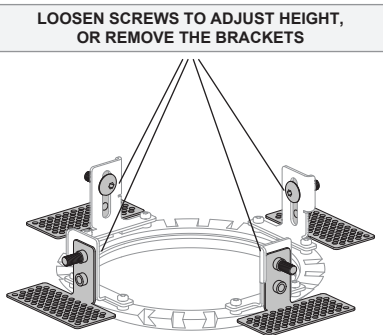


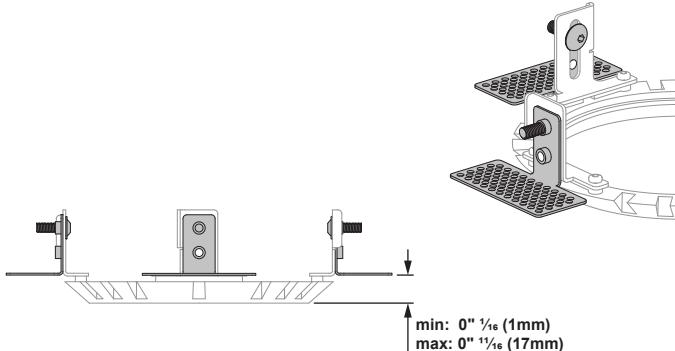

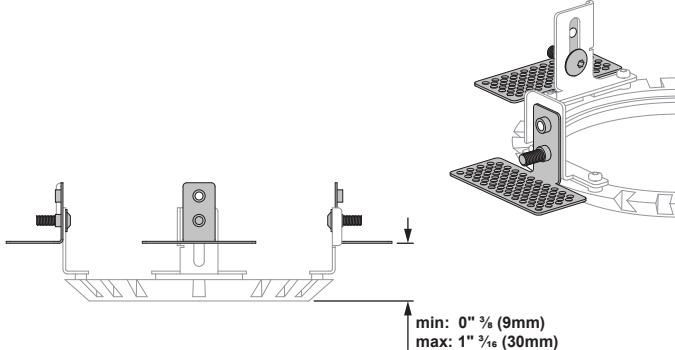




Recessed ring Ø5.7

US_14204030

BRACKET POSITIONS		INSTALLATION	
LOOSEN SCREWS TO ADJUST HEIGHT, OR REMOVE THE BRACKETS 		1 	2 
 min: 0" 1/16 (1mm) max: 0" 1/16 (17mm)		PROTECT THE INSIDE OF THE FRAME FROM FILLER WITH CARDBOARD TEMPLATE 	
 min: 0" 3/8 (9mm) max: 1" 3/16 (30mm)		 FIXATE BRACKETS WITH SCREWS & ADJUST HEIGHT  INNER EDGE MUST BE PERFECTLY CLEAN	