

## Placebo Track 48V Suspended


### Overview



Trying out a new, lovely pendant light on Pista is always exciting. This time, our 48V track welcomes Placebo Track 48V Suspended, and offers all kinds of choices of up and down light. Different shapes, sizes, shades and color combinations can be clicked into Pista, or moved again. And again.


### How to Specify (Example)

#### 1. Select suspension body → Page 2




Example: **PLACE-T48-SP-D-2.4-1X-27-DY-0101-DI-CHBA**  
(Placebo Track 48V Suspended Down 2.4 1x, 2700K, dry rated, 0-10V, driver included, champagne brushed anodised)

#### 2. Select Glass → Page 3



Example: **PLACEBO-GO-DO-6.1**  
(Placebo Glass Ball down, 6.1")

#### 3. Select Optional Shade → Page 4



Example: **PLACEBO-BEANIE-CH**  
(Placebo Beanie Champagne)


#### Example Order:

Qty.	Item
1	PLACE-T48-SP-D-2.4-1X-27-DY-0101-DI-CHBA
1	PLACEBO-GO-DO-6.1
1	PLACEBO-BEANIE-CH


## Placebo Track 48V Suspended

### Luminaire Specifications & Ordering Information

- For use with Pista 48V track systems
- Body Material: Aluminum
- Finish: Powder Coat or anodized
- Stem and track adapter is always black when an anodized finish is used (white available by special request)
- Cable Diameter: 0.18"
- Cable Color: Black
- Cable length can be shortened during installation
- Upon insertion, fixtures lock into track and are unlocked / removed with a flathead screwdriver
- **Must be combined with glass**



Placebo Track 48V Suspended Down 2.4

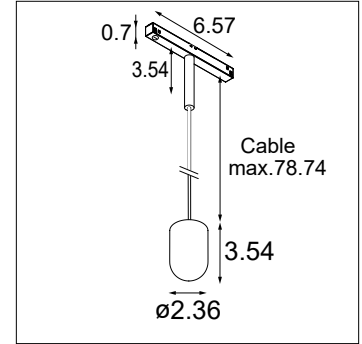

Placebo Track 48V Suspended Up 2.4

### Finish Information



### Pista Track Compatibility

	SURFACE / SUSPENDED TRACK	SUSPENDED UP / DOWN TRACK		RECESSED FLANGED TRACK	RECESSED TRIMLESS TRACK
		UP PORTION	DOWN PORTION		
Placebo	Ⓜ		Ⓜ	Ⓜ	Ⓜ

See separate track datasheets for track information and accessories


### Ordering Information

				DY		DI					
<b>PLACE-T48-SP-D-2.4-1X</b>	Placebo Track 48V Suspended Down 2.4 1x	<b>27</b>	2700K	<b>DY</b>	Dry Location	<b>0101</b>	0-10V	<b>DI</b>	Driver Included	<b>WHS</b>	White Structure
<b>PLACE-T48-SP-U-2.4-1X</b>	Placebo Track 48V Suspended Up 2.4 1x	<b>30</b>	3000K			<b>D</b>	DALI			<b>BLS</b>	Black Structure
		<b>35</b>	3500K							<b>BLBA</b>	Anodized Black
		<b>WD</b>	Warm Dim							<b>BRBA</b>	Anodized Bronze
										<b>CHBA</b>	Anodized Champagne
										<b>SBBA</b>	Anodized Silver Bronze


## Placebo Track 48V Suspended

### Glass Specifications


- Glass selection required for use with Placebo
- Glass components attach mechanically with a twist to lock onto Placebo luminaire
- Glass Material: 3-layer hand blown glass
- For “up” versions, cable is not visible through glass

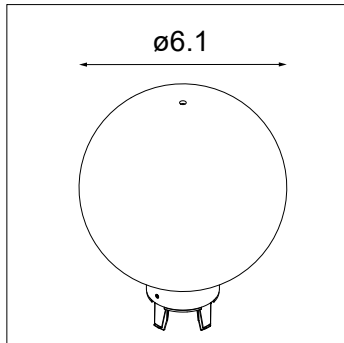


Placebo Glass Ball Up (GLB) Ø6.1"

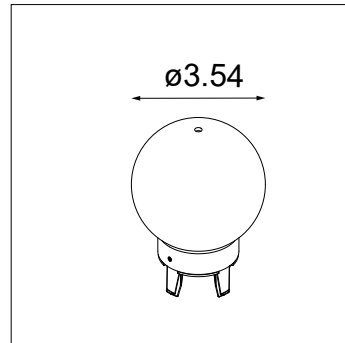


Placebo Glass Ball Up (GLB) Ø3.5"

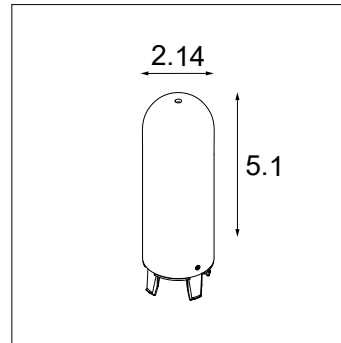


Placebo Glass Tube Up (GLT) 5.1"

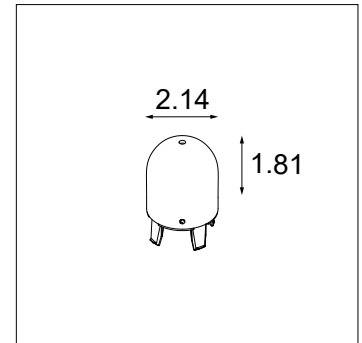


Placebo Glass Tube Up (GLT) 1.8"

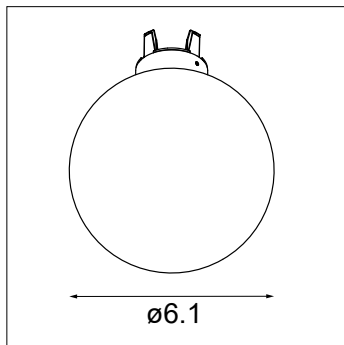


Placebo Glass Ball Down (GLB) Ø6.1"

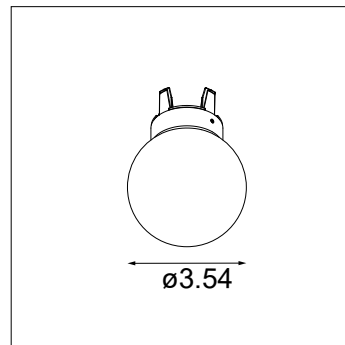

Placebo Glass Ball Down (GLB) Ø3.5"

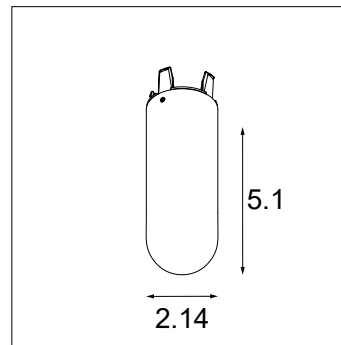

Placebo Glass Tube Down (GLT) 5.1"

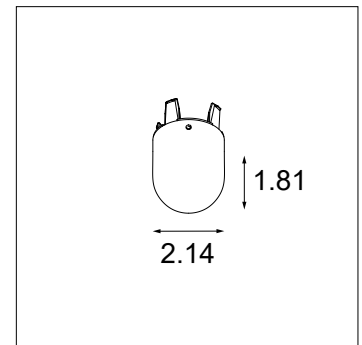

Placebo Glass Tube Down (GLT) 1.8"

### Glass Information & Ordering


SELECTION ↓	ORDERING CODE	WEIGHT	COMPATIBILITY	
			UP	DOWN
	PLACEBO-GLB-DO-3.5	0.39lbs	No	Yes
	PLACEBO-GLB-DO-6.1	1.07lbs	No	Yes
	PLACEBO-GLT-DO-1.8	0.14lbs	No	Yes
	PLACEBO-GLT-DO-5.1	0.37lbs	No	Yes
	PLACEBO-GLB-UP-3.5	0.39lbs	Yes	No
	PLACEBO-GLB-UP-6.1	1.07lbs	Yes	No
	PLACEBO-GLT-UP-1.8	0.14lbs	Yes	No
	PLACEBO-GLT-UP-5.1	0.37lbs	Yes	No

## Placebo Track 48V Suspended


### Shade Specifications

- Shades are optional (not required for use with Placebo)
- Shade material: Aluminum
- Exterior Finish: Paint or Paint with brushed metallic finish
- Interior Finish: Matte white (RAL 9002) Paint except with Sombrero which only has an exterior finish
- Sombrero only compatible with down Placebo version
- Weight: Douli – 1.1lbs  
Beanie - 1.98lbs  
Sombrero - 0.92lbs


### Finish Information

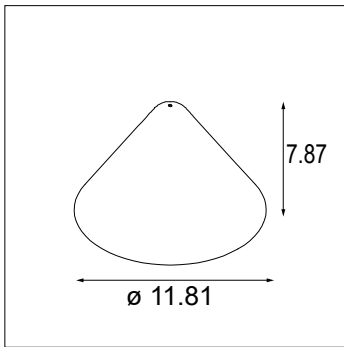

Placebo Douli

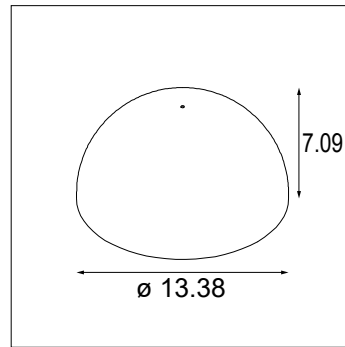

Placebo Beanie

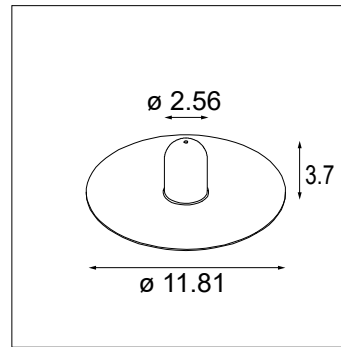

Placebo Sombrero

### Ordering Information

**PLACEBO**

**DOULIE**

**BEANIE**

**SOMBRERO**

**BLMT** Black Matte

**BR** Bronze


**CH** Champagne

**GWMT** Grey White Matte

## Placebo Track 48V Suspended

### Performance Specifications (per luminaire)

	Fixed CCT	Warm Dim		
Weight	1.23lbs			
Location	Dry			
CRI*	93, R9: 65	94, R9: 69		
Lifetime	L80 B20 @ 50,000 hrs			
UGR	see website			
Electrical (typical)				
	Dim Type	Input Voltage	Connected Load	Dimming Level***
Fixed CCT	0-10V	48VDC	7.1W	1%
Warm Dim	0-10V	48VDC	8.4W	1%
Fixed CCT	DALI**	48VDC	7.1W	1%
Warm Dim	DALI**	48VDC	8.4W	1%

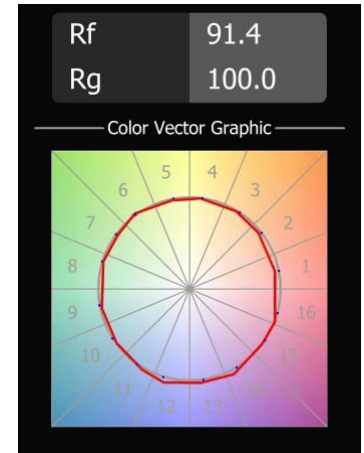

For photometric files see website or contact factory

\* CRI & TM-30 Value for 3000K

\*\* Compatible with Casambi Wireless Pista Module. See track datasheets for more details.

\*\*\* Consult the factory for dimmer compatibility

### Output Specifications

Performance is typical per head  
( ) indicates multipliers

Version	Reference Delivered Lumens	CCT	Optics
Down	626 (Ref: 3000K, Glass ball Ø6.1, no shade)	2700K (0.97) 3000K (1.0) 3500K (1.06)	Tube 1.8 (0.72) Tube 1.8 + Somb WHS (0.58) Tube 1.8 + Somb BLS (0.54) Tube 1.8 + Beanie (0.51) Tube 1.8 + Douli (0.50) Tube 5.1 (0.88) Tube 5.1 + Somb WHS (0.85) Tube 5.1 + Somb BLS (0.67) Tube 5.1 + Beanie (0.57) Tube 5.1 + Douli (0.62) Ball 3.5 (0.85) Ball 3.5 + Somb WHS (0.90) Ball 3.5 + Somb BLS (0.72) Ball 3.5 + Beanie (0.76) Ball 3.5 + Douli (0.72) Ball 6.1 (1.0) Ball 6.1 + Somb WHS (0.96) Ball 6.1 + Somb BLS (0.83) Ball 6.1 + Beanie (0.76) Ball 6.1 + Douli (0.75)
Up	626 (Ref: 3000K, Glass ball Ø6.1, no shade)	2700K (0.97) 3000K (1.0) 3500K (1.06)	Tube 1.8 (0.72) Tube 1.8 + Beanie (0.32) Tube 1.8 + Douli (0.16) Tube 5.1 (0.88) Tube 5.1 + Beanie (0.44) Tube 5.1 + Douli (0.39) Ball 3.5 (0.85) Ball 3.5 + Beanie (0.46) Ball 3.5 + Douli (0.31) Ball 6.1 (1.0) Ball 6.1 + Beanie (0.47) Ball 6.1 + Douli (0.42)

Example Calculation

To determine typical output for Down, 2700K, tube 5.1 + Beanie  
 $626 \times 0.97 \times 0.57 = 346$  lumen

### Listings and Certifications

- Dry location listed
- cUL & UL listed

### Warranty

Visit <https://www.supermodular.com/warranty>