

# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

## Minude Semi-Recessed Adjustable 45 1x

LED 3000K Medium DE White Structure

Modular Lighting Instruments





## GENERAL INFORMATION

### MANUFACTURER

Manufacturer	Modular Lighting Instruments
Address	Armoedestraat 71 - 8800 Roeselare - BELGIUM
Contact details	sustainability@supermodular.com
Website	www.supermodular.com

### EPD STANDARDS, SCOPE, AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Lighting
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options and end of life
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

### PRODUCT

Product name	Minude Semi-Recessed Adjustable 45 1x
Additional labels	LED 3000K Medium DE White Structure
Product reference	5413987285943
Place of production	CN, BE
Period for data	2023
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	Not applicable %

### ENVIRONMENTAL DATA SUMMARY

Declared unit	0.242 kg
Declared unit mass	6.41E+00
GWP-fossil, A1-A3 (kgCO <sub>2</sub> e)	6.24E+00
GWP-total, A1-A3 (kgCO <sub>2</sub> e)	21.5
Secondary material, inputs (%)	69.4
Secondary material, outputs (%)	22.6
Total energy use, A1-A3 (kWh)	4.69E-02
Total water use, A1-A3 (m <sup>3</sup> e)	0.242 kg



## PRODUCT AND MANUFACTURER

### ABOUT THE MANUFACTURER

Belgian architectural lighting since 1980 Creating beautifully crafted products that break the boundaries of technical limitations. Our ambition since the start. Over the years, we have built the reputation of being innovators and pioneers in the architectural lighting world. Today, staying true to our core values, we continue offering a full portfolio to challenge your thinking.

For more information, please visit:

[www.supermodular.com](http://www.supermodular.com)

### PRODUCT DESCRIPTION

Adding a touch of minimalistic elegance is easy when you have Minude Semi-Recessed. A small cylinder, a deep-recessed light source, a long list of anodised colours and impressive flexibility. On walls or ceilings, with nothing but a small, circular plate hiding the installation hole.

For more information, please visit:

[Minude Semi-Recessed Adjustable 45 1x LED 3000K Medium DE White Structure \(supermodular.com\)](#)

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	92.795	EU, China
Minerals	2.575	EU, China
Fossil materials	4.63	EU, China
Bio-based materials	0	Not applicable

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.05084625

### FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Unit
Mass per declared unit	0.242 kg
Functional unit	453 lumens over 50000 hours
Reference service life	50000

### SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).



# PRODUCT LIFE-CYCLE

## SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Modular’s manufacturing facilities are included in this stage.

The product is made of metals, plastics, and electronic components. All components are transported to Modular’s production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers.

## TRANSPORT AND INSTALLATION (A4-A5)

Transportation distance is defined according to the PCR. The average distance of transportation from suppliers in Europe to manufacturing sites in Europe and from suppliers in Asia to manufacturing sites in Asia was assumed to be 2000 km by lorry. In the case of intercontinental

transportation, a conservative average distance of 20000 km by a container ship (sea) was assumed. The same applies to distances from manufacturing sites to customers. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.


## PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from Europe’s electricity grid mix (B6). Impacts due to electricity production include direct emissions to air, transformation, and transmission losses. The non-functional parts that are replaced are disposed and sent to waste treatment in the same module. Air, soil, and water impacts during the use phase have not been studied.

## PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

# MANUFACTURING PROCESS

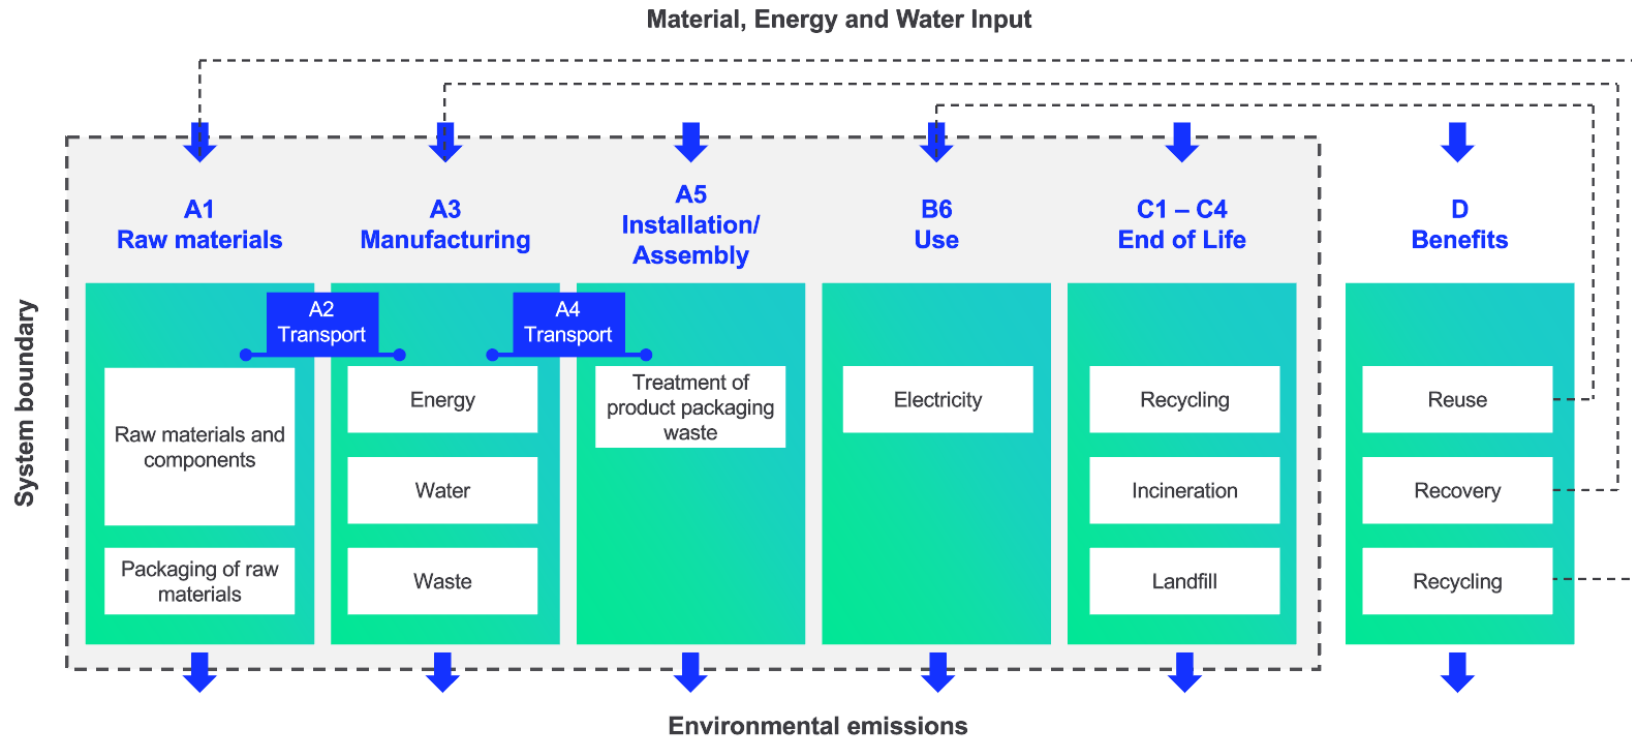



## LIFE-CYCLE ASSESSMENT

### CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

### ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

### AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

### LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent 3.8 database was used as the source of environmental data.

## ENVIRONMENTAL IMPACT DATA

### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	5.44E+00	6.98E-02	7.34E-01	6.24E+00	6.97E-02	1.88E-01	MNR	MNR	MNR	MNR	MNR	1.68E+02	MNR	0.00E+00	3.39E-03	1.45E-02	1.24E-02	-2.48E+00
GWP – fossil	kg CO <sub>2</sub> e	5.42E+00	6.98E-02	9.16E-01	6.41E+00	6.96E-02	3.38E-03	MNR	MNR	MNR	MNR	MNR	1.68E+02	MNR	0.00E+00	3.39E-03	1.45E-02	1.24E-02	-2.48E+00
GWP – biogenic	kg CO <sub>2</sub> e	4.52E-03	0.00E+00	-1.84E-01	-1.80E-01	2.69E-05	1.84E-01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-4.09E-04
GWP – LULUC	kg CO <sub>2</sub> e	8.03E-03	4.33E-05	2.37E-03	1.04E-02	2.57E-05	3.39E-06	MNR	MNR	MNR	MNR	MNR	3.93E-01	MNR	0.00E+00	1.25E-06	5.59E-06	2.69E-06	-2.51E-04
Ozone depletion pot.	kg CFC <sub>-11</sub> e	1.99E-07	1.45E-08	9.17E-08	3.06E-07	1.60E-08	3.71E-10	MNR	MNR	MNR	MNR	MNR	8.53E-06	MNR	0.00E+00	7.80E-10	4.70E-10	2.55E-10	-6.81E-08
Acidification potential	mol H <sup>+</sup> e	3.71E-02	1.67E-03	3.86E-03	4.26E-02	2.95E-04	2.35E-05	MNR	MNR	MNR	MNR	MNR	9.60E-01	MNR	0.00E+00	1.44E-05	4.99E-05	1.20E-05	-2.57E-02
EP-freshwater <sup>2)</sup>	kg Pe	2.20E-04	3.47E-07	3.02E-05	2.51E-04	5.70E-07	1.02E-07	MNR	MNR	MNR	MNR	MNR	1.78E-02	MNR	0.00E+00	2.78E-08	1.85E-07	4.48E-08	-1.58E-04
EP-marine	kg Ne	5.68E-03	4.15E-04	9.11E-04	7.00E-03	8.76E-05	9.77E-05	MNR	MNR	MNR	MNR	MNR	1.27E-01	MNR	0.00E+00	4.27E-06	1.12E-05	3.83E-06	-2.79E-03
EP-terrestrial	mol Ne	6.19E-02	4.61E-03	7.86E-03	7.44E-02	9.67E-04	5.66E-05	MNR	MNR	MNR	MNR	MNR	1.45E+00	MNR	0.00E+00	4.71E-05	1.28E-04	3.87E-05	-3.22E-02
POCP (“smog”) <sup>3)</sup>	kg NMVOCe	1.81E-02	1.21E-03	2.89E-03	2.22E-02	3.09E-04	4.24E-05	MNR	MNR	MNR	MNR	MNR	3.96E-01	MNR	0.00E+00	1.51E-05	3.47E-05	1.13E-05	-9.32E-03
ADP-minerals & metals <sup>4)</sup>	kg Sbe	1.50E-04	1.17E-07	2.67E-05	1.77E-04	1.63E-07	3.24E-08	MNR	MNR	MNR	MNR	MNR	1.57E-03	MNR	0.00E+00	7.95E-09	4.73E-07	4.99E-09	-3.83E-05
ADP-fossil resources	MJ	5.23E+01	9.28E-01	1.33E+01	6.65E+01	1.05E+00	4.09E-02	MNR	MNR	MNR	MNR	MNR	3.57E+03	MNR	0.00E+00	5.10E-02	5.21E-02	2.60E-02	-2.44E+01
Water use <sup>5)</sup>	m <sup>3</sup> e depr.	1.50E+00	3.23E-03	5.29E-01	2.03E+00	4.68E-03	5.65E-04	MNR	MNR	MNR	MNR	MNR	9.77E+01	MNR	0.00E+00	2.28E-04	1.26E-03	1.78E-03	-1.76E-01

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO<sub>4</sub>e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

### ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	4.34E-07	3.95E-09	4.37E-08	4.81E-07	8.02E-09	8.64E-10	MNR	MNR	MNR	MNR	MNR	3.15E-06	MNR	0.00E+00	3.91E-10	6.59E-10	2.28E-10	-1.36E-07
Ionizing radiation <sup>6)</sup>	kBq U235e	1.52E-01	4.32E-03	3.48E-02	1.91E-01	4.98E-03	2.54E-04	MNR	MNR	MNR	MNR	MNR	9.68E+01	MNR	0.00E+00	2.43E-04	3.14E-04	1.34E-04	-1.47E-01
Ecotoxicity (freshwater)	CTUe	2.12E+02	6.72E-01	2.47E+01	2.37E+02	9.41E-01	6.61E-01	MNR	MNR	MNR	MNR	MNR	2.43E+03	MNR	0.00E+00	4.58E-02	2.55E-01	1.66E+01	-5.44E+01
Human toxicity, cancer	CTUh	7.67E-09	3.62E-11	5.98E-10	8.31E-09	2.31E-11	8.36E-12	MNR	MNR	MNR	MNR	MNR	7.96E-08	MNR	0.00E+00	1.13E-12	7.87E-12	3.15E-11	-5.89E-10
Human tox. non-cancer	CTUh	1.77E-07	5.31E-10	2.07E-08	1.99E-07	9.31E-10	2.34E-10	MNR	MNR	MNR	MNR	MNR	2.62E-06	MNR	0.00E+00	4.54E-11	3.35E-10	1.61E-09	-6.09E-08
SQP <sup>7)</sup>	-	1.79E+01	4.51E-01	1.17E+01	3.01E+01	1.20E+00	5.10E-02	MNR	MNR	MNR	MNR	MNR	6.46E+02	MNR	0.00E+00	5.87E-02	9.95E-02	3.60E-02	-4.90E+00

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.



### USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ	4.27E+00	7.77E-03	1.12E+01	1.55E+01	1.18E-02	2.48E-03	MNR	MNR	MNR	MNR	MNR	7.28E+02	MNR	0.00E+00	5.74E-04	7.78E-03	1.19E-03	-4.28E-01
Renew. PER as material	MJ	0.00E+00	0.00E+00	1.67E+00	1.67E+00	0.00E+00	-1.67E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total use of renew. PER	MJ	4.27E+00	7.77E-03	1.29E+01	1.72E+01	1.18E-02	-1.66E+00	MNR	MNR	MNR	MNR	MNR	7.28E+02	MNR	0.00E+00	5.74E-04	7.78E-03	1.19E-03	-4.28E-01
Non-re. PER as energy	MJ	5.19E+01	9.28E-01	1.31E+01	6.60E+01	1.05E+00	4.09E-02	MNR	MNR	MNR	MNR	MNR	3.57E+03	MNR	0.00E+00	5.10E-02	5.21E-02	2.60E-02	-2.44E+01
Non-re. PER as material	MJ	2.55E-01	0.00E+00	8.11E-02	3.36E-01	0.00E+00	-8.11E-02	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	-1.27E-01	-1.28E-01	0.00E+00
Total use of non-re. PER	MJ	5.22E+01	9.28E-01	1.32E+01	6.63E+01	1.05E+00	-4.02E-02	MNR	MNR	MNR	MNR	MNR	3.57E+03	MNR	0.00E+00	5.10E-02	-7.47E-02	-1.02E-01	-2.44E+01
Secondary materials	kg	5.21E-02	3.67E-04	9.97E-02	1.52E-01	2.90E-04	4.75E-05	MNR	MNR	MNR	MNR	MNR	3.68E-01	MNR	0.00E+00	1.41E-05	5.49E-05	9.73E-05	9.84E-02
Renew. secondary fuels	MJ	1.44E-03	1.64E-06	6.89E-03	8.33E-03	2.93E-06	3.44E-07	MNR	MNR	MNR	MNR	MNR	2.98E-03	MNR	0.00E+00	1.43E-07	2.79E-06	5.28E-07	-5.18E-05
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m <sup>3</sup>	3.41E-02	8.01E-05	1.27E-02	4.69E-02	1.35E-04	2.63E-05	MNR	MNR	MNR	MNR	MNR	3.08E+00	MNR	0.00E+00	6.60E-06	3.97E-05	1.42E-05	-8.03E-03

8) PER = Primary energy resources.

### END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.06E+00	1.25E-03	4.73E-02	1.11E+00	1.39E-03	2.23E-04	MNR	MNR	MNR	MNR	MNR	1.28E+01	MNR	0.00E+00	6.76E-05	3.84E-04	9.70E-04	-4.12E-01
Non-hazardous waste	kg	8.29E+00	1.37E-02	9.54E-01	9.26E+00	2.28E-02	3.95E-02	MNR	MNR	MNR	MNR	MNR	8.12E+02	MNR	0.00E+00	1.11E-03	1.46E-02	7.19E-02	-7.29E+00
Radioactive waste	kg	8.55E-05	6.45E-06	1.54E-05	1.07E-04	7.00E-06	1.19E-07	MNR	MNR	MNR	MNR	MNR	2.60E-02	MNR	0.00E+00	3.41E-07	2.22E-07	0.00E+00	-5.41E-05

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	1.64E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	4.21E-02	4.21E-02	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	0.00E+00	0.00E+00	9.51E-02	0.00E+00	0.00E+00





### ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> e	5.25E+00	6.92E-02	9.11E-01	6.23E+00	6.89E-02	7.53E-02	MNR	MNR	MNR	MNR	MNR	1.66E+02	MNR	0.00E+00	3.36E-03	1.44E-02	1.23E-02	-2.43E+00
Ozone depletion Pot.	kg CFC-11e	1.74E-07	1.15E-08	7.89E-08	2.64E-07	1.27E-08	2.99E-10	MNR	MNR	MNR	MNR	MNR	7.39E-06	MNR	0.00E+00	6.18E-10	3.81E-10	2.05E-10	-5.78E-08
Acidification	kg SO <sub>2</sub> e	3.12E-02	1.33E-03	3.14E-03	3.57E-02	2.29E-04	1.90E-05	MNR	MNR	MNR	MNR	MNR	8.14E-01	MNR	0.00E+00	1.12E-05	4.01E-05	9.33E-06	-2.21E-02
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	9.22E-03	1.56E-04	1.31E-03	1.07E-02	5.22E-05	2.50E-04	MNR	MNR	MNR	MNR	MNR	6.26E-01	MNR	0.00E+00	2.54E-06	1.32E-05	1.94E-05	-6.24E-03
POCP (“smog”)	kg C <sub>2</sub> H <sub>4</sub> e	1.83E-03	3.52E-05	2.39E-04	2.11E-03	8.94E-06	1.69E-05	MNR	MNR	MNR	MNR	MNR	3.33E-02	MNR	0.00E+00	4.36E-07	1.50E-06	6.54E-07	-1.09E-03
ADP-elements	kg Sbe	1.49E-04	1.14E-07	2.66E-05	1.76E-04	1.58E-07	3.21E-08	MNR	MNR	MNR	MNR	MNR	1.56E-03	MNR	0.00E+00	7.70E-09	4.73E-07	4.61E-09	-3.80E-05
ADP-fossil	MJ	5.22E+01	9.28E-01	1.33E+01	6.64E+01	1.05E+00	4.09E-02	MNR	MNR	MNR	MNR	MNR	3.57E+03	MNR	0.00E+00	5.10E-02	5.21E-02	2.60E-02	-2.44E+01

## APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaires (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact ( $SI$ ), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

**Table A1 Light management functions (EPD Hub aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$4. \text{ Scaled Impact} = GWP_{case} * TSF$$



**Table A2 Scaled GWP per scaling factor (EPD Hub aligned)**

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
2700K Medium DE White Structure	444.0	5.7	77.9	1.0	1.0	0.75	0.75	0.55	168.0	126.0	126.0	92.4
2700K Medium DE Black Structure	429.0	5.7	75.3	1.0	1.0	0.75	0.75	0.55	168.0	126.0	126.0	92.4
3000K Medium DE White Structure	453.0	5.7	79.5	1.0	1.0	0.75	0.75	0.55	168.0	126.0	126.0	92.4
3000K Medium DE Black Structure	438.0	5.7	76.8	1.0	1.0	0.75	0.75	0.55	168.0	126.0	126.0	92.4
2700K Spot DE White Structure	206.0	4.1	50.2	0.719	0.719	0.539	0.539	0.395	120.8	90.6	90.6	66.4
2700K Spot DE Black Structure	193.0	4.1	47.1	0.719	0.719	0.539	0.539	0.395	120.8	90.6	90.6	66.4
3000K Spot DE Black Structure	204.0	4.1	49.8	0.719	0.719	0.539	0.539	0.395	120.8	90.6	90.6	66.4
3000K Spot DE White Structure	218.0	4.1	53.2	0.719	0.719	0.539	0.539	0.395	120.8	90.6	90.6	66.4

## APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output ( $O_{lum}$ ) and reference service life ( $RSL$ ) of each product within the same product family.

To calculate the Scaled Impact ( $SI_{pep}$ ), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output ( $O_{lum}$ ) and reference service lifetime ( $RSL$ ) of the product to estimate the final environmental impact. The scaled impact ( $SI_{pep}$ ) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ( $PGSF$ ), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

**Table A3: Light management functions (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1

Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

**Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)**

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
2700K Medium DE White Structure	444.0	5.7	77.9	1.577	1.577	1.183	1.183	0.867	264.9	198.7	198.7	145.7
2700K Medium DE Black Structure	429.0	5.7	75.3	1.632	1.632	1.224	1.224	0.898	274.2	205.6	205.6	150.9
3000K Medium DE White Structure	453.0	5.7	79.5	1.545	1.545	1.159	1.159	0.85	259.6	194.7	194.7	142.8
3000K Medium DE Black Structure	438.0	5.7	76.8	1.598	1.598	1.199	1.199	0.879	268.5	201.4	201.4	147.7
2700K Spot DE White Structure	206.0	4.1	50.2	2.443	2.443	1.832	1.832	1.344	410.4	307.8	307.8	225.8
2700K Spot DE Black Structure	193.0	4.1	47.1	2.608	2.608	1.956	1.956	1.434	438.1	328.6	328.6	240.9
3000K Spot DE Black Structure	204.0	4.1	49.8	2.467	2.467	1.85	1.85	1.357	414.5	310.8	310.8	228.0
3000K Spot DE White Structure	218.0	4.1	53.2	2.309	2.309	1.732	1.732	1.27	387.9	291.0	291.0	213.4