

# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

## Smart Lotis Recessed 115 1x

LED 3000K Medium DE White Structure

Modular Lighting Instruments



## GENERAL INFORMATION

### MANUFACTURER

Manufacturer	Modular Lighting Instruments
Address	Armoedestraat 71 - 8800 Roeselare - BELGIUM
Contact details	sustainability@supermodular.com
Website	www.supermodular.com

### EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

### PRODUCT

Product name	Smart Lotis Recessed 115 1x
Additional labels	LED 3000K Medium DE White Structure
Product reference	915005018401
Place of production	Belgium
Period for data	2023
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	%

### ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit of 1046 lumens over 50,000 hours
Declared unit mass	0.37 kg
GWP-fossil, A1-A3 (kgCO <sub>2</sub> e)	10.6
GWP-total, A1-A3 (kgCO <sub>2</sub> e)	10.5
Secondary material, inputs (%)	15.5
Secondary material, outputs (%)	68.4
Total energy use, A1-A3 (kWh)	37.6
Total water use, A1-A3 (m <sup>3</sup> e)	0.0831

## PRODUCT AND MANUFACTURER

### ABOUT THE MANUFACTURER

Belgian architectural lighting since 1980. Creating beautifully crafted products that break the boundaries of technical limitations. Our ambition since the start. Over the years, we have built the reputation of being innovators and pioneers in the architectural lighting world. Today, staying true to our core values, we continue offering a full portfolio to challenge your thinking.

For more information, please visit: [www.supermodular.com](http://www.supermodular.com).

### PRODUCT DESCRIPTION

Like the flower that opens up and welcomes you in, Smart Lotis Recessed brings charm to your space with a simple and elegant design. One of the three Smart designs, Smart Lotis Recessed is a popular spot for a minimalistic expression.

For more information, please visit:

[https://www.supermodular.com/en/products/smart-lotis-recessed--sf-48669/?pageSize10035\\_Lister=50](https://www.supermodular.com/en/products/smart-lotis-recessed--sf-48669/?pageSize10035_Lister=50)

Further information can be found at [www.supermodular.com](http://www.supermodular.com).

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	93.19	NAM, EU, APAC
Minerals	0	Not applicable
Fossil materials	6.8	NAM, EU, APAC
Bio-based materials	0	Not applicable

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.03

### FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 unit
Mass per declared unit	0.37 kg
Functional unit	1046 lumens over 50000 hours
Reference service life	50000 hours

### SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

# PRODUCT LIFE-CYCLE

## SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries			
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D			
X	X	X	X	X	MNR	MNR	MNR	MNR	MNR	X	MNR	MNR	X	X	X	X			
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Operational ol.	Deconstr./dem	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Modular’s manufacturing facilities are included in this stage.

The product is made of metals, plastics, and electronic components. All components are transported to Modular’s production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers.

Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Modular.

The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire. Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the

waste are due to ancillary materials used during manufacturing while the rest is due to material losses.

## TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

## PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from Europe’s electricity grid mix (B6).


The total power consumption of the reference product is calculated as follows:

Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.

## PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

# SYSTEM BOUNDARY

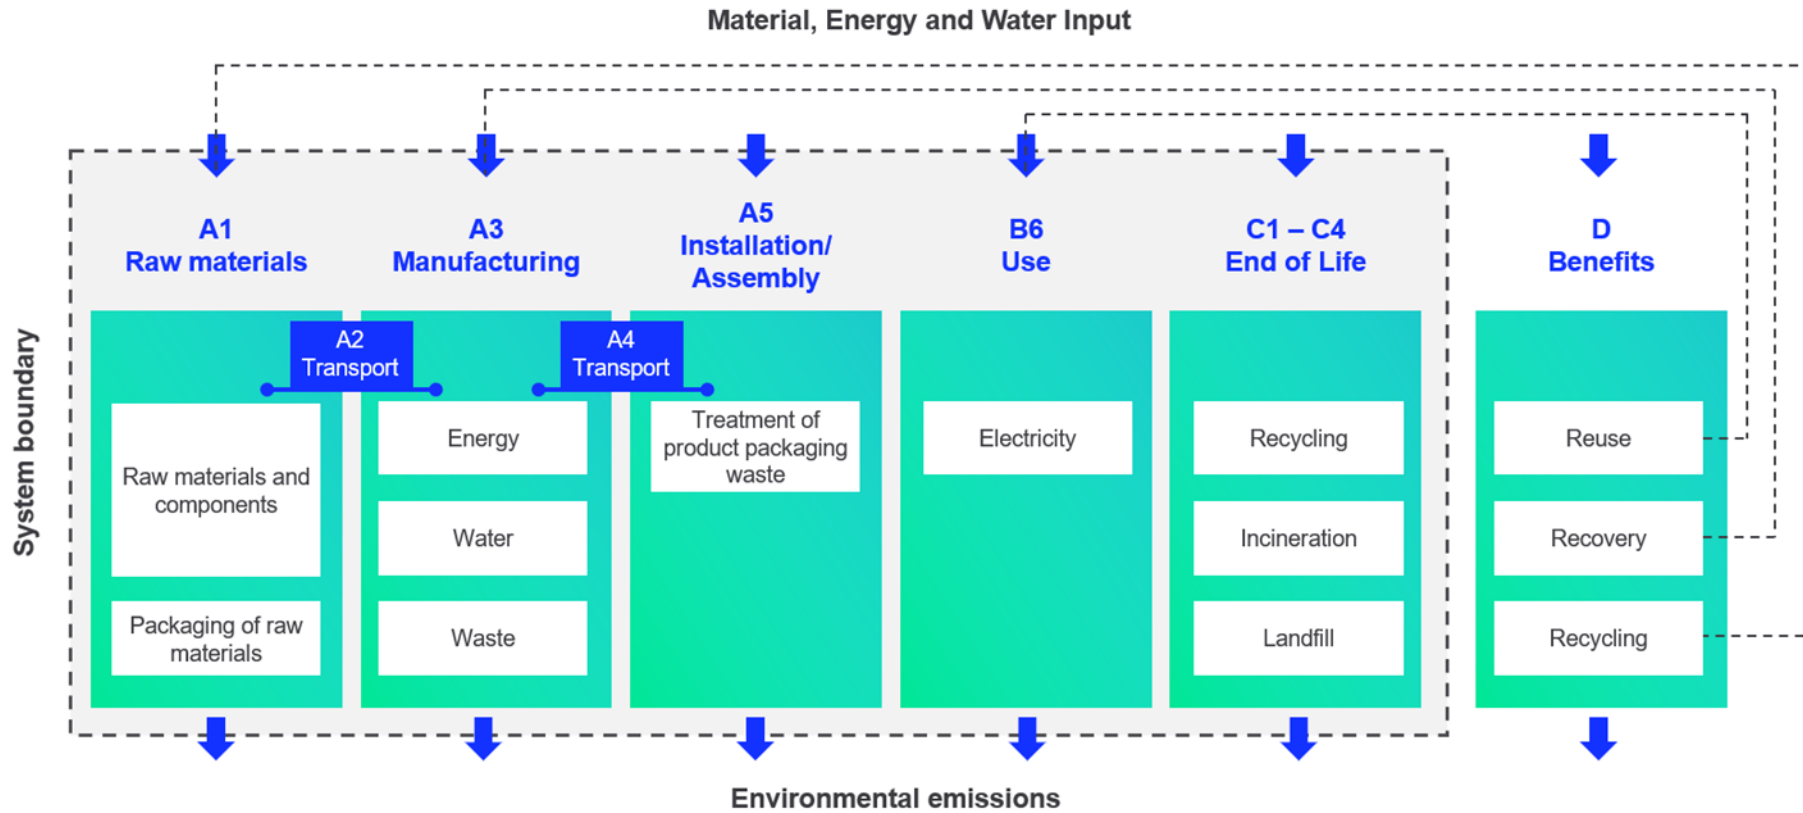

## LIFE-CYCLE ASSESSMENT

### CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

### ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

### AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

### LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent v3.8 and One Click LCA databases were used as sources of environmental data.

# ENVIRONMENTAL IMPACT DATA

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	9.28	0.0844	1.12	10.5	0.084	0.113	MNR	MNR	MNR	MNR	MNR	218.0	MNR	MNR	0.00526	0.0335	0.0207	-4.47
GWP – fossil	kg CO <sub>2</sub> e	9.32	0.0843	1.23	10.6	0.0839	0.0033	MNR	MNR	MNR	MNR	MNR	217.0	MNR	MNR	0.00526	0.0335	0.0207	-4.47
GWP – biogenic	kg CO <sub>2</sub> e	-0.0454	0.0	-0.109	-0.155	3.24e-05	0.109	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	-0.00663
GWP – LULUC	kg CO <sub>2</sub> e	0.00843	5.84e-05	0.00206	0.0106	3.09e-05	1.09e-06	MNR	MNR	MNR	MNR	MNR	0.508	MNR	MNR	1.94e-06	8.62e-06	4.56e-06	-0.000124
Ozone depletion pot.	kg CFC <sub>11</sub> e	3.54e-07	1.7e-08	1.26e-07	4.97e-07	1.93e-08	2.89e-10	MNR	MNR	MNR	MNR	MNR	1.1e-05	MNR	MNR	1.21e-09	7.35e-10	4.34e-10	-1.22e-07
Acidification potential	mol H <sup>+</sup> e	0.0783	0.00249	0.00494	0.0857	0.000355	2.41e-05	MNR	MNR	MNR	MNR	MNR	1.24	MNR	MNR	2.23e-05	7.85e-05	2.13e-05	-0.0484
EP-freshwater <sup>2)</sup>	kg Pe	0.000535	3.41e-07	3.52e-05	0.00057	6.87e-07	3.11e-08	MNR	MNR	MNR	MNR	MNR	0.023	MNR	MNR	4.31e-08	2.86e-07	7.93e-08	-0.000288
EP-marine	kg Ne	0.0104	0.000615	0.000996	0.012	0.000106	1.05e-05	MNR	MNR	MNR	MNR	MNR	0.165	MNR	MNR	6.62e-06	1.82e-05	7.12e-06	-0.00505
EP-terrestrial	mol Ne	0.112	0.00684	0.00941	0.128	0.00116	0.000108	MNR	MNR	MNR	MNR	MNR	1.87	MNR	MNR	7.3e-05	0.000206	6.9e-05	-0.0587
POCP (“smog”) <sup>3)</sup>	kg NMVOCe	0.0328	0.00178	0.00344	0.0381	0.000373	2.69e-05	MNR	MNR	MNR	MNR	MNR	0.513	MNR	MNR	2.34e-05	5.57e-05	2e-05	-0.017
ADP-minerals & metals <sup>4)</sup>	kg Sbe	0.000269	1.25e-07	3.98e-05	0.000309	1.97e-07	9.29e-09	MNR	MNR	MNR	MNR	MNR	0.00203	MNR	MNR	1.23e-08	7.18e-07	8.76e-09	-0.000127
ADP-fossil resources	MJ	95.2	1.08	18.0	114.0	1.26	0.0237	MNR	MNR	MNR	MNR	MNR	4630.0	MNR	MNR	0.079	0.0815	0.0448	-43.8
Water use <sup>5)</sup>	m <sup>3</sup> e depr.	2.92	0.0034	0.673	3.59	0.00564	0.00529	MNR	MNR	MNR	MNR	MNR	126.0	MNR	MNR	0.000353	0.00238	0.00294	-0.312

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

## ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	6.13e-07	3.35e-09	4.79e-08	6.64e-07	9.67e-09	2.19e-10	MNR	MNR	MNR	MNR	MNR	4.08e-06	MNR	MNR	6.06e-10	1.01e-09	3.84e-10	-2.46e-07
Ionizing radiation <sup>6)</sup>	kBq U235e	0.521	0.00499	0.0435	0.57	0.006	8.14e-05	MNR	MNR	MNR	MNR	MNR	125.0	MNR	MNR	0.000376	0.000483	0.000233	-0.264
Ecotoxicity	CTUe	307.0	0.718	30.5	338.0	1.13	0.139	MNR	MNR	MNR	MNR	MNR	3150.0	MNR	MNR	0.071	0.412	29.9	-108.0
Human toxicity, cancer	CTUh	1.4e-08	4.82e-11	7.81e-10	1.49e-08	2.78e-11	8.19e-12	MNR	MNR	MNR	MNR	MNR	1.03e-07	MNR	MNR	1.75e-12	1.3e-11	7.21e-11	-5.94e-10
Human tox. non-	CTUh	2.82e-07	5.01e-10	2.87e-08	3.11e-07	1.12e-09	3.31e-10	MNR	MNR	MNR	MNR	MNR	3.39e-06	MNR	MNR	7.03e-11	5.49e-10	4.46e-09	-1.55e-07
SQP <sup>7)</sup>	-	29.8	0.281	9.35	39.4	1.45	0.0139	MNR	MNR	MNR	MNR	MNR	836.0	MNR	MNR	0.091	0.151	0.0614	-9.4

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

### USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ	6.38	0.00799	15.5	21.9	0.0142	0.000697	MNR	MNR	MNR	MNR	MNR	942.0	MNR	MNR	0.00089	0.0119	0.00212	-0.694
Renew. PER as material	MJ	0.422	0.0	1.0	1.42	0.0	-1.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	0.0
Total use of renew. PER	MJ	6.8	0.00799	16.5	23.3	0.0142	-1.0	MNR	MNR	MNR	MNR	MNR	942.0	MNR	MNR	0.00089	0.0119	0.00212	-0.694
Non-re. PER as energy	MJ	94.5	1.08	17.8	113.0	1.26	0.0237	MNR	MNR	MNR	MNR	MNR	4620.0	MNR	MNR	0.079	0.0815	0.0448	-43.8
Non-re. PER as material	MJ	0.788	0.0	0.0186	0.807	0.0	-0.0186	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	-0.312	-0.312	0.0
Total use of non-re. PER	MJ	95.3	1.08	17.9	114.0	1.26	0.00514	MNR	MNR	MNR	MNR	MNR	4620.0	MNR	MNR	0.079	-0.23	-0.267	-43.8
Secondary materials	kg	0.0572	0.00047	0.0583	0.116	0.00035	2.72e-05	MNR	MNR	MNR	MNR	MNR	0.476	MNR	MNR	2.19e-05	8.5e-05	0.000153	0.185
Renew. secondary fuels	MJ	0.00278	1.53e-06	0.00379	0.00657	3.53e-06	3.72e-07	MNR	MNR	MNR	MNR	MNR	0.00386	MNR	MNR	2.21e-07	4.32e-06	9.23e-07	-8.98e-05
Non-ren. secondary fuels	MJ	0.0	0.0	0.0	0.0	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	0.0
Use of net fresh water	m <sup>3</sup>	0.0669	7.74e-05	0.0161	0.0831	0.000163	6.7e-05	MNR	MNR	MNR	MNR	MNR	3.98	MNR	MNR	1.02e-05	7.73e-05	3.26e-05	-0.0147

8) PER = Primary energy resources.

### END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.7	0.00147	0.0613	1.76	0.00167	0.00102	MNR	MNR	MNR	MNR	MNR	16.6	MNR	MNR	0.000105	0.000586	0.00273	-0.711
Non-hazardous waste	kg	21.3	0.0134	1.2	22.6	0.0274	0.0509	MNR	MNR	MNR	MNR	MNR	1050.0	MNR	MNR	0.00172	0.0263	0.115	-14.0
Radioactive waste	kg	0.000219	7.59e-06	1.85e-05	0.000245	8.43e-06	5.41e-08	MNR	MNR	MNR	MNR	MNR	0.0337	MNR	MNR	5.28e-07	3.35e-07	0.0	-9.68e-05

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.0	0.0	0.0	0.0	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	0.0
Materials for recycling	kg	0.0	0.0	0.0	0.0	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.242	0.0	0.0
Materials for energy rec	kg	0.0	0.0	0.0	0.0	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.0	0.0	0.0
Exported energy	MJ	0.0	0.0	0.0644	0.0644	0.0	0.0	MNR	MNR	MNR	MNR	MNR	0.0	MNR	MNR	0.0	0.251	0.0	0.0



**ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming P <sub>nt</sub>	kg CO <sub>2</sub> e	9.11	0.0837	1.21	10.4	0.083	0.00315	MNR	MNR	MNR	MNR	MNR	215.0	MNR	MNR	0.00521	0.0334	0.0205	-4.38
Ozone depletion P <sub>nt</sub>	kg CFC <sub>-11</sub> e	3.07e-07	1.35e-08	1.08e-07	4.29e-07	1.53e-08	2.5e-10	MNR	MNR	MNR	MNR	MNR	9.57e-06	MNR	MNR	9.58e-10	5.98e-10	3.51e-10	-1.03e-07
Acidification	kg SO <sub>2</sub> e	0.0668	0.00199	0.00408	0.0729	0.000276	1.74e-05	MNR	MNR	MNR	MNR	MNR	1.05	MNR	MNR	1.73e-05	6.27e-05	1.65e-05	-0.0418
Eutrophication	kg PO <sub>4</sub> <sup>3-</sup> e	0.0205	0.000225	0.00154	0.0222	6.29e-05	1.33e-05	MNR	MNR	MNR	MNR	MNR	0.81	MNR	MNR	3.94e-06	2.15e-05	4.85e-05	-0.0114
POCP (“smog”)	kg C <sub>2</sub> H <sub>4</sub> e	0.00352	5.16e-05	0.000287	0.00386	1.08e-05	5.15e-07	MNR	MNR	MNR	MNR	MNR	0.0431	MNR	MNR	6.75e-07	2.32e-06	1.17e-06	-0.00203
ADP-elements	kg Sbe	0.000267	1.22e-07	3.97e-05	0.000307	1.9e-07	7.34e-09	MNR	MNR	MNR	MNR	MNR	0.00202	MNR	MNR	1.19e-08	7.17e-07	8.04e-09	-0.000136
ADP-fossil	MJ	95.2	1.08	18.0	114.0	1.26	0.0237	MNR	MNR	MNR	MNR	MNR	4620.0	MNR	MNR	0.079	0.0815	0.0448	-43.8

## APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Modular directly for more information.

$$TSF = PSF * CSF$$

**Table A1 Light management functions (EPD Hub aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

4.  $Scaled\ Impact = GWP_{case} * TSF$

**Table A2 Scaled GWP per scaling factor (EPD Hub aligned)**

Module color	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
Smart Lotis Recessed 115 1x LED 2700K Wide Flood DE White Structure	912	11	83	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Wide Flood DE Black Structure	867	11	79	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Wide Flood DE Gold Matt	879	11	80	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Wide Flood DE White Structure	1036	11	94	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Wide Flood DE Black Structure	985	11	90	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Wide Flood DE Gold Matt	999	11	91	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Wide Flood DE White Structure	1098	11	100	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Wide Flood DE Black Structure	1044	11	95	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Wide Flood DE Gold Matt	1059	11	96	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Medium DE White Structure	1065	11	97	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Medium DE Gold Matt	1065	11	97	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Medium DE Black Structure	1048	11	95	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Medium DE Black Structure	1199	11	109	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Medium DE White Structure	1219	11	111	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Spot DE White Structure	1065	11	97	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Medium DE Gold Matt	1219	11	111	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Spot DE Gold Matt	1065	11	97	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Spot DE Black Structure	1038	11	94	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Flood DE Black Structure	1056	11	96	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Flood DE White Structure	1065	11	97	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Spot DE White Structure	1046	11	95	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 2700K Flood DE Gold Matt	1073	11	98	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Spot DE Gold Matt	1046	11	95	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Spot DE Black Structure	1020	11	93	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Medium DE Black Structure	1029	11	94	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Medium DE White Structure	1046	11	95	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9

Smart Lotis Recessed 115 1x LED 3000K Flood DE White Structure	1046	11	95	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Medium DE Gold Matt	1046	11	95	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Flood DE Gold Matt	1054	11	96	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 3000K Flood DE Black Structure	1037	11	94	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Spot DE Black Structure	1188	11	108	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Spot DE White Structure	1219	11	111	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Flood DE White Structure	1219	11	111	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Spot DE Gold Matt	1219	11	111	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Flood DE Gold Matt	1228	11	112	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9
Smart Lotis Recessed 115 1x LED 4000K Flood DE Black Structure	1209	11	110	1.00	1.00	0.75	0.75	0.55	218.0	163.5	163.5	119.9

## APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output ( $O_{lum}$ ) and reference service life ( $RSL$ ) of each product within the same product family.

To calculate the Scaled Impact ( $SI_{pep}$ ), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PSF * CSF$$

**Table A3: Light management functions (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

4. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminaire (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output ( $O_{lum}$ ) and reference service lifetime ( $RSL$ ) of the product to estimate the final environmental impact. The scaled impact ( $SI_{pep}$ ) is presented in Table A4.

$$SI_{PEP} = Scaled\ GWP * \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Modular directly for more information.

**Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)**

Module color	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
Smart Lotis Recessed 115 1x LED 2700K Wide Flood DE White Structure	912	11	83	1.00	1.00	0.75	0.75	0.55	167.3	125.5	125.5	92.0
Smart Lotis Recessed 115 1x LED 2700K Wide Flood DE Black Structure	867	11	79	1.00	1.00	0.75	0.75	0.55	176.0	132.0	132.0	96.8
Smart Lotis Recessed 115 1x LED 2700K Wide Flood DE Gold Matt	879	11	80	1.00	1.00	0.75	0.75	0.55	173.6	130.2	130.2	95.5
Smart Lotis Recessed 115 1x LED 3000K Wide Flood DE White Structure	1036	11	94	1.00	1.00	0.75	0.75	0.55	147.3	110.5	110.5	81.0
Smart Lotis Recessed 115 1x LED 3000K Wide Flood DE Black Structure	985	11	90	1.00	1.00	0.75	0.75	0.55	154.9	116.2	116.2	85.2
Smart Lotis Recessed 115 1x LED 3000K Wide Flood DE Gold Matt	999	11	91	1.00	1.00	0.75	0.75	0.55	152.8	114.6	114.6	84.0
Smart Lotis Recessed 115 1x LED 4000K Wide Flood DE White Structure	1098	11	100	1.00	1.00	0.75	0.75	0.55	139.0	104.2	104.2	76.4
Smart Lotis Recessed 115 1x LED 4000K Wide Flood DE Black Structure	1044	11	95	1.00	1.00	0.75	0.75	0.55	146.2	109.6	109.6	80.4
Smart Lotis Recessed 115 1x LED 4000K Wide Flood DE Gold Matt	1059	11	96	1.00	1.00	0.75	0.75	0.55	144.1	108.1	108.1	79.3
Smart Lotis Recessed 115 1x LED 2700K Medium DE White Structure	1065	11	97	1.00	1.00	0.75	0.75	0.55	143.3	107.5	107.5	78.8
Smart Lotis Recessed 115 1x LED 2700K Medium DE Gold Matt	1065	11	97	1.00	1.00	0.75	0.75	0.55	143.3	107.5	107.5	78.8
Smart Lotis Recessed 115 1x LED 2700K Medium DE Black Structure	1048	11	95	1.00	1.00	0.75	0.75	0.55	145.6	109.2	109.2	80.1
Smart Lotis Recessed 115 1x LED 4000K Medium DE Black Structure	1199	11	109	1.00	1.00	0.75	0.75	0.55	127.3	95.5	95.5	70.0
Smart Lotis Recessed 115 1x LED 4000K Medium DE White Structure	1219	11	111	1.00	1.00	0.75	0.75	0.55	125.2	93.9	93.9	68.9
Smart Lotis Recessed 115 1x LED 2700K Spot DE White Structure	1065	11	97	1.00	1.00	0.75	0.75	0.55	143.3	107.5	107.5	78.8
Smart Lotis Recessed 115 1x LED 4000K Medium DE Gold Matt	1219	11	111	1.00	1.00	0.75	0.75	0.55	125.2	93.9	93.9	68.9
Smart Lotis Recessed 115 1x LED 2700K Spot DE Gold Matt	1065	11	97	1.00	1.00	0.75	0.75	0.55	143.3	107.5	107.5	78.8
Smart Lotis Recessed 115 1x LED 2700K Spot DE Black Structure	1038	11	94	1.00	1.00	0.75	0.75	0.55	147.0	110.3	110.3	80.9
Smart Lotis Recessed 115 1x LED 2700K Flood DE Black Structure	1056	11	96	1.00	1.00	0.75	0.75	0.55	144.5	108.4	108.4	79.5
Smart Lotis Recessed 115 1x LED 2700K Flood DE White Structure	1065	11	97	1.00	1.00	0.75	0.75	0.55	143.3	107.5	107.5	78.8
Smart Lotis Recessed 115 1x LED 3000K Spot DE White Structure	1046	11	95	1.00	1.00	0.75	0.75	0.55	145.9	109.4	109.4	80.2

Smart Lotis Recessed 115 1x LED 2700K Flood DE Gold Matt	1073	11	98	1.00	1.00	0.75	0.75	0.55	142.2	106.7	106.7	78.2
Smart Lotis Recessed 115 1x LED 3000K Spot DE Gold Matt	1046	11	95	1.00	1.00	0.75	0.75	0.55	145.9	109.4	109.4	80.2
Smart Lotis Recessed 115 1x LED 3000K Spot DE Black Structure	1020	11	93	1.00	1.00	0.75	0.75	0.55	149.6	112.2	112.2	82.3
Smart Lotis Recessed 115 1x LED 3000K Medium DE Black Structure	1029	11	94	1.00	1.00	0.75	0.75	0.55	148.3	111.2	111.2	81.6
Smart Lotis Recessed 115 1x LED 3000K Medium DE White Structure	1046	11	95	1.00	1.00	0.75	0.75	0.55	145.9	109.4	109.4	80.2
Smart Lotis Recessed 115 1x LED 3000K Flood DE White Structure	1046	11	95	1.00	1.00	0.75	0.75	0.55	145.9	109.4	109.4	80.2
Smart Lotis Recessed 115 1x LED 3000K Medium DE Gold Matt	1046	11	95	1.00	1.00	0.75	0.75	0.55	145.9	109.4	109.4	80.2
Smart Lotis Recessed 115 1x LED 3000K Flood DE Gold Matt	1054	11	96	1.00	1.00	0.75	0.75	0.55	144.8	108.6	108.6	79.6
Smart Lotis Recessed 115 1x LED 3000K Flood DE Black Structure	1037	11	94	1.00	1.00	0.75	0.75	0.55	147.2	110.4	110.4	80.9
Smart Lotis Recessed 115 1x LED 4000K Spot DE Black Structure	1188	11	108	1.00	1.00	0.75	0.75	0.55	128.5	96.3	96.3	70.6
Smart Lotis Recessed 115 1x LED 4000K Spot DE White Structure	1219	11	111	1.00	1.00	0.75	0.75	0.55	125.2	93.9	93.9	68.9
Smart Lotis Recessed 115 1x LED 4000K Flood DE White Structure	1219	11	111	1.00	1.00	0.75	0.75	0.55	125.2	93.9	93.9	68.9
Smart Lotis Recessed 115 1x LED 4000K Spot DE Gold Matt	1219	11	111	1.00	1.00	0.75	0.75	0.55	125.2	93.9	93.9	68.9
Smart Lotis Recessed 115 1x LED 4000K Flood DE Gold Matt	1228	11	112	1.00	1.00	0.75	0.75	0.55	124.3	93.2	93.2	68.3
Smart Lotis Recessed 115 1x LED 4000K Flood DE Black Structure	1209	11	110	1.00	1.00	0.75	0.75	0.55	126.2	94.7	94.7	69.4