


ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Smart Recessed 48 HO IP55

Modular Lighting Instruments

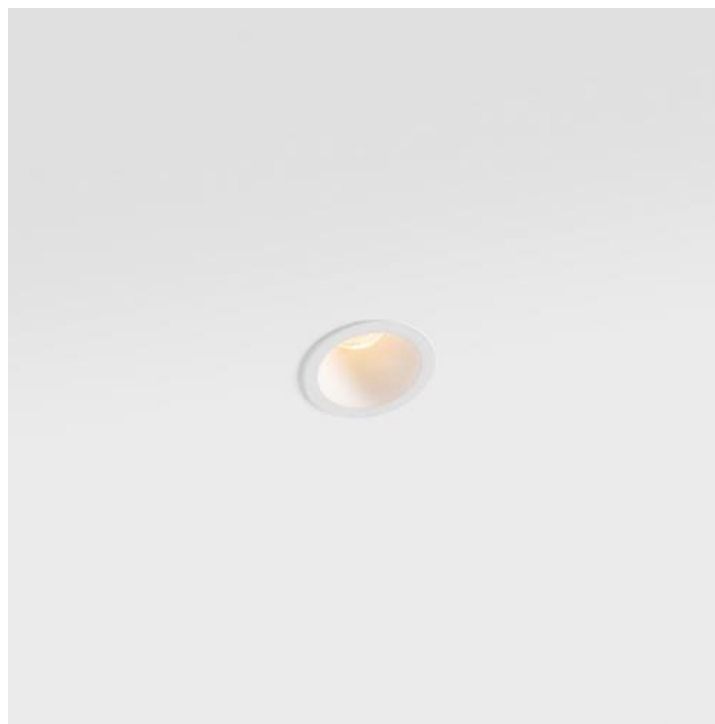

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Modular Lighting Instruments
Address	Armoedestraat 71 - 8800 Roeselare - BELGIUM
Contact details	sustainability@supermodular.com
Website	www.supermodular.com

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

PRODUCT

Product name	Smart Recessed 48 HO IP55
Additional labels	Not applicable
Product reference	915005668401 (12862009)
Place of production	BELGIUM
Period for data	2024
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	Not applicable

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 Unit
Declared unit mass	0.089 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	2.44E+00
GWP-total, A1-A3 (kgCO ₂ e)	2.37E+00
Secondary material, inputs (%)	12.1
Secondary material, outputs (%)	67
Total energy use, A1-A3 (kWh)	9.19
Net fresh water use, A1-A3 (m ³ e)	0.02

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Belgian architectural lighting since 1980. Creating beautifully crafted products that break the boundaries of technical limitations. Our ambition since the start. Over the years, we have built the reputation of being innovators and pioneers in the architectural lighting world. Today, staying true to our core values, we continue offering a full portfolio to challenge your thinking.

For more information, please visit: www.supermodular.com.

PRODUCT DESCRIPTION

Like the flower that opens up and welcomes you in, Smart Recessed brings charm to your space with a simple and elegant design. Smart Recessed is a popular spot for a minimalistic expression.

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	87.72	APAC , NAM , EU
Minerals	3.93	APAC
Fossil materials	8.35	APAC , NAM
Bio-based materials	0	Not applicable

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.014

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Unit
Mass per declared unit	0.089 kg
Functional unit	224 Lumens over 50000 hours
Reference service life	50000 hours

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0.1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Modular’s manufacturing facilities are included in this stage. The product is made of metals, plastics, and electronic components. All components are transported to Modular’s production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Modular. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire. Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the waste are due to ancillary materials used during manufacturing while the rest is due to material losses.

TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from EU’s electricity grid mix (B6). The total power consumption of the reference product is calculated as follows: Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

SYSTEM BOUNDARY



LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. EcoInvent 3.8 database was used as the source of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	2.12E+00	2.37E-02	2.26E-01	2.37E+00	2.33E-02	5.22E-02	MNR	MNR	MNR	MNR	MNR	5.94E+01	MNR	MNR	1.25E-03	8.68E-03	2.30E-02	-9.87E-01
GWP – fossil	kg CO ₂ e	2.14E+00	2.37E-02	2.76E-01	2.44E+00	2.33E-02	1.61E-03	MNR	MNR	MNR	MNR	MNR	5.93E+01	MNR	MNR	1.25E-03	8.68E-03	7.11E-03	-9.86E-01
GWP – biogenic	kg CO ₂ e	-1.59E-02	0.00E+00	-5.06E-02	-6.65E-02	9.00E-06	5.06E-02	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	1.59E-02	-1.28E-04
GWP – LULUC	kg CO ₂ e	2.91E-03	1.53E-05	9.16E-04	3.85E-03	8.59E-06	5.37E-07	MNR	MNR	MNR	MNR	MNR	1.39E-01	MNR	MNR	4.60E-07	2.01E-06	1.08E-06	-8.62E-05
Ozone depletion pot.	kg CFC ₁₁ e	8.34E-08	4.88E-09	3.09E-08	1.19E-07	5.35E-09	1.34E-10	MNR	MNR	MNR	MNR	MNR	3.01E-06	MNR	MNR	2.87E-10	1.70E-10	1.06E-10	-2.69E-08
Acidification potential	mol H ⁺ e	1.56E-02	6.13E-04	9.57E-04	1.72E-02	9.85E-05	1.16E-05	MNR	MNR	MNR	MNR	MNR	3.39E-01	MNR	MNR	5.28E-06	1.81E-05	5.21E-06	-1.06E-02
EP-freshwater ²⁾	kg Pe	1.02E-04	1.10E-07	6.91E-06	1.09E-04	1.91E-07	1.47E-08	MNR	MNR	MNR	MNR	MNR	6.28E-03	MNR	MNR	1.02E-08	6.60E-08	1.89E-08	-6.36E-05
EP-marine	kg Ne	2.34E-03	1.52E-04	2.64E-04	2.76E-03	2.93E-05	5.13E-06	MNR	MNR	MNR	MNR	MNR	4.49E-02	MNR	MNR	1.57E-06	4.26E-06	1.81E-06	-1.12E-03
EP-terrestrial	mol Ne	2.51E-02	1.69E-03	2.25E-03	2.90E-02	3.23E-04	5.27E-05	MNR	MNR	MNR	MNR	MNR	5.11E-01	MNR	MNR	1.73E-05	4.81E-05	1.75E-05	-1.30E-02
POCP (“smog”) ³⁾	kg NMVOCe	7.30E-03	4.42E-04	1.15E-03	8.89E-03	1.03E-04	1.31E-05	MNR	MNR	MNR	MNR	MNR	1.40E-01	MNR	MNR	5.54E-06	1.29E-05	5.02E-06	-3.75E-03
ADP-minerals & metals ⁴⁾	kg Sbe	8.02E-05	3.81E-08	1.76E-06	8.20E-05	5.46E-08	4.25E-09	MNR	MNR	MNR	MNR	MNR	5.53E-04	MNR	MNR	2.93E-09	1.62E-07	2.16E-09	-2.99E-05
ADP-fossil resources	MJ	2.13E+01	3.11E-01	4.46E+00	2.60E+01	3.50E-01	1.14E-02	MNR	MNR	MNR	MNR	MNR	1.26E+03	MNR	MNR	1.87E-02	1.90E-02	1.07E-02	-9.66E+00
Water use ⁵⁾	m ³ e depr.	5.74E-01	1.05E-03	1.04E-01	6.79E-01	1.56E-03	2.45E-03	MNR	MNR	MNR	MNR	MNR	3.45E+01	MNR	MNR	8.39E-05	5.87E-04	7.51E-04	-6.78E-02

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1.59E-07	1.20E-09	1.37E-08	1.74E-07	2.68E-09	1.05E-10	MNR	MNR	MNR	MNR	MNR	1.11E-06	MNR	MNR	1.44E-10	2.32E-10	9.21E-11	-5.42E-08
Ionizing radiation ⁶⁾	kBq U235e	8.73E-02	1.44E-03	9.75E-03	9.85E-02	1.66E-03	3.78E-05	MNR	MNR	MNR	MNR	MNR	3.42E+01	MNR	MNR	8.93E-05	1.13E-04	5.47E-05	-5.79E-02
Ecotoxicity (freshwater)	CTUe	7.88E+01	2.19E-01	5.40E+00	8.44E+01	3.14E-01	6.00E-02	MNR	MNR	MNR	MNR	MNR	8.58E+02	MNR	MNR	1.69E-02	9.83E-02	6.64E+00	-2.35E+01
Human toxicity, cancer	CTUh	3.09E-09	1.27E-11	2.13E-10	3.31E-09	7.72E-12	4.15E-12	MNR	MNR	MNR	MNR	MNR	2.81E-08	MNR	MNR	4.14E-13	3.06E-12	1.82E-11	-1.01E-10
Human tox. non-cancer	CTUh	6.39E-08	1.67E-10	3.08E-09	6.71E-08	3.11E-10	1.65E-10	MNR	MNR	MNR	MNR	MNR	9.24E-07	MNR	MNR	1.67E-11	1.28E-10	9.77E-10	-3.26E-08
SQP ⁷⁾	-	7.72E+00	1.27E-01	5.11E+00	1.30E+01	4.03E-01	6.93E-03	MNR	MNR	MNR	MNR	MNR	2.28E+02	MNR	MNR	2.16E-02	3.44E-02	1.48E-02	-2.04E+00

6) EN 15804+A2 disclaimer for ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	1.81E+00	2.50E-03	5.78E+00	7.59E+00	3.94E-03	3.11E-04	MNR	MNR	MNR	MNR	MNR	2.57E+02	MNR	MNR	2.11E-04	2.73E-03	4.89E-04	-1.43E-01
Renew. PER as material	MJ	1.54E-01	0.00E+00	4.75E-01	6.30E-01	0.00E+00	-4.75E-01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-2.46E-03	-1.52E-01	0.00E+00
Total use of renew. PER	MJ	1.96E+00	2.50E-03	6.25E+00	8.22E+00	3.94E-03	-4.75E-01	MNR	MNR	MNR	MNR	MNR	2.57E+02	MNR	MNR	2.11E-04	2.73E-04	-1.52E-01	-1.43E-01
Non-re. PER as energy	MJ	2.11E+01	3.11E-01	4.06E+00	2.55E+01	3.50E-01	1.14E-02	MNR	MNR	MNR	MNR	MNR	1.26E+03	MNR	MNR	1.87E-02	1.90E-02	1.07E-02	-9.66E+00
Non-re. PER as material	MJ	2.14E-01	0.00E+00	1.08E-02	2.25E-01	0.00E+00	-1.08E-02	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-1.05E-01	-1.09E-01	0.00E+00
Total use of non-re. PER	MJ	2.13E+01	3.11E-01	4.07E+00	2.57E+01	3.50E-01	5.57E-04	MNR	MNR	MNR	MNR	MNR	1.26E+03	MNR	MNR	1.87E-02	-8.57E-02	-9.84E-02	-9.66E+00
Secondary materials	kg	1.07E-02	1.27E-04	1.82E-02	2.91E-02	9.71E-05	1.28E-05	MNR	MNR	MNR	MNR	MNR	1.30E-01	MNR	MNR	5.20E-06	1.94E-05	3.56E-05	4.14E-02
Renew. secondary fuels	MJ	8.24E-04	5.12E-07	1.15E-03	1.98E-03	9.79E-07	1.52E-07	MNR	MNR	MNR	MNR	MNR	1.05E-03	MNR	MNR	5.25E-08	9.91E-07	2.20E-07	-2.54E-05
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	1.33E-02	2.53E-05	5.31E-03	1.86E-02	4.53E-05	2.34E-05	MNR	MNR	MNR	MNR	MNR	1.09E+00	MNR	MNR	2.43E-06	1.93E-05	8.40E-06	-3.23E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	3.99E-01	4.21E-04	1.30E-02	4.13E-01	4.64E-04	7.60E-04	MNR	MNR	MNR	MNR	MNR	4.53E+00	MNR	MNR	2.49E-05	1.34E-04	6.32E-04	-1.57E-01
Non-hazardous waste	kg	3.81E+00	4.35E-03	2.11E-01	4.03E+00	7.61E-03	1.67E-02	MNR	MNR	MNR	MNR	MNR	2.87E+02	MNR	MNR	4.08E-04	6.70E-03	2.84E-02	-3.06E+00
Radioactive waste	kg	4.26E-05	2.17E-06	6.88E-06	5.17E-05	2.34E-06	3.03E-08	MNR	MNR	MNR	MNR	MNR	9.18E-03	MNR	MNR	1.25E-07	7.69E-08	0.00E+00	-2.13E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	5.66E-02	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	3.03E-03	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	1.54E-02	1.54E-02	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	6.66E-02	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	2.08E+00	2.35E-02	2.75E-01	2.38E+00	2.30E-02	1.53E-03	MNR	MNR	MNR	MNR	MNR	5.87E+01	MNR	MNR	1.24E-03	8.64E-03	7.05E-03	-9.67E-01
Ozone depletion Pot.	kg CFC ₁₁ e	7.22E-08	3.86E-09	2.62E-08	1.02E-07	4.24E-09	1.15E-10	MNR	MNR	MNR	MNR	MNR	2.61E-06	MNR	MNR	2.27E-10	1.39E-10	8.55E-11	-2.28E-08
Acidification	kg SO ₂ e	1.32E-02	4.90E-04	7.70E-04	1.45E-02	7.66E-05	8.38E-06	MNR	MNR	MNR	MNR	MNR	2.87E-01	MNR	MNR	4.11E-06	1.44E-05	4.02E-06	-9.18E-03
Eutrophication	kg PO ₄ ³ e	4.04E-03	5.67E-05	3.14E-04	4.42E-03	1.74E-05	6.49E-06	MNR	MNR	MNR	MNR	MNR	2.21E-01	MNR	MNR	9.35E-07	5.04E-06	1.38E-05	-2.52E-03
POCP ("smog")	kg C ₂ H ₄ e	7.53E-04	1.28E-05	7.77E-05	8.44E-04	2.99E-06	2.39E-07	MNR	MNR	MNR	MNR	MNR	1.17E-02	MNR	MNR	1.60E-07	5.33E-07	2.77E-07	-4.47E-04
ADP-elements	kg Sbe	8.12E-05	3.72E-08	1.71E-06	8.29E-05	5.28E-08	3.37E-09	MNR	MNR	MNR	MNR	MNR	5.52E-04	MNR	MNR	2.83E-09	1.62E-07	1.97E-09	-2.98E-05
ADP-fossil	MJ	2.13E+01	3.11E-01	4.45E+00	2.61E+01	3.50E-01	1.14E-02	MNR	MNR	MNR	MNR	MNR	1.26E+03	MNR	MNR	1.87E-02	1.90E-02	1.07E-02	-9.65E+00

APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact (*S_I*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table A1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

Table A2 Scaled GWP per scaling factor (EPD Hub aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
915005668401 - 12862009 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE White Structure	224.0	3.0	74.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292707 - 12862014 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Bronze Brushed	236.0	3.0	78.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292708 - 12862015 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Champagne Brushed	244.0	3.0	81.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292709 - 12862016 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Silver Bronze Brushed	244.0	3.0	81.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005668501 - 12862032 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Black Structure	215.0	3.0	71.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292710 - 12862043 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Black Brushed	132.0	3.0	44.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005668601 - 12862046 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Gold Matt	220.0	3.0	73.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005668701 - 12862109 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE White Structure	224.0	3.0	74.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292711 - 12862114 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Bronze Brushed	236.0	3.0	78.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292712 - 12862115 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Champagne Brushed	244.0	3.0	81.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7

915006292713 - 12862116 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Silver Bronze Brushed	244.0	3.0	81.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005668801 - 12862132 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Black Structure	215.0	3.0	71.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292714 - 12862143 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Black Brushed	132.0	3.0	44.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005668901 - 12862146 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Gold Matt	220.0	3.0	73.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005669001 - 12862209 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE White Structure	241.0	3.0	80.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292715 - 12862214 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Bronze Brushed	254.0	3.0	84.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292716 - 12862215 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Champagne Brushed	263.0	3.0	87.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292717 - 12862216 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Silver Bronze Brushed	263.0	3.0	87.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005669101 - 12862232 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Black Structure	231.0	3.0	77.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292718 - 12862243 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Black Brushed	142.0	3.0	47.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005669201 - 12862246 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Gold Matt	237.0	3.0	79.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005670201 - 12872009 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE White Structure	152.0	3.0	50.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292747 - 12872014 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Bronze Brushed	151.0	3.0	50.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292748 - 12872015 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Champagne Brushed	163.0	3.0	54.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292749 - 12872016 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Silver Bronze Brushed	167.0	3.0	55.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7

915005670301 - 12872032 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Black Structure	129.0	3.0	43.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292750 - 12872043 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Black Brushed	148.0	3.0	49.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005670401 - 12872046 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Gold Matt	138.0	3.0	46.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005670501 - 12872109 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE White Structure	152.0	3.0	50.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292751 - 12872114 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Bronze Brushed	151.0	3.0	50.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292752 - 12872115 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Champagne Brushed	163.0	3.0	54.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292753 - 12872116 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Silver Bronze Brushed	167.0	3.0	55.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005670601 - 12872132 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Black Structure	129.0	3.0	43.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292754 - 12872143 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Black Brushed	148.0	3.0	49.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005670701 - 12872146 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Gold Matt	138.0	3.0	46.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005670801 - 12872209 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE White Structure	164.0	3.0	54.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292755 - 12872214 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Bronze Brushed	162.0	3.0	54.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292756 - 12872215 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Champagne Brushed	176.0	3.0	58.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292757 - 12872216 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Silver Bronze Brushed	179.0	3.0	59.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005670901 - 12872232 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Black Structure	139.0	3.0	46.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7

915006292758 - 12872243 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Black Brushed	160.0	3.0	53.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005671001 - 12872246 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Gold Matt	149.0	3.0	49.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005669301 - 12882009 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE White Structure	231.0	3.0	77.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292787 - 12882014 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Bronze Brushed	246.0	3.0	82.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292788 - 12882015 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Champagne Brushed	252.0	3.0	84.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292789 - 12882016 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Silver Bronze Brushed	246.0	3.0	82.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005669401 - 12882032 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Black Structure	208.0	3.0	69.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292790 - 12882043 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Black Brushed	255.0	3.0	85.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005669501 - 12882046 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Gold Matt	224.0	3.0	74.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005669601 - 12882109 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE White Structure	231.0	3.0	77.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292791 - 12882114 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Bronze Brushed	246.0	3.0	82.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292792 - 12882115 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Champagne Brushed	252.0	3.0	84.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292793 - 12882116 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Silver Bronze Brushed	246.0	3.0	82.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005669701 - 12882132 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Black Structure	208.0	3.0	69.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292794 - 12882143 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Black Brushed	255.0	3.0	85.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7

915005669801 - 12882146 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Gold Matt	224.0	3.0	74.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005669901 - 12882209 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE White Structure	249.0	3.0	83.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292795 - 12882214 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Bronze Brushed	264.0	3.0	88.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292796 - 12882215 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Champagne Brushed	272.0	3.0	90.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292797 - 12882216 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Silver Bronze Brushed	265.0	3.0	88.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005670001 - 12882232 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Black Structure	224.0	3.0	74.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292798 - 12882243 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Black Brushed	274.0	3.0	91.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005670101 - 12882246 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Gold Matt	241.0	3.0	80.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005667501 - 12892009 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE White Structure	206.0	3.0	68.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292828 - 12892014 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Bronze Brushed	207.0	3.0	69.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292829 - 12892015 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Champagne Brushed	222.0	3.0	74.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292830 - 12892016 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Silver Bronze Brushed	225.0	3.0	75.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005667601 - 12892032 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Black Structure	186.0	3.0	62.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292831 - 12892043 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Black Brushed	205.0	3.0	68.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005667701 - 12892046 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Gold Matt	198.0	3.0	66.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7

915005667801 - 12892109 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE White Structure	206.0	3.0	68.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292832 - 12892114 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Bronze Brushed	207.0	3.0	69.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292833 - 12892115 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Champagne Brushed	222.0	3.0	74.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292834 - 12892116 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Silver Bronze Brushed	225.0	3.0	75.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005667901 - 12892132 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Black Structure	186.0	3.0	62.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292835 - 12892143 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Black Brushed	205.0	3.0	68.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005668001 - 12892146 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Gold Matt	198.0	3.0	66.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005668101 - 12892209 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE White Structure	222.0	3.0	74.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292836 - 12892214 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Bronze Brushed	223.0	3.0	74.3	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292837 - 12892215 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Champagne Brushed	239.0	3.0	79.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292838 - 12892216 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Silver Bronze Brushed	242.0	3.0	80.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005668201 - 12892232 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Black Structure	200.0	3.0	66.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915006292839 - 12892243 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Black Brushed	221.0	3.0	73.7	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7
915005668301 - 12892246 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Gold Matt	213.0	3.0	71.0	1.0	1.0	0.75	0.75	0.55	59.4	44.5	44.5	32.7

* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" for are valid.

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ($PGSF$), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table A3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
915005668401 - 12862009 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE White Structure	224.0	3.0	74.7	1.0	3.125	2.344	2.344	1.719	185.6	139.2	139.2	102.1
915006292707 - 12862014 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Bronze Brushed	236.0	3.0	78.7	1.0	2.966	2.224	2.224	1.631	176.2	132.1	132.1	96.9
915006292708 - 12862015 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Champagne Brushed	244.0	3.0	81.3	1.0	2.869	2.152	2.152	1.578	170.4	127.8	127.8	93.7
915006292709 - 12862016 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Silver Bronze Brushed	244.0	3.0	81.3	1.0	2.869	2.152	2.152	1.578	170.4	127.8	127.8	93.7

915005668501 - 12862032 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Black Structure	215.0	3.0	71.7	1.0	3.256	2.442	2.442	1.791	193.4	145.1	145.1	106.4
915006292710 - 12862043 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Black Brushed	132.0	3.0	44.0	1.0	5.303	3.977	3.977	2.917	315.0	236.2	236.2	173.3
915005668601 - 12862046 Smart Lotis Recessed 48 1x HO IP55 LED 3000K Medium DE Gold Matt	220.0	3.0	73.3	1.0	3.182	2.386	2.386	1.75	189.0	141.7	141.7	104.0
915005668701 - 12862109 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE White Structure	224.0	3.0	74.7	1.0	3.125	2.344	2.344	1.719	185.6	139.2	139.2	102.1
915006292711 - 12862114 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Bronze Brushed	236.0	3.0	78.7	1.0	2.966	2.224	2.224	1.631	176.2	132.1	132.1	96.9
915006292712 - 12862115 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Champagne Brushed	244.0	3.0	81.3	1.0	2.869	2.152	2.152	1.578	170.4	127.8	127.8	93.7
915006292713 - 12862116 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Silver Bronze Brushed	244.0	3.0	81.3	1.0	2.869	2.152	2.152	1.578	170.4	127.8	127.8	93.7
915005668801 - 12862132 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Black Structure	215.0	3.0	71.7	1.0	3.256	2.442	2.442	1.791	193.4	145.1	145.1	106.4
915006292714 - 12862143 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Black Brushed	132.0	3.0	44.0	1.0	5.303	3.977	3.977	2.917	315.0	236.2	236.2	173.3
915005668901 - 12862146 Smart Lotis Recessed 48 1x HO IP55 LED 2700K Medium DE Gold Matt	220.0	3.0	73.3	1.0	3.182	2.386	2.386	1.75	189.0	141.7	141.7	104.0
915005669001 - 12862209 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE White Structure	241.0	3.0	80.3	1.0	2.905	2.179	2.179	1.598	172.6	129.4	129.4	94.9
915006292715 - 12862214 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Bronze Brushed	254.0	3.0	84.7	1.0	2.756	2.067	2.067	1.516	163.7	122.8	122.8	90.1
915006292716 - 12862215 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Champagne Brushed	263.0	3.0	87.7	1.0	2.662	1.996	1.996	1.464	158.1	118.6	118.6	87.0
915006292717 - 12862216 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Silver Bronze Brushed	263.0	3.0	87.7	1.0	2.662	1.996	1.996	1.464	158.1	118.6	118.6	87.0
915005669101 - 12862232 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Black Structure	231.0	3.0	77.0	1.0	3.03	2.272	2.272	1.667	180.0	135.0	135.0	99.0

915006292718 - 12862243 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Black Brushed	142.0	3.0	47.3	1.0	4.93	3.697	3.697	2.712	292.8	219.6	219.6	161.1
915005669201 - 12862246 Smart Lotis Recessed 48 1x HO IP55 LED 4000K Medium DE Gold Matt	237.0	3.0	79.0	1.0	2.954	2.216	2.216	1.625	175.5	131.6	131.6	96.5
915005670201 - 12872009 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE White Structure	152.0	3.0	50.7	1.0	4.605	3.454	3.454	2.533	273.5	205.2	205.2	150.5
915006292747 - 12872014 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Bronze Brushed	151.0	3.0	50.3	1.0	4.636	3.477	3.477	2.55	275.4	206.5	206.5	151.5
915006292748 - 12872015 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Champagne Brushed	163.0	3.0	54.3	1.0	4.294	3.22	3.22	2.362	255.1	191.3	191.3	140.3
915006292749 - 12872016 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Silver Bronze Brushed	167.0	3.0	55.7	1.0	4.192	3.144	3.144	2.306	249.0	186.8	186.8	137.0
915005670301 - 12872032 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Black Structure	129.0	3.0	43.0	1.0	5.426	4.069	4.069	2.984	322.3	241.7	241.7	177.2
915006292750 - 12872043 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Black Brushed	148.0	3.0	49.3	1.0	4.73	3.548	3.548	2.602	281.0	210.8	210.8	154.6
915005670401 - 12872046 Smart Cake Recessed 48 1x HO IP55 LED 3000K Medium DE Gold Matt	138.0	3.0	46.0	1.0	5.072	3.804	3.804	2.79	301.3	226.0	226.0	165.7
915005670501 - 12872109 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE White Structure	152.0	3.0	50.7	1.0	4.605	3.454	3.454	2.533	273.5	205.2	205.2	150.5
915006292751 - 12872114 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Bronze Brushed	151.0	3.0	50.3	1.0	4.636	3.477	3.477	2.55	275.4	206.5	206.5	151.5
915006292752 - 12872115 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Champagne Brushed	163.0	3.0	54.3	1.0	4.294	3.22	3.22	2.362	255.1	191.3	191.3	140.3
915006292753 - 12872116 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Silver Bronze Brushed	167.0	3.0	55.7	1.0	4.192	3.144	3.144	2.306	249.0	186.8	186.8	137.0
915005670601 - 12872132 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Black Structure	129.0	3.0	43.0	1.0	5.426	4.069	4.069	2.984	322.3	241.7	241.7	177.2
915006292754 - 12872143 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Black Brushed	148.0	3.0	49.3	1.0	4.73	3.548	3.548	2.602	281.0	210.8	210.8	154.6

915005670701 - 12872146 Smart Cake Recessed 48 1x HO IP55 LED 2700K Medium DE Gold Matt	138.0	3.0	46.0	1.0	5.072	3.804	3.804	2.79	301.3	226.0	226.0	165.7
915005670801 - 12872209 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE White Structure	164.0	3.0	54.7	1.0	4.268	3.201	3.201	2.347	253.5	190.1	190.1	139.4
915006292755 - 12872214 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Bronze Brushed	162.0	3.0	54.0	1.0	4.321	3.241	3.241	2.377	256.7	192.5	192.5	141.2
915006292756 - 12872215 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Champagne Brushed	176.0	3.0	58.7	1.0	3.977	2.983	2.983	2.187	236.2	177.2	177.2	129.9
915006292757 - 12872216 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Silver Bronze Brushed	179.0	3.0	59.7	1.0	3.911	2.933	2.933	2.151	232.3	174.2	174.2	127.8
915005670901 - 12872232 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Black Structure	139.0	3.0	46.3	1.0	5.036	3.777	3.777	2.77	299.1	224.4	224.4	164.5
915006292758 - 12872243 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Black Brushed	160.0	3.0	53.3	1.0	4.375	3.281	3.281	2.406	259.9	194.9	194.9	142.9
915005671001 - 12872246 Smart Cake Recessed 48 1x HO IP55 LED 4000K Medium DE Gold Matt	149.0	3.0	49.7	1.0	4.698	3.524	3.524	2.584	279.1	209.3	209.3	153.5
915005669301 - 12882009 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE White Structure	231.0	3.0	77.0	1.0	3.03	2.272	2.272	1.667	180.0	135.0	135.0	99.0
915006292787 - 12882014 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Bronze Brushed	246.0	3.0	82.0	1.0	2.846	2.135	2.135	1.565	169.1	126.8	126.8	93.0
915006292788 - 12882015 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Champagne Brushed	252.0	3.0	84.0	1.0	2.778	2.083	2.083	1.528	165.0	123.7	123.7	90.8
915006292789 - 12882016 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Silver Bronze Brushed	246.0	3.0	82.0	1.0	2.846	2.135	2.135	1.565	169.1	126.8	126.8	93.0
915005669401 - 12882032 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Black Structure	208.0	3.0	69.3	1.0	3.365	2.524	2.524	1.851	199.9	149.9	149.9	109.9
915006292790 - 12882043 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Black Brushed	255.0	3.0	85.0	1.0	2.745	2.059	2.059	1.51	163.1	122.3	122.3	89.7
915005669501 - 12882046 Smart Kup Recessed 48 1x HO IP55 LED 3000K Medium DE Gold Matt	224.0	3.0	74.7	1.0	3.125	2.344	2.344	1.719	185.6	139.2	139.2	102.1

915005669601 - 12882109 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE White Structure	231.0	3.0	77.0	1.0	3.03	2.272	2.272	1.667	180.0	135.0	135.0	99.0
915006292791 - 12882114 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Bronze Brushed	246.0	3.0	82.0	1.0	2.846	2.135	2.135	1.565	169.1	126.8	126.8	93.0
915006292792 - 12882115 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Champagne Brushed	252.0	3.0	84.0	1.0	2.778	2.083	2.083	1.528	165.0	123.7	123.7	90.8
915006292793 - 12882116 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Silver Bronze Brushed	246.0	3.0	82.0	1.0	2.846	2.135	2.135	1.565	169.1	126.8	126.8	93.0
915005669701 - 12882132 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Black Structure	208.0	3.0	69.3	1.0	3.365	2.524	2.524	1.851	199.9	149.9	149.9	109.9
915006292794 - 12882143 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Black Brushed	255.0	3.0	85.0	1.0	2.745	2.059	2.059	1.51	163.1	122.3	122.3	89.7
915005669801 - 12882146 Smart Kup Recessed 48 1x HO IP55 LED 2700K Medium DE Gold Matt	224.0	3.0	74.7	1.0	3.125	2.344	2.344	1.719	185.6	139.2	139.2	102.1
915005669901 - 12882209 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE White Structure	249.0	3.0	83.0	1.0	2.811	2.108	2.108	1.546	167.0	125.2	125.2	91.8
915006292795 - 12882214 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Bronze Brushed	264.0	3.0	88.0	1.0	2.652	1.989	1.989	1.459	157.5	118.1	118.1	86.7
915006292796 - 12882215 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Champagne Brushed	272.0	3.0	90.7	1.0	2.574	1.93	1.93	1.416	152.9	114.6	114.6	84.1
915006292797 - 12882216 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Silver Bronze Brushed	265.0	3.0	88.3	1.0	2.642	1.982	1.982	1.453	156.9	117.7	117.7	86.3
915005670001 - 12882232 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Black Structure	224.0	3.0	74.7	1.0	3.125	2.344	2.344	1.719	185.6	139.2	139.2	102.1
915006292798 - 12882243 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Black Brushed	274.0	3.0	91.3	1.0	2.555	1.916	1.916	1.405	151.8	113.8	113.8	83.5
915005670101 - 12882246 Smart Kup Recessed 48 1x HO IP55 LED 4000K Medium DE Gold Matt	241.0	3.0	80.3	1.0	2.905	2.179	2.179	1.598	172.6	129.4	129.4	94.9
915005667501 - 12892009 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE White Structure	206.0	3.0	68.7	1.0	3.398	2.549	2.549	1.869	201.8	151.4	151.4	111.0

915006292828 - 12892014 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Bronze Brushed	207.0	3.0	69.0	1.0	3.382	2.537	2.537	1.86	200.9	150.7	150.7	110.5
915006292829 - 12892015 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Champagne Brushed	222.0	3.0	74.0	1.0	3.153	2.365	2.365	1.734	187.3	140.5	140.5	103.0
915006292830 - 12892016 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Silver Bronze Brushed	225.0	3.0	75.0	1.0	3.111	2.333	2.333	1.711	184.8	138.6	138.6	101.6
915005667601 - 12892032 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Black Structure	186.0	3.0	62.0	1.0	3.763	2.822	2.822	2.07	223.5	167.6	167.6	123.0
915006292831 - 12892043 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Black Brushed	205.0	3.0	68.3	1.0	3.415	2.561	2.561	1.878	202.9	152.1	152.1	111.6
915005667701 - 12892046 Smart Lotis Asy Recessed 48 1x HO IP55 LED 3000K Medium DE Gold Matt	198.0	3.0	66.0	1.0	3.535	2.651	2.651	1.944	210.0	157.5	157.5	115.5
915005667801 - 12892109 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE White Structure	206.0	3.0	68.7	1.0	3.398	2.549	2.549	1.869	201.8	151.4	151.4	111.0
915006292832 - 12892114 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Bronze Brushed	207.0	3.0	69.0	1.0	3.382	2.537	2.537	1.86	200.9	150.7	150.7	110.5
915006292833 - 12892115 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Champagne Brushed	222.0	3.0	74.0	1.0	3.153	2.365	2.365	1.734	187.3	140.5	140.5	103.0
915006292834 - 12892116 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Silver Bronze Brushed	225.0	3.0	75.0	1.0	3.111	2.333	2.333	1.711	184.8	138.6	138.6	101.6
915005667901 - 12892132 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Black Structure	186.0	3.0	62.0	1.0	3.763	2.822	2.822	2.07	223.5	167.6	167.6	123.0
915006292835 - 12892143 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Black Brushed	205.0	3.0	68.3	1.0	3.415	2.561	2.561	1.878	202.9	152.1	152.1	111.6
915005668001 - 12892146 Smart Lotis Asy Recessed 48 1x HO IP55 LED 2700K Medium DE Gold Matt	198.0	3.0	66.0	1.0	3.535	2.651	2.651	1.944	210.0	157.5	157.5	115.5
915005668101 - 12892209 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE White Structure	222.0	3.0	74.0	1.0	3.153	2.365	2.365	1.734	187.3	140.5	140.5	103.0
915006292836 - 12892214 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Bronze Brushed	223.0	3.0	74.3	1.0	3.139	2.354	2.354	1.726	186.5	139.8	139.8	102.5

915006292837 - 12892215 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Champagne Brushed	239.0	3.0	79.7	1.0	2.929	2.197	2.197	1.611	174.0	130.5	130.5	95.7
915006292838 - 12892216 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Silver Bronze Brushed	242.0	3.0	80.7	1.0	2.893	2.17	2.17	1.591	171.8	128.9	128.9	94.5
915005668201 - 12892232 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Black Structure	200.0	3.0	66.7	1.0	3.5	2.625	2.625	1.925	207.9	155.9	155.9	114.3
915006292839 - 12892243 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Black Brushed	221.0	3.0	73.7	1.0	3.167	2.375	2.375	1.742	188.1	141.1	141.1	103.5
915005668301 - 12892246 Smart Lotis Asy Recessed 48 1x HO IP55 LED 4000K Medium DE Gold Matt	213.0	3.0	71.0	1.0	3.286	2.465	2.465	1.807	195.2	146.4	146.4	107.3

*** Note that if the product is non-dimmable, only the values for “NC (No Control)” are valid; if the driver type is PSU, only the values for “NC (No Control)” and “PS (presence sensing)” for are valid.*

ANNEX

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

The table in this annex is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

This EPD was done according to a specific customer use location that can be read in the paragraph **PRODUCT USE AND MAINTENANCE (B1-B7)**.

If for example the EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ²¹	kg CO ₂ e	5,88E+00	2,61E-01	-1,25E-01	6,02E+00	3,02E-01	5,41E-01	MND	MND	MND	MND	MND	4,06E+02	MND	MNR	1,77E-02	2,62E-01	1,88E-01	-1,09E+01

Divide that value according to the EU value from the following table (EU = 3,96E-01) and then multiplying for the Finland value from the same table (FINLAND = 2,70E-01).

Thus, the calculation of this example would be:

$$\text{New B6 GWP tot for Finland} = (4,06E+02 / 3,96E-01) \times 2,70E-01 = 2,76 E+02$$

Country	GWP tot (kg CO2 eq. per kwh)
AUSTRALIA	9,59E-01
AUSTRIA	3,37E-01
BELGIUM	2,63E-01
CHINA	1,14E+00
DENMARK	2,91E-01
EU	3,96E-01
FINLAND	2,70E-01
FRANCE	8,77E-02
GERMANY	5,32E-01
HUNGARY	4,67E-01
IRELAND	4,26E-01
ITALY	3,94E-01
LATAM	3,50E-01
NAM	4,83E-01
NETHERLANDS	5,88E-01
NORWAY	2,59E-02
POLAND	1,05E+00

PORTUGAL	4,22E-01
ROW	7,32E-01
SPAIN	3,34E-01
SWEDEN	4,95E-02
SWITZERLAND	5,38E-02
UK	3,17E-01

Source Ecoinvent 3.8